

## 8251A

### *Programmable Communication Interface iAPX86 Family*

The 8251A is the enhanced version of the industry standard, 8251 Universal Synchronous/Asynchronous Receiver/Transmitter (USART), designed for data communications with microprocessor families, such as the iAPX86, 88. The 8251A is used as a peripheral device and is programmed by the CPU to operate using virtually any serial data transmission technique presently in use (including IBM “bi-sync”). The USART accepts data characters from the CPU in parallel format and then converts them into a continuous serial data stream for transmission. Simultaneously, it can receive serial data streams and convert them into parallel data characters for the CPU. The USART will signal the CPU whenever it can accept a new character for transmission or whenever it has received a character for the CPU. The CPU can read the complete status of the USART at any time. These include data transmission errors and control signals, such as SYNDT, TxEMPTY. The chip is fabricated using N-channel silicon gate technology.

#### **Rochester Electronics Manufactured Components**

Rochester branded components are manufactured using either die/wafers purchased from the original suppliers or Rochester wafers recreated from the original IP. All re-creations are done with the approval of the Original Component Manufacturer (OCM).

Parts are tested using original factory test programs or Rochester developed test solutions to guarantee product meets or exceeds the OCM data sheet.

#### **Quality Overview**

- ISO-9001
- AS9120 certification
- Qualified Manufacturers List (QML) MIL-PRF-35835
  - Class Q Military
  - Class V Space Level
- Qualified Suppliers List of Distributors (QSLD)
  - Rochester is a critical supplier to DLA and meets all industry and DLA standards.

Rochester Electronics, LLC is committed to supplying products that satisfy customer expectations for quality and are equal to those originally supplied by industry manufacturers.

*The original manufacturer’s datasheet accompanying this document reflects the performance and specifications of the Rochester manufactured version of this device. Rochester Electronics guarantees the performance of its semiconductor products to the original OCM specifications. ‘Typical’ values are for reference purposes only. Certain minimum or maximum ratings may be based on product characterization, design, simulation, or sample testing.*

#### **FOR REFERENCE ONLY**

# 8251A

Programmable Communication Interface  
iAPX86 Family

## DISTINCTIVE CHARACTERISTICS

- Synchronous and Asynchronous Operation
- Synchronous 5 – 8 Bit Characters; Internal or External Character Synchronization; Automatic Sync Insertion
- Asynchronous 5 – 8 Bit Characters; Clock Rate – 1, 16 or 64 Times Baud Rate; Break Character Generation; 1, 1 1/2, or 2 Stop Bits; False Start Bit Detection; Automatic Break Detect and Handling
- Synchronous Baud Rate – DC to 64K Baud
- Asynchronous Baud Rate – DC to 19.2K Baud
- Full-Duplex, Double-Buffered Transmitter and Receiver
- Error Detection – Parity, Overrun and Framing
- Compatible with an Extended Range of Microprocessors
- 28-Pin DIP Package
- All Inputs and Outputs are TTL Compatible

## GENERAL DESCRIPTION

The 8251A is the enhanced version of the industry standard, 8251 Universal Synchronous/Asynchronous Receiver/Transmitter (USART), designed for data communications with microprocessor families, such as the iAPX86, 88. The 8251A is used as a peripheral device and is programmed by the CPU to operate using virtually any serial data transmission technique presently in use (including IBM "bi-sync"). The USART accepts data characters from the CPU in parallel format and then converts them into a

continuous serial data stream for transmission. Simultaneously, it can receive serial data streams and convert them into parallel data characters for the CPU. The USART will signal the CPU whenever it can accept a new character for transmission or whenever it has received a character for the CPU. The CPU can read the complete status of the USART at any time. These include data transmission errors and control signals, such as SYNDET, TxEMPTY. The chip is fabricated using N-channel silicon gate technology.

## BLOCK DIAGRAM


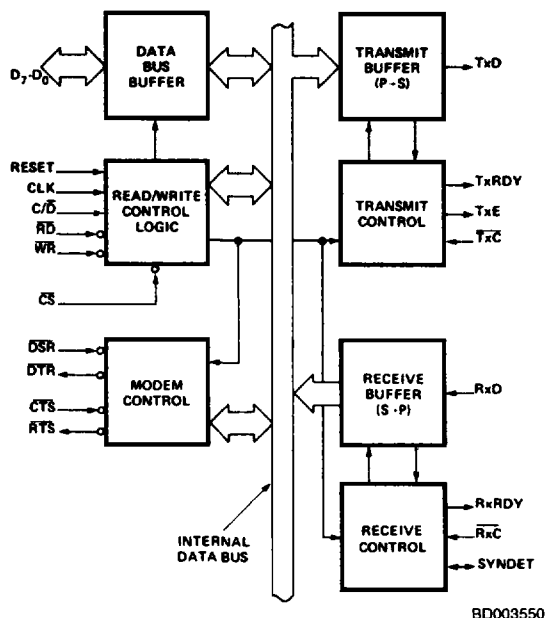


Figure 1.

# CONNECTION DIAGRAM Top View

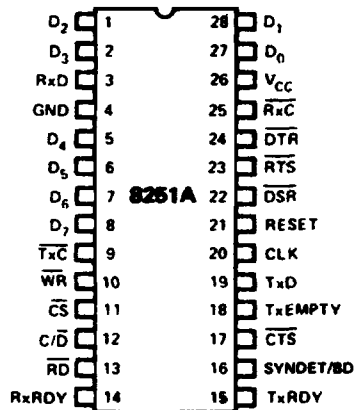


CD005380

Figure 2.

3

## ORDERING INFORMATION

AMD products are available in several packages and operating ranges. The order number is formed by a combination of the following: Device number, speed option (if applicable), package type, operating range and screening option (if desired).

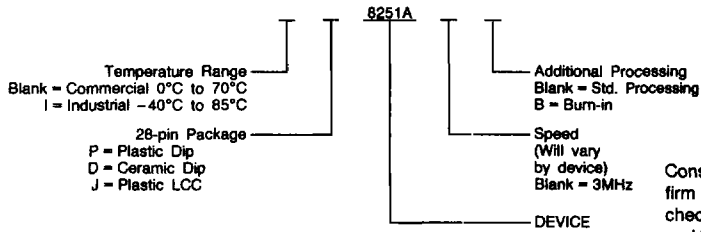

### Valid Combinations

8251A	P, D, ID
8251AB	P, D, ID
8251A	/BXA

### Valid Combinations

Consult the local AMD sales office to confirm availability of specific valid combinations, check for newly released valid combinations and/or obtain additional data on AMD's standard military grade product.

## PIN DESCRIPTION and RELATED INFORMATION

**CLK (Clock)**


The CLK input is used to generate internal device timing and is normally connected to the Phase 2 (TTL) output of the Clock Generator. No external inputs or outputs are referenced to CLK but the frequency of CLK must be greater than 30 times the receiver or Transmitter data bit rates.

**WR (Write)**

A "LOW" on this input informs the 8251A that the CPU is writing data or control words to the 8251A.

**RD (Read)**

A "LOW" on this input informs the 8251A that the CPU is reading data or status information from the 8251A.

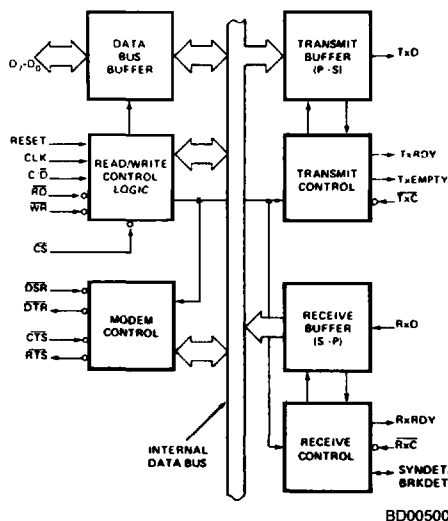

BD005001

**Figure 3. 8251A Block Diagram Showing Data Bus Buffer and Read/Write Logic Functions**

C/D	RD	W	CS	
0	0	1	0	8251A DATA → DATA BUS
0	1	0	0	DATA BUS → 8251A DATA
1	0	1	0	STATUS → DATA BUS
1	1	0	0	DATA BUS → CONTROL
X	1	1	0	DATA BUS → 3 STATE
X	X	X	1	DATA BUS → 3 STATE

**C/D (Control/Data)**

This input, in conjunction with the WR and RD inputs, informs the 8251A that the word on the Data Bus is either a data character, control word or status information.

1 = CONTROL/STATUS; 0 = DATA.

**CS (Chip Select)**

A "LOW" on this input selects the 8251A. No reading or writing will occur unless the device is selected. When CS is high, the Data Bus is in the float state and RD and WR have no effect on the chip.

**Modem Control**

The 8251A has a set of control inputs and outputs that can be used to simplify the interface to almost any modem. The modem control signals are general purpose in nature and can be used for functions other than modem control, if necessary.

**DSR (Data Set Ready)**

The DSR input signal is a general-purpose, 1-bit inverting input port. Its condition can be tested by the CPU using a Status Read operation. The DSR input is normally used to test modem conditions such as Data Set Ready.

**DTR (Data Terminal Ready)**

The DTR output signal is a general-purpose, 1-bit inverting output port. It can be set "LOW" by programming the appropriate bit in the Command Instruction word. The DTR output signal is normally used for modem control such as Data Terminal Ready.

**RTS (Request to Send)**

The RTS output signal is a general-purpose, 1-bit inverting output port. It can be set "LOW" by programming the appropriate bit in the Command Instruction word. The RTS output signal is normally used for modem control such as Request to Send.

**CTS (Clear to Send)**

A "LOW" on this input enables the 8251A to transmit serial data if the Tx Enable bit in the Command byte is set to a "one." If either a Tx Enable off or CTS off condition occurs while the Tx is in operation, the Tx will transmit all the data in the USART, written prior to Tx Disable command before shutting down.

**Transmitter Buffer**

The Transmitter Buffer accepts parallel data from the Data Bus Buffer, converts it to a serial bit stream, inserts the appropriate characters or bits (based on the communication technique) and outputs a composite serial stream of data on the Tx0 output pin on the falling edge of TxC. The transmitter will begin transmission upon being enabled if CTS = 0. The Tx0 line will be held in the marking state immediately upon a master Reset or when Tx Enable or CTS is off or the transmitter is empty.

**Transmitter Control**

The Transmitter Control manages all activities associated with the transmission of serial data. It accepts and issues signals both externally and internally to accomplish this function.

**TxRDY (Transmitter Ready)**

This output signals the CPU that the transmitter is ready to accept a data character. The TxRDY output pin can be used as an interrupt to the system, since it is masked by TxEnable; or for Polled operation, the CPU can check TxRDY using a Status Read operation. TxRDY is automatically reset by the leading edge of WR when a data character is loaded from the CPU.


Note that when using the Polled operation, the TxRDY status bit is not masked by TxEnable, but will only indicate the Empty/Full Status of the Tx Data Input Register.

**TxE (Transmitter Empty)**

When the 8251A has no characters to send, the TxEMPTY output will go "HIGH." It resets upon receiving a character from CPU if the transmitter is enabled. TxEMPTY remains high

when the transmitter is disabled. TxEMPTY can be used to indicate the end of a transmission mode, so that the CPU "knows" when to "turn the line around" in the half-duplex operational mode.

In the Synchronous mode, a "high" on this output indicates that a character has not been loaded and the SYNC character or characters are about to be or are being transmitted automatically as "fillers." TxEMPTY does not go LOW when the SYNC characters are being shifted out.

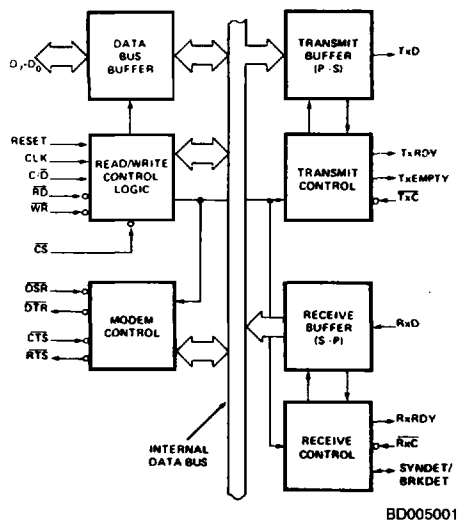

**Figure 4. 8251A Block Diagram Showing Modem and Transmitter Buffer and Control Functions**

### **$\overline{\text{TxCK}}$ (Transmitter Clock)**

The Transmitter Clock controls the rate at which the character is to be transmitted. In the Synchronous transmission mode, the Baud Rate (1x) is equal to the  $\overline{\text{TxCK}}$  frequency. In Asynchronous transmission mode, the baud rate is a fraction of the actual  $\overline{\text{TxCK}}$  frequency. A portion of the mode instruction selects this factor; it can be 1, 1/16 or 1/64 the  $\overline{\text{TxCK}}$ .

For Example:

If Baud Rate equals 110 Baud,  
 $\overline{\text{TxCK}}$  equals 110 Hz in the 1x mode.  
 $\overline{\text{TxCK}}$  equals 1.72 kHz in the 16x mode.  
 $\overline{\text{TxCK}}$  equals 7.04 kHz in the 64x mode.

The falling edge of  $\overline{\text{TxCK}}$  shifts the serial data out of the 8251A.

### **Receiver Buffer**

The Receiver accepts serial data, converts this serial input to parallel format, checks for bits or characters that are unique to the communication technique and sends an "assembled" character to the CPU. Serial data is input to RxD pin and is clocked in on the rising edge of  $\overline{\text{RxCK}}$ .

### **Receiver Control**

This functional block manages all receiver-related activities which consist of the following features.

The RxD initialization circuit prevents the 8251A from mistaking an unused input line for an active low data line in the "break condition." Before starting to receive serial characters on the RxD line, a valid "1" must first be detected after a chip master Reset. Once this has been determined, a search for a valid LOW (Start bit) is enabled. This feature is only active in the asynchronous mode and is only done once for each master Reset.

The False Start bit detection circuit prevents false starts due to a transient noise spike by first detecting the falling edge and then strobing the nominal center of the Start bit ( $\text{Rx}D = \text{LOW}$ ).

Parity error detection sets the corresponding status bit.

The Framing Error status bit is set if the Stop bit is absent at the end of the data byte (asynchronous mode).

### **RxDY (Receiver Ready)**

This output indicates that the 8251A contains a character that is ready to be input to the CPU. RxDY can be connected to the interrupt structure of the CPU or, for polled operation, the CPU can check the condition of RxDY using a Status Read operation.

RxEnable, when off, holds RxDY in the Reset Condition. For Asynchronous mode, to set RxDY, the Receiver must be enabled to sense a Start Bit, and a complete character must be assembled and transferred to the Data Output Register. For Synchronous mode, to set RxDY, the Receiver must be enabled, and a character must finish assembly and be transferred to the Data Output Register.

Failure to read the received character from the Rx Data Output Register prior to the assembly of the next Rx Data character will set overrun condition error, and the previous character will be written over and lost. If the Rx Data is being read by the CPU when the internal transfer is occurring, overrun error will be set, and the old character will be lost.

### **$\overline{\text{RxCK}}$ (Receiver Clock)**

The Receiver Clock controls the rate at which the character is to be received. In Synchronous Mode, the Baud Rate (1x) is equal to the actual frequency of  $\overline{\text{RxCK}}$ . In Asynchronous Mode, the Baud Rate is a fraction of the actual  $\overline{\text{RxCK}}$  frequency. A portion of the mode instruction selects this factor: 1, 1/16 or 1/64 the  $\overline{\text{RxCK}}$ .

For example:

Baud Rate equals 300 Baud, if  
 $\overline{\text{RxCK}}$  equals 300 Hz in the 1x mode;  
 $\overline{\text{RxCK}}$  equals 4800 Hz in the 16x mode;  
 $\overline{\text{RxCK}}$  equals 19.2 kHz in the 64x mode.

Baud Rate equals 2400 Baud, if  
 $\overline{\text{RxCK}}$  equals 2400 Hz in the 1x mode;  
 $\overline{\text{RxCK}}$  equals 38.4 kHz in the 16x mode;  
 $\overline{\text{RxCK}}$  equals 153.6 kHz in the 64x mode.

Data is sampled into the 8251A on the rising edge of  $\overline{\text{RxCK}}$ .

**NOTE:** In most communications systems, the 8251A will be handling both the transmission and reception operations of a single link. Consequently, the Receive and Transmit Baud Rates will be the same. Both  $\overline{\text{TxCK}}$  and  $\overline{\text{RxCK}}$  will require identical frequencies for this operation and can be tied together and connected to a single frequency source (Baud Rate Generator) to simplify the interface.

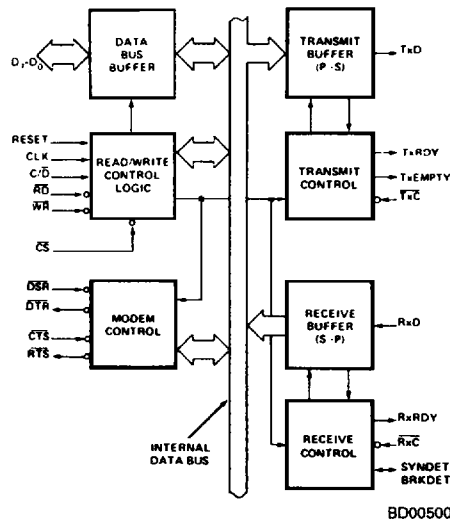


Figure 5. 8251A Block Diagram Showing Receiver Buffer and Control Functions

### SYNDET (SYNC Detect/ BRKDET Break Detect)

This pin is used in Synchronous Mode for SYNDET and may be used as either input or output, programmable through the Control Word. It is reset to output mode LOW upon RESET. When used as an output (internal Sync mode), the SYNDET pin will go "HIGH" to indicate that the 8251A has located the SYNC character in the Receive mode. If the 8251A is programmed to use double Sync characters (bisync), then SYNDET will go "HIGH" in the middle of the last bit of the second Sync character. SYNDET is automatically reset upon a Status Read operation.

When used as an input (external SYNC detect mode), a positive going signal will cause the 8251A to start assembling data characters on the rising edge of the next RxC. Once in SYNC, the "HIGH" input signal can be removed. When External SYNC Detect is programmed, Internal SYNC Detect is disabled.

### BREAK (Async Mode Only)

This output will go HIGH whenever the receiver remains LOW through two consecutive stop bit sequences (including the start bits, data bits, and parity bits). Break Detect may also be read as a Status bit. It is reset only upon a master chip Reset or Rx Data returning to a "one" state.

### FEATURES AND ENHANCEMENTS

The 8251A is an advanced design of the industry standard USART, the 8251. The 8251A operates with an extended range of microprocessors and maintains compatibility with the 8251. Familiarization time is minimal because of compatibility and involves only knowing the additional features and enhancements, and reviewing the AC and DC specifications of the 8251A.

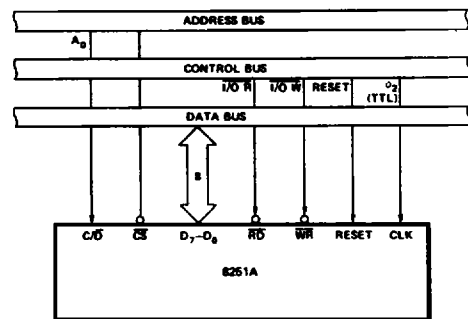


Figure 6. 8251A Interface to 8080A Standard System Bus

The 8251A incorporates all the key features of the 8251 and has the following additional features and enhancements:

- 8251A has double-buffered data paths with separate I/O registers for control, status, Data In, and Data Out, which considerably simplifies control programming and minimizes CPU overhead.
- In asynchronous operations, the Receiver detects and handles "break" automatically, relieving the CPU of this task.
- A refined Rx initialization prevents the Receiver from starting when in "break" state, preventing unwanted interrupts from a disconnected USART.
- At the conclusion of a transmission, Tx D line will always return to the marking state unless SBRK is programmed.
- Tx Enable logic enhancement prevents a Tx Disable command from halting transmission until all data previously written has been transmitted. The logic also prevents the transmitter from turning off in the middle of a word.

- When External Sync Detect is programmed, Internal Sync Detect is disabled, and an External Sync Detect status is provided via a flip-flop which clears itself upon a status read.
- Possibility of false sync detect is minimized by ensuring that, if double character sync is programmed, the characters be contiguously detected and the Rx register cleared to all ones whenever the Enter Hunt command is issued in Sync mode.
- As long as the 8251A is not selected, the  $\overline{RD}$  and  $\overline{WR}$  do not affect the internal operation of the device.
- The 8251A Status can be read at any time, but the status update will be inhibited during status read.
- The 8251A is free from extraneous glitches and has enhanced AC and DC characteristics, providing higher speed and better operating margins.
- Synchronous Baud rate from DC to 64K.

## PRODUCT OVERVIEW

### General

The 8251A is a Universal Synchronous/Asynchronous Receiver/Transmitter designed for a wide range of microcomputers, such as the 8080A, 8085, 8086 and 8088. Like other I/O devices in a microcomputer system, its functional configuration is programmed by the system's software for maximum flexibility. The 8251A can support most serial data techniques in use, including IBM "bi-sync."

In a communication environment, an interface device must convert parallel format system data into serial format for transmission and convert incoming serial format data into parallel system data for reception. The interface device must also delete or insert bits or characters that are functionally unique to the communication technique. In essence, the interface should appear "transparent" to the CPU, a simple input or output of byte-oriented system data.

### Data Bus Buffer

This 3-state, bidirectional, 8-bit buffer is used to interface the 8251A to the system Data Bus. Data is transmitted or received by the buffer upon execution of Input or Output instructions of the CPU. Control words, Command words and Status information are also transferred through the Data Bus Buffer. The Command Status, Data-In and Data-Out registers are separate, 8-bit registers communicating with the system bus through the Data Bus Buffer.

This functional block accepts inputs from the system Control bus and generates control signals for overall device operation. It contains the Control Word Register and Command Word Register that store the various control formats for the device functional definition.

### RESET (Reset)

A "HIGH" on this input forces the 8251A into an "Idle" mode. The device will remain at "Idle" until a new set of control words is written into the 8251A to program its functional definition. Minimum RESET pulse width is 6  $t_{cy}$  (clock must be running).

A command reset operation also puts the device into the "Idle" state.

## DETAILED DESCRIPTION


### General

The complete functional definition of the 8251A is programmed by the system's software. A set of control words must be sent out by the CPU to initialize the 8251A to support the desired communications format. These control words will program the: BAUD RATE, CHARACTER LENGTH, NUMBER

OF STOP BITS, SYNCHRONOUS or ASYNCHRONOUS OPERATION, EVEN/ODD/OFF PARITY, etc. In the Synchronous Mode, options are also provided to select either internal or external character synchronization.

Once programmed, the 8251A is ready to perform its communication functions. The TxRDY output is raised "HIGH" to signal the CPU that the 8251A is ready to receive a data character from the CPU. This output (TxRDY) is reset automatically when the CPU writes a character into the 8251A. On the other hand, the 8251A receives serial data from the MODEM or I/O device. Upon receiving an entire character, the RxRDY output is raised "HIGH" to signal the CPU that the 8251A has a complete character ready for the CPU to fetch. RxRDY is reset automatically upon the CPU data read operation.

The 8251A cannot begin transmission until the Tx Enable (Transmitter Enable) bit is set in the Command Instruction and it has received a Clear To Send (CTS) input. The Tx output will be held in the marking state upon Reset.

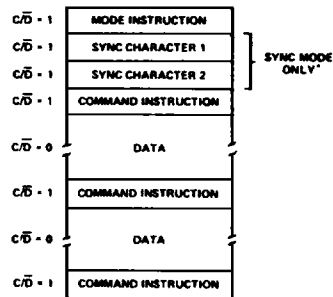

DF003920

\*THE SECOND SYNC CHARACTER IS SKIPPED IF MODE INSTRUCTION HAS PROGRAMMED THE 8251A TO SINGLE CHARACTER SYNC MODE. BOTH SYNC CHARACTERS ARE SKIPPED IF MODE INSTRUCTION HAS PROGRAMMED THE 8251A TO ASYNC MODE.

Figure 7. Typical Data Block

### Programming the 8251A

Prior to starting data transmission or reception, the 8251A must be loaded with a set of control words penetrated by the CPU. These control signals define the complete functional definition of the 8251A and must immediately follow a Reset operation (internal or external).

The control words are split into two formats:

1. Mode Instruction
2. Command Instruction

### Mode Instruction

This instruction defines the general operational characteristics of the 8251A. It must follow a Reset operation (internal or external). Once the Mode Instruction has been written into the 8251A by the CPU, SYNC characters or Command Instructions may be written.

### Command Instruction

This instruction defines a word that is used to control the actual operation of the 8251A.

Both the Mode and Command Instructions must conform to a specified sequence for proper device operation (see Figure 7). The Mode Instruction must be written immediately following a Reset operation, prior to using the 8251A for data communication.

All control words written into the 8251A after the Mode Instruction will load the Command Instruction. Command Instructions can be written into the 8251A at any time in the data block during the operation of the 8251A. To return to the Mode Instruction format, the master Reset bit in the Command Instruction word can be set to initiate an internal Reset operation which automatically places the 8251A back into the Mode Instruction format. Command Instructions must follow the Mode Instructions or Sync characters.

### Mode Instruction Definition

The 8251A can be used for either Asynchronous or Synchronous data communication. To understand how the Mode Instruction defines the functional operation of the 8251A, the designer can best view the device as two separate components, one Asynchronous and the other Synchronous, sharing the same package. The format definition can be changed only after a master chip Reset. For explanation purposes the two formats will be isolated.

**NOTE:** When parity is enabled, it is not considered as one of the data bits for the purpose of programming the word length. The actual parity bit received on the Rx Data line cannot be read on the Data Bus. In the case of a programmed character length of less than 8 bits, the least significant Data Bus bits will hold the data; unused bits are "don't care" when writing data to the 8251A and will be "zeros" when reading the data from the 8251A.

### Asynchronous Mode (Transmission)

Whenever a data character is sent by the CPU, the 8251A automatically adds a Start bit (low level) followed by the data bits (least significant bit first) and the programmed number of Stop bits to each character. Also, an even or odd Parity bit is inserted prior to the Stop bit(s), as defined by the Mode Instruction. The character is then transmitted as a serial data stream on the Tx/D output. The serial data is shifted out on the falling edge of Tx/C at a rate equal to 1, 1/16, or 1/64 that of the Tx/C, as defined by the Mode Instruction. BREAK characters can be continuously sent to the Tx/D if commanded to do so.

When no data characters have been loaded into the 8251A, the Tx/D output remains "HIGH" (marking) unless a Break (continuously LOW) has been programmed.


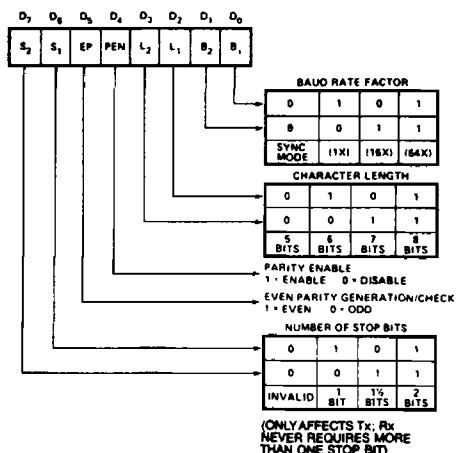


Figure 8. Mode Instruction Format, Asynchronous Mode

### Asynchronous Mode (Receive)

The Rx/D line is normally HIGH. A falling edge on this line triggers the beginning of a START bit. The validity of this START bit is checked by again strobing this bit at its nominal center (16X or 64X mode only). If a LOW is detected again, it is a valid START bit, and the bit counter will start counting. The bit counter thus locates the center of the data bits, the parity bit (if it exists) and the STOP bits. If parity error occurs, the parity error flag is set. Data and parity bits are sampled on the Rx/D pin with the rising edge of Rx/C. If a low level is detected as the STOP bit, the Framing Error flag will be set. The STOP bit signals the end of a character. Note that the receiver requires only one STOP bit, regardless of the number of STOP bits programmed. This character is then loaded into the parallel I/O buffer of the 8251A. The RxRDY pin is raised to signal the CPU that a character is ready to be fetched. If a previous character has not been fetched by the CPU, the present character replaces it in the I/O buffer, and the OVERRUN Error flag is raised (thus the previous character is lost). All of the error flags can be reset by an Error Reset Instruction. The occurrence of any of these errors will not affect the operation of the 8251A.

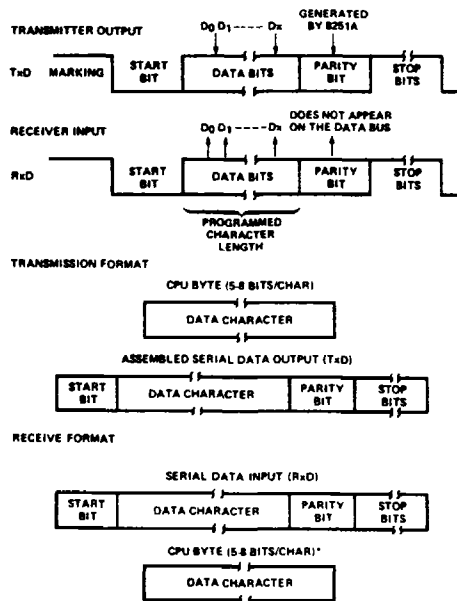

DF003940

\*Note: IF CHARACTER LENGTH IS DEFINED AS 5, 6 OR 7 BITS THE UNUSED BITS ARE SET TO "ZERO."

Figure 9. Asynchronous Mode


### Synchronous Mode (Transmission)

The Tx/D output is continuously HIGH until the CPU sends its first character to the 8251A which usually is a SYNC character. When the CTS line goes LOW, the first character is serially transmitted out. All characters are shifted out on the falling edge of Tx/C. Data is shifted out at the same rate as the Tx/C.

Once transmission has started, the data stream at the Tx/D output must continue at the Tx/C rate. If the CPU does not provide the 8251A with a data character before the 8251A Transmitter Buffers become empty, the SYNC characters (or character if in single SYNC character mode) will be automatically inserted in the Tx/D data stream. In this case, the



TxEMPTY pin is raised HIGH to signal that the 8251A is empty and SYNC characters are being sent out. TxEMPTY does not go LOW when the SYNC is being shifted out (see figure below). The TxEMPTY pin is internally reset by a data character being written into the 8251A.

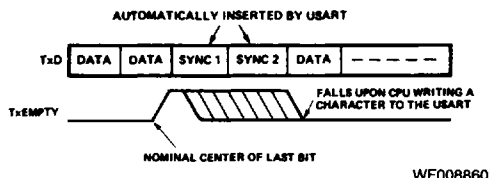


### Synchronous Mode (Receive)

In this mode, character synchronization can be internally or externally achieved. If the SYNC mode has been programmed, ENTER HUNT command should be included in the first comand instruction word written. Data on the RxD pin is then sampled on the rising edge of RxC. The content of the Rx buffer is compared at every bit boundary with the first SYNC character until a match occurs. If the 8251A has been programmed for two SYNC characters, the subsequent received character is also compared. When both SYNC characters have been detected, the USART ends the HUNT mode and is in character synchronization. The SYNDET pin is then set HIGH and is reset automatically by a STATUS READ. If parity is programmed, SYNDET will not be set until the middle of the parity bit instead of the middle of the last data bit.

In the external SYNC mode, synchronization is achieved by applying a high level on the SYNDET pin, thus forcing the 8251A out of the HUNT mode. The high level can be removed after one RxC cycle. An ENTER HUNT command has no effect in the asynchronous mode of operation.


Parity error and overrun error are both checked in the same way as in the Asynchronous Rx mode. Parity is checked when not in Hunt, regardless of whether the Receiver is enabled or not.

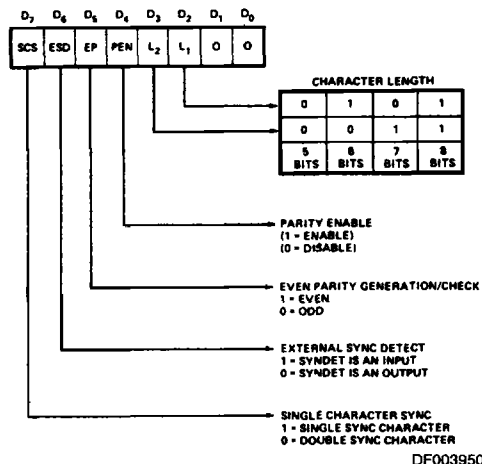

Note: IN EXTERNAL SYNC MODE, PROGRAMMING DOUBLE CHARACTER SYNC WILL AFFECT ONLY THE Tx.

**Figure 10. Mode Instruction Format, Synchronous Mode**

The CPU can command the receiver to enter the HUNT mode if synchronization is lost. This will also set all the used character bits in the buffer to a "one," thus preventing a possible false SYNDET caused by data that happens to be in the Rx Buffer at ENTER HUNT time. Note that the SYNDET F/F is reset at each Status Read, regardless of whether internal or external SYNC has been programmed. This does not cause the 8251A to return to the HUNT mode. When in SYNC mode, but not in HUNT, Sync Detection is still functional, but only occurs at the "known" word boundaries. Thus, if one Status Read indicates SYNDET and a second Status Read also indicates SYNDET, then the programmed SYNDET characters have been received since the previous Status Read. (If double character sync has been programmed, then both sync characters have been contiguously received to gate a SYNDET indication.) When external SYNDET mode is selected, internal Sync Detect is disabled, and the SYNDET F/F may be set at any bit boundary.

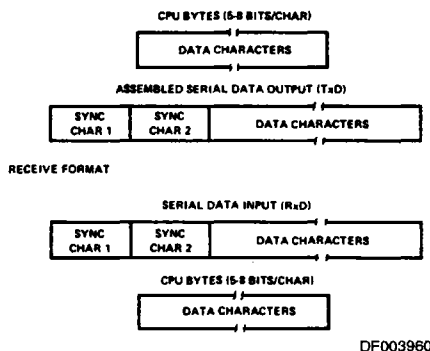

**Figure 11. Data Format, Synchronous Mode**


### COMMAND INSTRUCTION DEFINITION

Once the functional definition of the 8251A has been programmed by the Mode Instruction and the sync characters are loaded (if in Sync Mode), then the device is ready to be used for data communication. The Command Instruction controls the actual operation of the selected format. Functions, such as Enable Transmit/Receive, Error Reset and Modem Controls, are provided by the Command Instruction.

Once the Mode Instruction has been written into the 8251A and Sync characters inserted, if necessary, then all further "control writes" (C/D = 1) will load a Command Instruction. A Reset Operation (internal or external) will return the 8251A to the Mode Instruction format.

**Note:** Internal Reset on Power-up

When power is first applied, the 8251A may come up in the Mode, Sync character or Command format. To guarantee that the device is in the Command Instruction format before the Reset command is issued, it is safest to execute the worst-case initialization sequence (sync mode with two sync characters). Loading three 00Hs consecutively into the device with C/D = 1 configures sync operation and writes two dummy 00H sync characters. An Internal Reset command (40H) may then be issued to return the device to the "Idle" state.

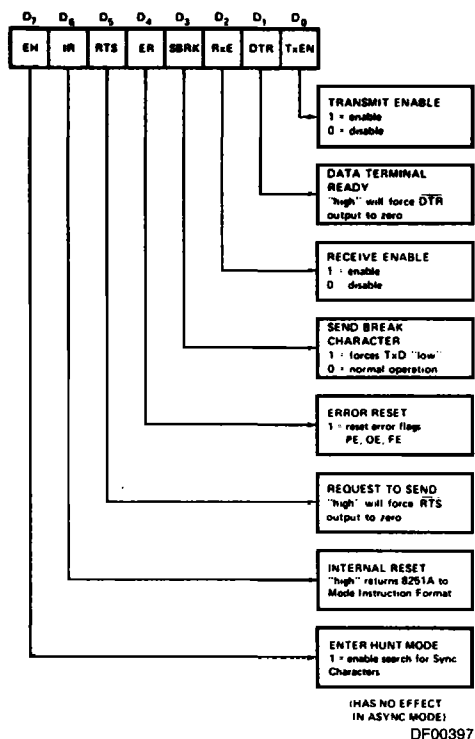

Note: Error Reset must be performed whenever RxEnable and Enter Hunt are programmed.

Figure 12. Command Instruction Format


## STATUS READ DEFINITION

In data communication systems, it is often necessary to examine the "status" of the active device to ascertain if errors have occurred or other conditions that require the processor's attention. The 8251A has facilities that allow the programmer to "read" the status of the device at any time during the functional operation. (Status update is inhibited during status read.)

A normal "read" command is issued by the CPU with  $C/\bar{D} = 1$  to accomplish this function.

Some of the bits in the Status Read Format have identical meanings to external output pins, so that the 8251A can be used in a completely polled or interrupt-driven environment. TxRDY is an exception.

Note that status update can have a maximum delay of 28 clock periods from the actual event affecting the status.

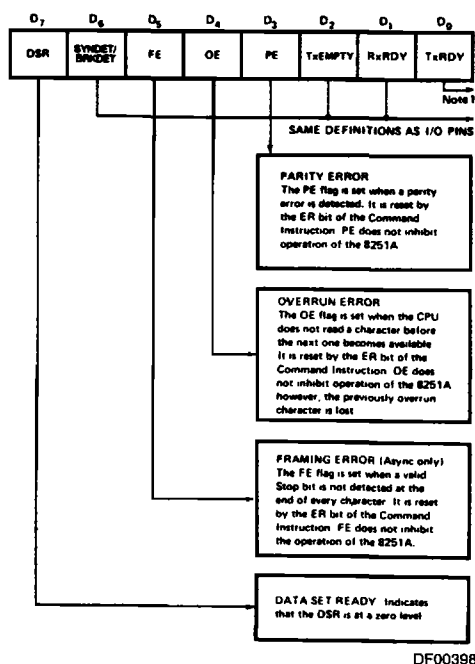

Note 1: TxRDY status bit has different meanings from the TxRDY output pin. The former is not conditioned by CTS and TxEN; the latter is conditioned by both CTS and TxEN. i.e. TxRDY status bit = DB Buffer Empty; TxRDY pin out = DB Buffer Empty · (CTS 0) · (TxEN = 1)

Figure 13. Status Read Format

## APPLICATIONS INFORMATION



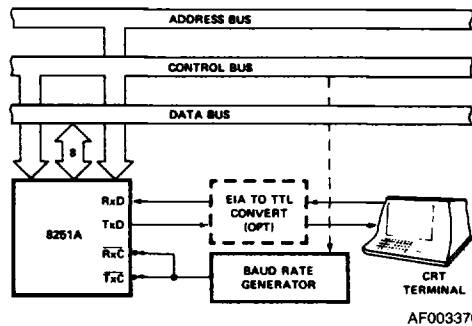


Figure 14. Asynchronous Serial Interface to CRT Terminal, DC - 9600 Baud

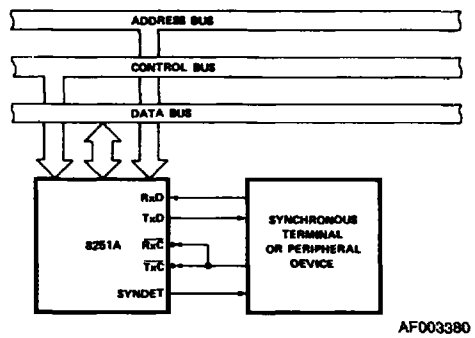


AF003380

Figure 15. Synchronous Interface to Terminal or Peripheral Device

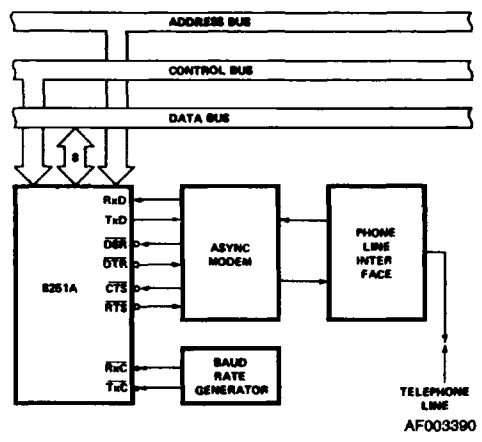

TELEPHONE LINE  
AF003390

Figure 16. Asynchronous Interface to Telephone Lines

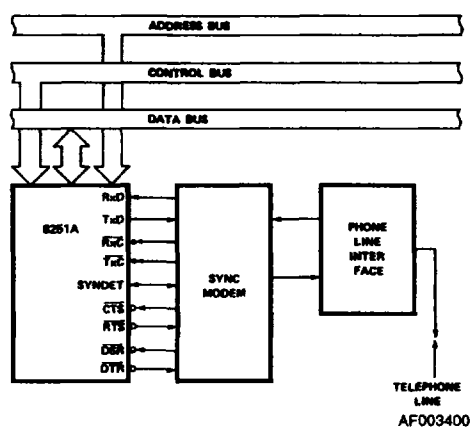

TELEPHONE LINE  
AF003400

Figure 17. Synchronous Interface to Telephone Lines

**ABSOLUTE MAXIMUM RATINGS**

Storage Temperature ..... -65°C to +150°C  
 Voltage on Any Pin  
 with Respect to Ground ..... -0.5 to +7V  
 Power Dissipation ..... 1 Watt

*Stresses above those listed under ABSOLUTE MAXIMUM RATINGS may cause permanent device failure. Functionality at or above these limits is not implied. Exposure to absolute maximum ratings for extended periods may affect device reliability.*

**OPERATING RANGES**

Part Number	T <sub>A</sub>	V <sub>CC</sub>
8251A	0°C to 70°C	5V ±10%


*Operating ranges define those limits over which the functionality of the device is guaranteed.*

**DC CHARACTERISTICS**

Parameters	Description	Test Conditions	Min	Max	Units
V <sub>IL</sub>	Input Low Voltage		-0.5	0.8	V
V <sub>IH</sub>	Input High Voltage		2.0	V <sub>CC</sub>	V
V <sub>OL</sub>	Output Low Voltage	I <sub>OL</sub> = 2.2mA		0.45	V
V <sub>OH</sub>	Output High Voltage	I <sub>OL</sub> = -400µA	2.4		V
I <sub>OFL</sub>	Output Float Leakage	V <sub>OUT</sub> = V <sub>CC</sub> to 0.45V		±10	µA
I <sub>IL</sub>	Input Leakage	V <sub>IN</sub> = V <sub>CC</sub> to 0.45V		±10	µA
I <sub>CC</sub>	Power Supply Current	All Outputs = High		100	mA

**CAPACITANCE** (T<sub>A</sub> = 25°C, V<sub>CC</sub> = GND = 0V)

Parameters	Description	Test Conditions	Min	Max	Units
C <sub>IN</sub>	Input Capacitance	f <sub>c</sub> = 1MHz		10	pF
C <sub>I/O</sub>	I/O Capacitance	Unmeasured Pins Returned to GND		20	pF

**SWITCHING TEST INPUT/OUTPUT WAVEFORM****SWITCHING LOAD CIRCUIT**

A.C. TESTING: INPUTS ARE DRIVEN AT 2.4V FOR A LOGIC "1" AND 0.45V FOR A LOGIC "0." TIMING MEASUREMENTS ARE MADE AT 2.0V FOR A LOGIC "1" and 0.8V FOR A LOGIC "0."

C<sub>L</sub> = 150pF

**SWITCHING CHARACTERISTICS**


Bus Parameters (Note 1)

Parameters	Description	Test Conditions	Min	Max	Units
<b>READ CYCLE</b>					
t <sub>AR</sub>	Address Stable Before READ (CS, C/D)	Note 2	0		ns
t <sub>RA</sub>	Address Hold Time for READ (CS, C/D)	Note 2	0		ns
t <sub>RR</sub>	READ Pulse Width		250		ns
t <sub>RD</sub>	Data Delay from READ	3, C <sub>L</sub> = 150pF		200	ns
t <sub>DF</sub>	READ to Data Floating		10	100	ns
<b>WRITE CYCLE</b>					
t <sub>AW</sub>	Address Stable Before WRITE		0		ns
t <sub>WA</sub>	Address Hold Time for WRITE		0		ns
t <sub>WW</sub>	WRITE Pulse Width		250		ns
t <sub>DW</sub>	Data Setup Time for WRITE		150		ns
t <sub>WD</sub>	Data Hold Time for WRITE		20		ns
t <sub>RV</sub>	Recovery Time Between WRITES	Note 4	6		tcy

**SWITCHING CHARACTERISTICS (Cont.)**

Parameters	Description	Test Conditions	Min	Max	Units
<b>OTHER TIMINGS</b>					
$t_{CY}$	Clock Period	Notes 5, 6	320	1350	ns
$t_0$	Clock High Pulse Width		120	$t_{CY}-90$	ns
$t_0$	Clock Low Pulse Width		90		ns
$t_r$ $t_f$	Clock Rise and Fall Time			20	ns
$t_{DTX}$	TxD Delay from Falling Edge of TxCl			1	$\mu$ s
$t_{Tx}$	Transmitter Input Clock Frequency 1x Baud Rate		DC	64	kHz
	16x Baud Rate		DC	310	kHz
	64x Baud Rate		DC	615	kHz
$t_{TPN}$	Transmitter Input Clock Pulse Width 1x Baud Rate		12		$t_{CY}$
	16x and 64x Baud Rate		1		$t_{CY}$
$t_{TPD}$	Transmitter Input Clock Pulse Delay 1x Baud Rate		15		$t_{CY}$
	16x and 64x Baud Rate		3		$t_{CY}$
$t_{Rx}$	Receiver Input Clock Frequency 1x Baud Rate		DC	64	kHz
	16x Baud Rate		DC	310	kHz
	64x Baud Rate		DC	615	kHz
$t_{RPW}$	Receiver Input Clock Pulse Width 1x Baud Rate		12		$t_{CY}$
	16x and 64x Baud Rate		1		$t_{CY}$
$t_{RPD}$	Receiver Input Clock Pulse Delay 1x Baud Rate		15		$t_{CY}$
	16x and 64x Baud Rate		3		$t_{CY}$
$t_{TxRDY}$	TxRDY Pin Delay from Center of Last Bit	Note 7		14	$t_{CY}$
$t_{TxRDY}$ CLEAR	TxRDY $\downarrow$ from Leading Edge of WR	Note 7		400	ns
$t_{RxRDY}$	RxRDY Pin Delay from Center of Last Bit	Note 7		26	$t_{CY}$
$t_{RxRDY}$ CLEAR	RxRDY $\downarrow$ from Leading Edge of RD	Note 7		400	$t_{CY}$
$t_{IS}$	Internal SYNDET Delay from Rising Edge of RxCl	Note 7		26	$t_{CY}$
$t_{ES}$	External SYNDET Set-up Time After Rising Edge of RxCl	Note 7	18		$t_{CY}$
$t_{TxEMPTY}$	TXEMPTY Delay from Center of Last Bit	Note 7		20	$t_{CY}$
$t_{WC}$	Control Delay from Rising Edge of WRITE (TxEn, DTR, RTS)	Note 7		8	$t_{CY}$
$t_{CR}$	Control to READ Set-up Time (DSR, CTS)	Note 7	20		$t_{CY}$


- Notes: 1. AC timings measured  $V_{OH} = 2.0$ ,  $V_{OL} = 0.8$ , and with load circuit of Figure 1.  
 2. Chip Select ( $\overline{CS}$ ) and Command/Data (C/D) are considered as Addresses.  
 3. Assumes that Address is valid before  $Rp1$ .  
 4. This recovery time is for after a Mode Instruction only. Write Data is allowed only when TxRDY = 1. Recovery time between Writes for Asynchronous Mode is 8  $t_{CY}$  and for Synchronous Mode is 16  $t_{CY}$ .  
 5. The TxCl and RxCl frequencies have the following limitations with respect to CLK: for 1x Baud Rate,  $f_{Tx}$  or  $f_{Rx} \leq 1/(30 t_{CY})$ ; for 16x and 64x Baud Rate,  $f_{Tx}$  or  $f_{Rx} \leq 1/(4.5 t_{CY})$ .  
 6. Reset Pulse Width = 6  $t_{CY}$  minimum; System Clock must be running during Reset.  
 7. Status update can have a maximum delay of 28 clock periods from the event affecting the status.

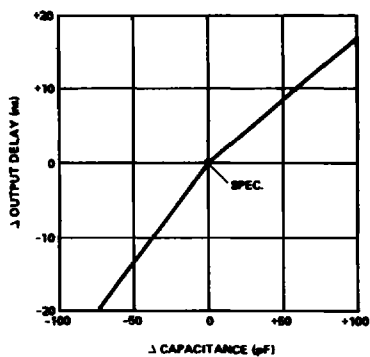TYPICAL  $\Delta$  OUTPUT DELAY VS.  $\Delta$  CAPACITANCE (pF)

OP006180


## SWITCHING WAVEFORMS

## SYSTEM CLOCK INPUT




WF008150

## TRANSMITTER CLOCK AND DATA

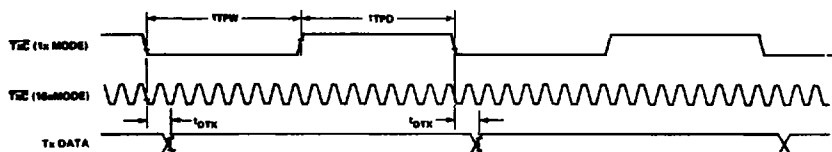

WF006200


## RECEIVER CLOCK AND DATA

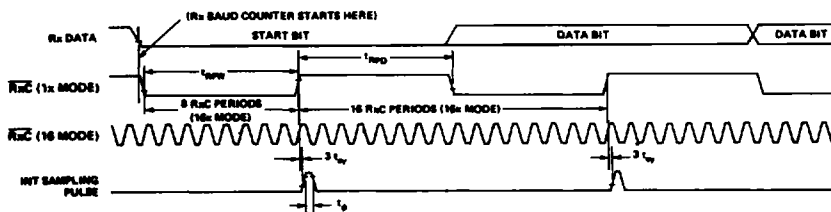


WF008140

## SWITCHING WAVEFORMS (Continued)


## WRITE DATA CYCLE (CPU → USART)

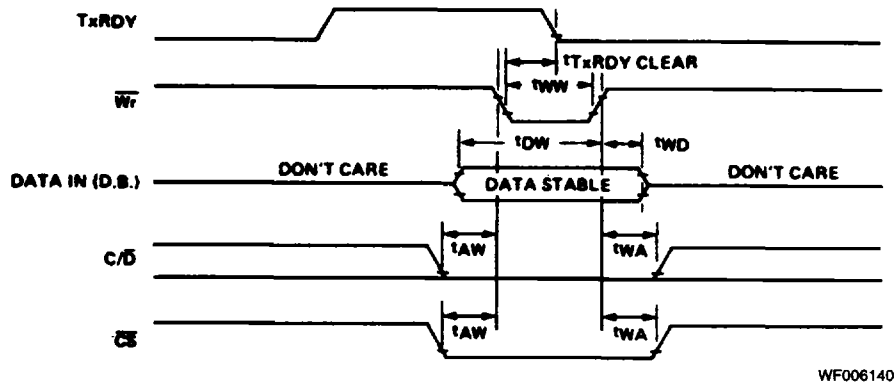

## READ DATA CYCLE CPU ← USART)

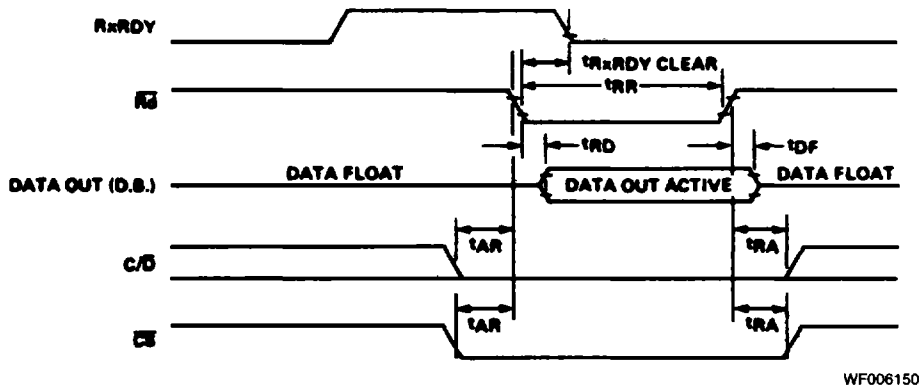


## WRITE CONTROL OR OUTPUT PORT CYCLE (CPU → USART)

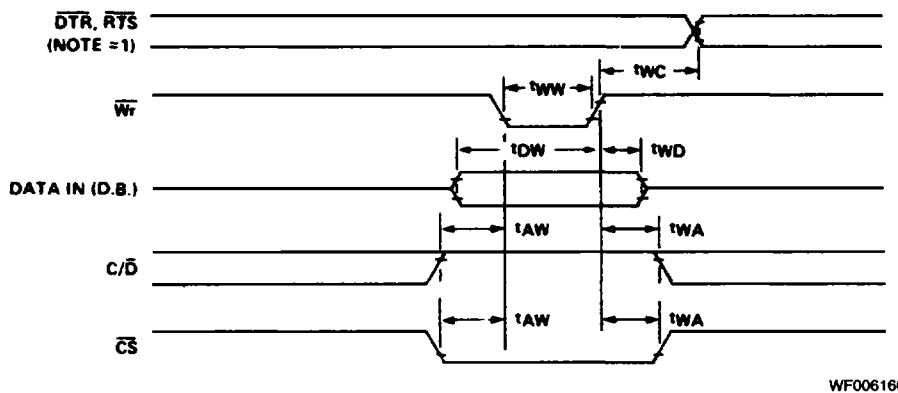

## SWITCHING WAVEFORMS (Continued)


## READ CONTROL OR INPUT PORT (CPU - USART)

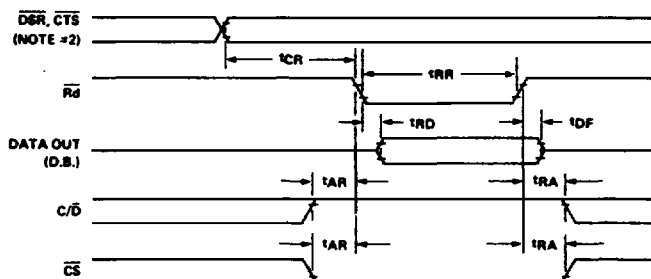

WF006170

- Notes: 1.  $T_{WC}$  INCLUDES THE RESPONSE TIMING OF A CONTROL BYTE.  
 2.  $T_{CR}$  INCLUDES THE EFFECT OF CTS ON THE  $T_xENBL$  CIRCUITY.


## TRANSMITTER CONTROL AND FLAG TIMING (ASYNC MODE)

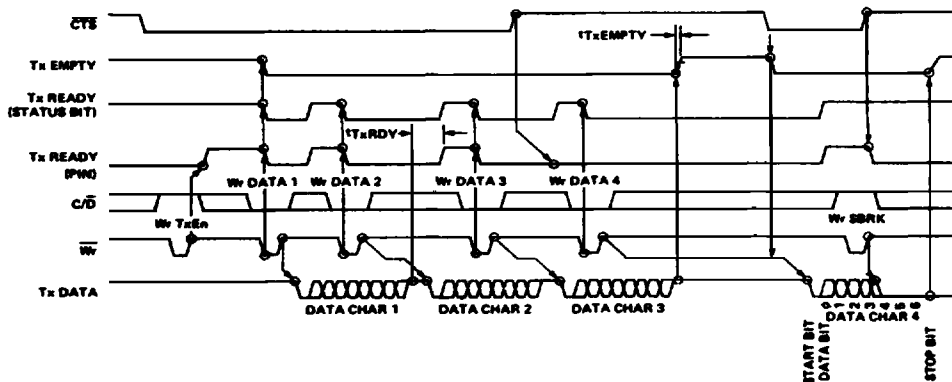

WF006180

EXAMPLE FORMAT = 7 BIT CHARACTER WITH PARITY &amp; 2 STOP BITS.

## RECEIVER CONTROL AND FLAG TIMING (ASYNC MODE)

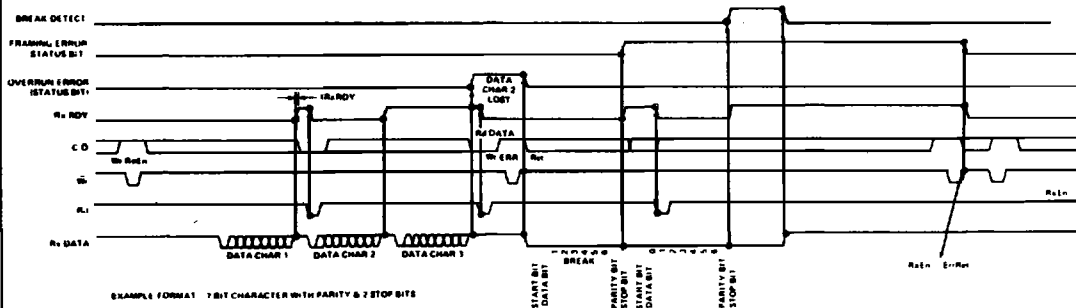

WF006110

EXAMPLE FORMAT = 7 BIT CHARACTER WITH PARITY 2 &amp; STOP BITS.



