

# MB1F-10AT THRU MB10F-10AT

## SURFACE MOUNT GLASS PASSIVATED BRIDGE RECTIFIER


Reverse Voltage : 100V~1000 V    Forward Current: 1.0A

### FEATURES

- ◆ Glass Passivated Chip Junction
- ◆ Reverse Voltage - 100 to 1000 V
- ◆ Forward Current - 1 A
- ◆ High Surge Current Capability
- ◆ Designed for Surface Mount Application

### PINNING

PIN	DESCRIPTION
1	Input Pin ( ~ )
2	Input Pin ( ~ )
3	Output Anode ( + )
4	Output Cathode ( - )

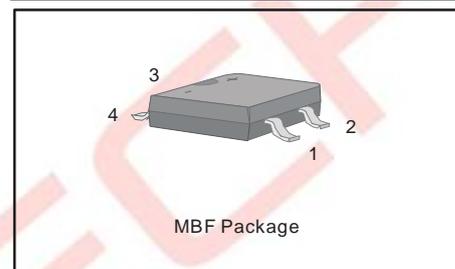

### MECHANICAL DATA

- ◆ Case: MBF
- ◆ Terminals: Solderable per MIL-STD-750, Method 2026
- ◆ Approx. Weight: 75mg 0.0026oz

### Maximum Ratings and Electrical characteristics

Ratings at 25 °C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derate by 20 %.

Parameter	Symbols	MB1F -10AT	MB2F -10AT	MB4F -10AT	MB6F -10AT	MB8F -10AT	MB10F -10AT	Units
Maximum Repetitive Peak Reverse Voltage	$V_{RRM}$	100	200	400	600	800	1000	V
Maximum RMS voltage	$V_{RMS}$	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	100	200	400	600	800	1000	V
Average Rectified Output Current at $T_c = 125^\circ\text{C}$	$I_o$	1.0						A
Peak Forward Surge Current 8.3 ms Single Half Sine Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	35						A
Maximum Forward Voltage at 1.0 A	$V_F$	1.1						V
Maximum DC Reverse Current @ $T_A=25^\circ\text{C}$ at Rated DC Blocking Voltage @ $T_A=125^\circ\text{C}$	$I_R$	5 40						$\mu\text{A}$
Typical Junction Capacitance ( Note1 )	$C_j$	13						pF
Typical Thermal Resistance ( Note2 )	$R_{\theta JA}$ $R_{\theta JC}$	80 25						$^\circ\text{C/W}$
Operating and Storage Temperature Range	$T_j, T_{stg}$	-55 ~ +150						$^\circ\text{C}$


Note: 1. Measured at 1MHz and applied reverse voltage of 4 V D.C.

2. Mounted on glass epoxy PC board with 4×1.5"×1.5" ( 3.81×3.81 cm ) copper pad.


# MB1F-10AT THRU MB10F-10AT

## RATINGS AND CHARACTERISTIC CURVES


**Fig.1 Average Rectified Output Current Derating Curve**

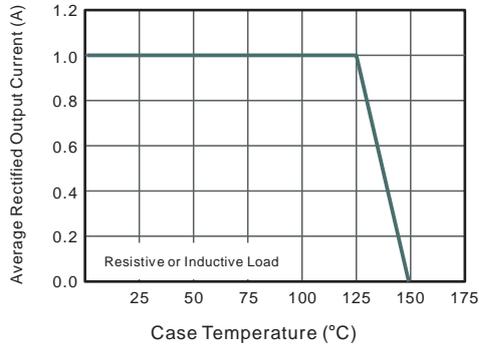


**Fig.2 Typical Reverse Characteristics**

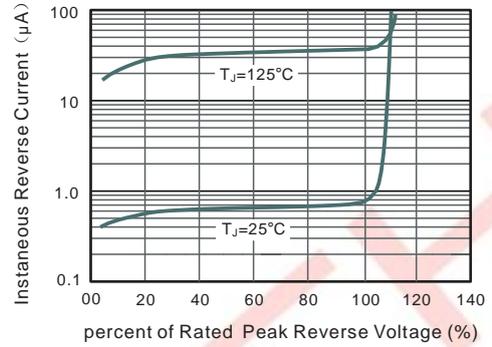


**Fig.3 Typical Instantaneous Forward Characteristics**

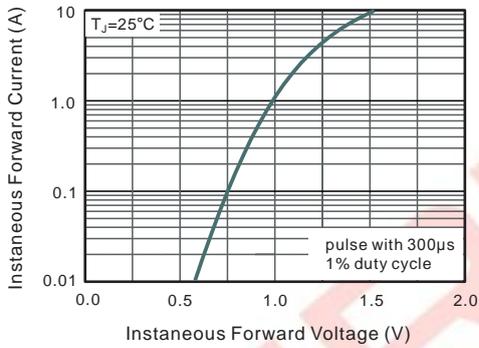

**Fig.4 Typical Junction Capacitance**

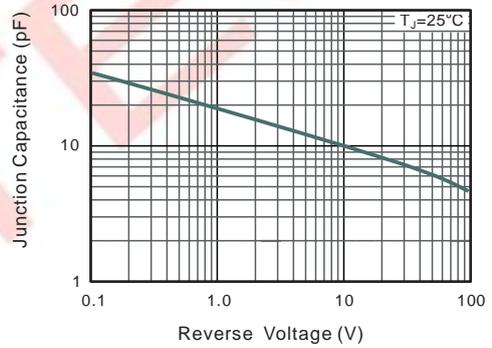


**Fig.5 Maximum Non-Repetitive Peak Forward Surge Current**

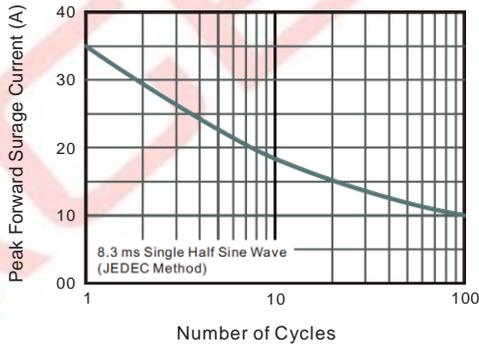


# MB1F-10AT THRU MB10F-10AT

## PACKAGE OUTLINE

MBF

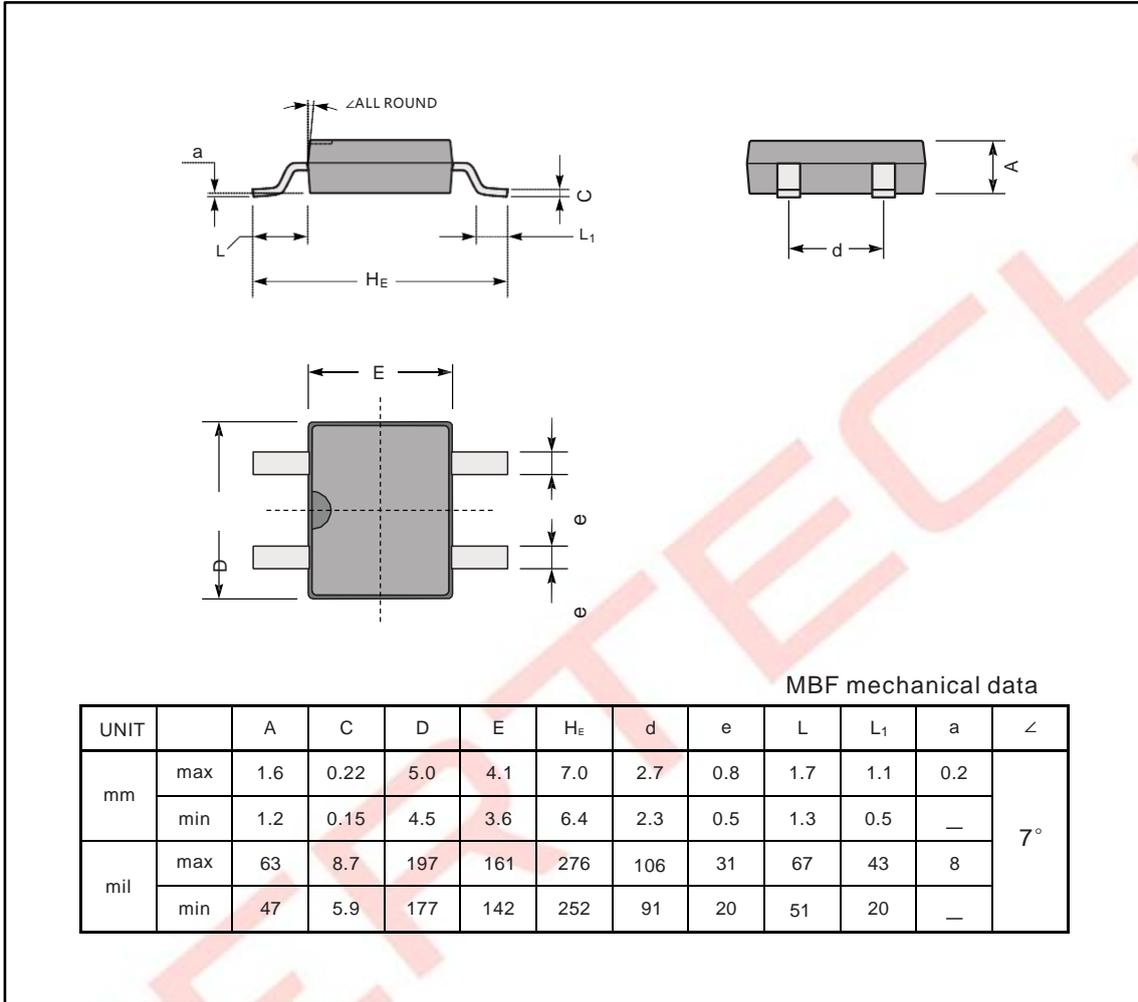

### The recommended mounting pad size

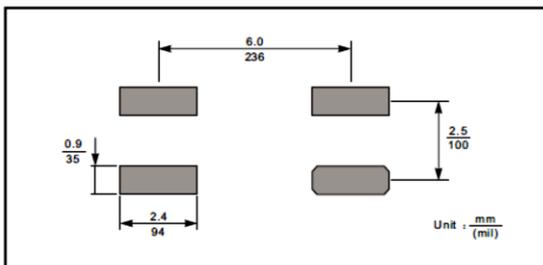

### Marking

Type number	Marking code
MB1F-10AT	10M1
MB2F-10AT	10M2
MB4F-10AT	10M4
MB6F-10AT	10M6
MB8F-10AT	10M8
MB10F-10AT	10M10

