

FR101FL THRU FR107FL

SURFACE MOUNT FAST RECOVERY RECTIFIERS

Forward Current-1A

Reverse Voltage-50V to 1000V

FEATURES


- ◆ For surface mount applications
- ◆ Glass passivated chip junction
- ◆ Low profile package
- ◆ Fast reverse recovery time
- ◆ Lead free in comply with EU RoHS2011/65/EU directives

PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

MECHANICAL DATA

- ◆ Case: SOD-123FL molded plastic body
- ◆ Terminals: Solderable per MIL-STD-750 , Method2026
- ◆ Weight: Approximated 0.015 grams

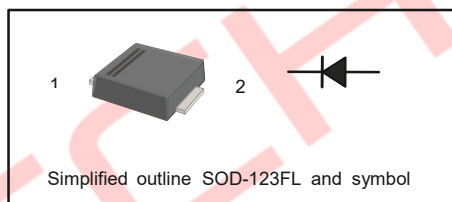

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.

Single phase half-wave 60 Hz, resistive or inductive load, for capacitive load current derating by 20 %.

PARAMETER	SYMBOL	FR101FL	FR102FL	FR103FL	FR104FL	FR105FL	FR106FL	FR107FL	UNIT
Maximum Repetitive Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	1000	V
Maximum Average Forward Rectified Current at T _C =125°C	I _{F(AV)}	1							A
Peak Forward Surge Current (Note1)	I _{FSM}	30							A
Maximum Forward Voltage at 1.0 A	V _F	1.3							V
Maximum DC Reverse Current at Rated DC Blocking Voltage at T _A =25°C T _A =125°C	I _R	5 100							uA
Typical Junction Capacitance at V _R =4V, f=1MHz	C _J	15							pF
Maximum Reverse Recovery Time (Note2)	T _{rr}	150				250	500		nS
Typical Thermal Resistance (Note3)	R _{θJA}	85							°C/W
Operating and Storage Temperature Range	T _J , T _{STG}	-55 to +150							°C

Notes: 1. Measured at 8.3 ms single half sine wave superimposed on rated load (JEDEC Method).

2. Measured with $I_F=0.5A$, $I_R=1A$, $I_{rr}=0.25A$.

3. P.C.B. mounted with 2.0" X 2.0" (5 X 5 cm) copper pad areas.

FR101FL THRU FR107FL

RATINGS AND CHARACTERISTIC CURVES

Fig.1 Forward Current Derating Curve

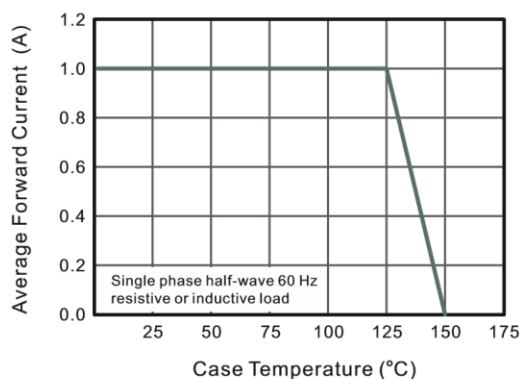


Fig.2 Typical Reverse Characteristics

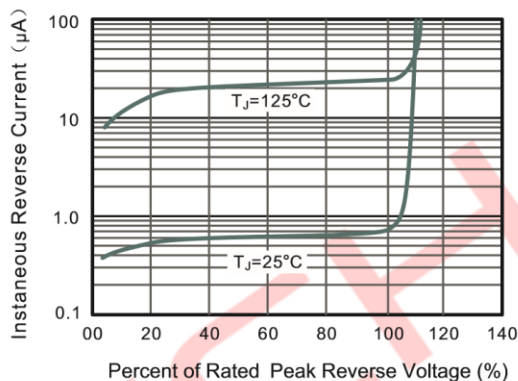


Fig.3 Typical Instantaneous Forward Characteristics

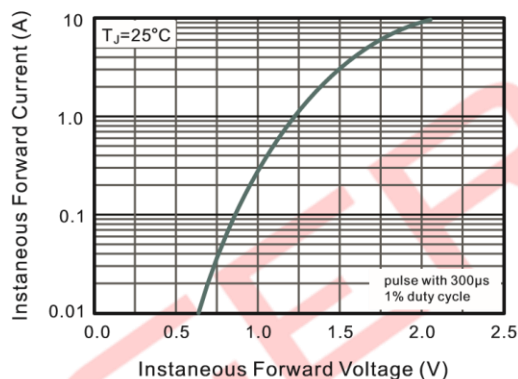


Fig.4 Typical Junction Capacitance


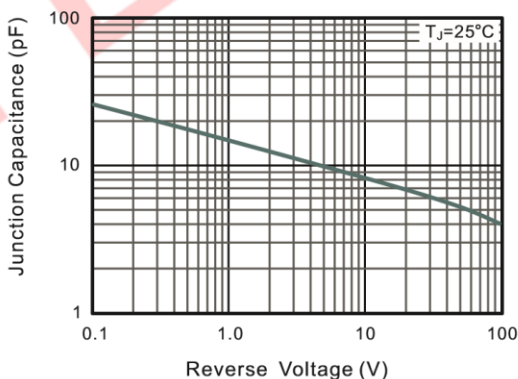



Fig.5 Maximum Non-Repetitive Peak Forward Surge Current

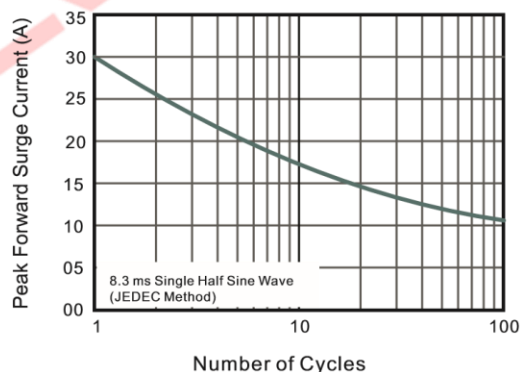

FR101FL THRU FR107FL

PACKAGE OUTLINE

SOD-123FL

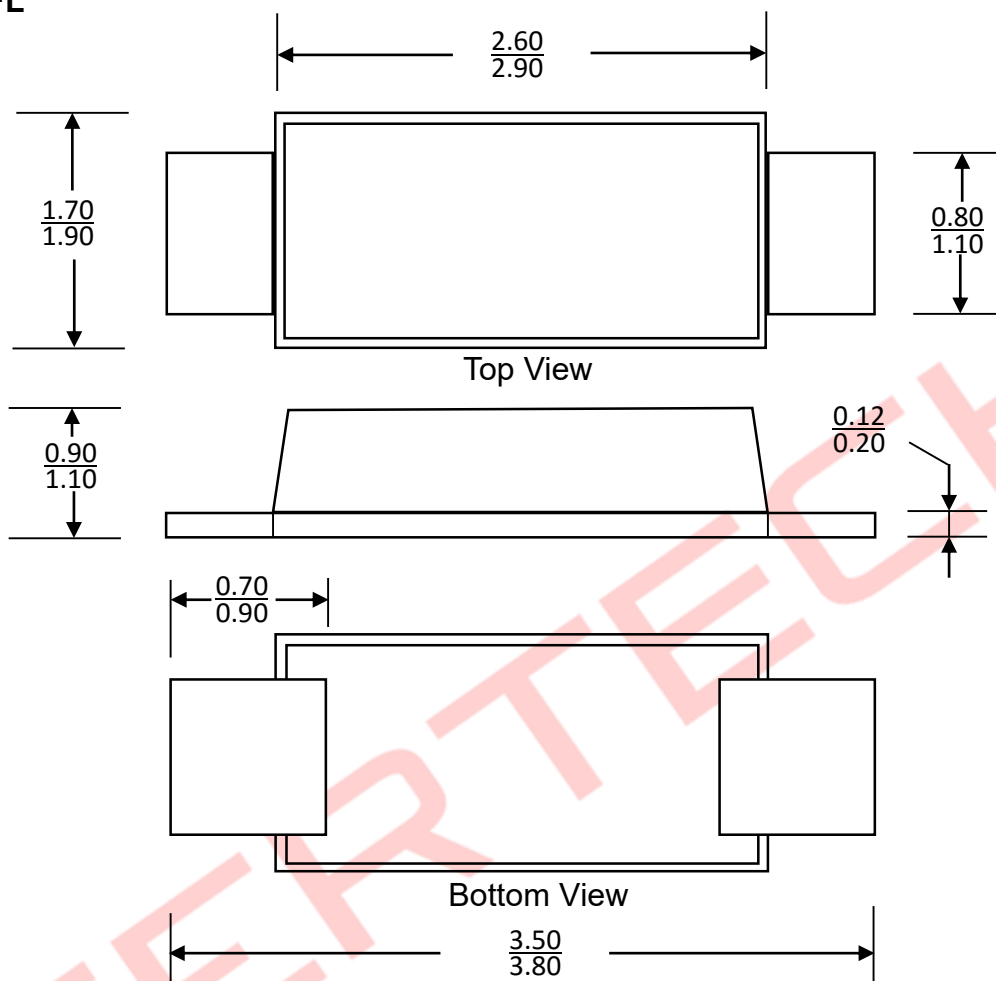

Dimensions in millimeters

ORDERING INFORMATION

Device	Package	Shipping
FR101FL thru FR107FL	SOD-123FL	3,000/Tape & Reel (7 inches)