

DAISY-7X1-W2-D

~50° wide beam with tighter cutoff. Variant with diffused lenses.

SPECIFICATION:

Dimensions	x mm
Height	0 mm
Fastening	pin, screw, clips
ROHS compliant	yes ⓘ


MATERIALS:

Component	Type	Material	Colour	Finish
C17363_DAISY-7X1-W2-D	Linear lens	PMMA	milky	
C18409_DAISY-7X1-SHD-MET-MATT	Shade	PC	metal	matt
C18167_DAISY-7X1-SHD-MET	Shade	PC	metal	gloss
C17225_DAISY-7X1-SHD-WHT-MATT	Shade	PC	white	matt
C17051_DAISY-7X1-SHD-MATT	Shade	PC	black	matt
C16876_DAISY-7X1-SHD-WHT	Shade	PC	white	gloss
C16872_DAISY-7X1-SHD	Shade	PC	black	gloss


ORDERING INFORMATION:

Quantities for one set:

Linear lens	1
Shade	1

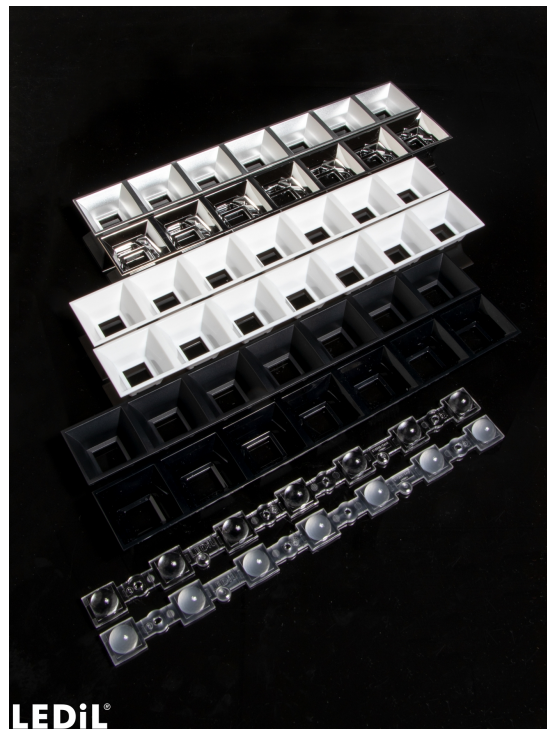

Component		Qty in box	MOQ	MPQ	Box weight (kg)
C17363_DAISY-7X1-W2-D » Box size: 400 x 300 x 300 mm	Linear lens	312	312	24	7.0
C16876_DAISY-7X1-SHD-WHT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.6
C18167_DAISY-7X1-SHD-MET » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.0
C17051_DAISY-7X1-SHD-MATT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.3
C18409_DAISY-7X1-SHD-MET-MATT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.0
C17225_DAISY-7X1-SHD-WHT-MATT » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.6
C16872_DAISY-7X1-SHD » Box size: 595 x 360 x 230 mm	Shade	156	312	24	7.1


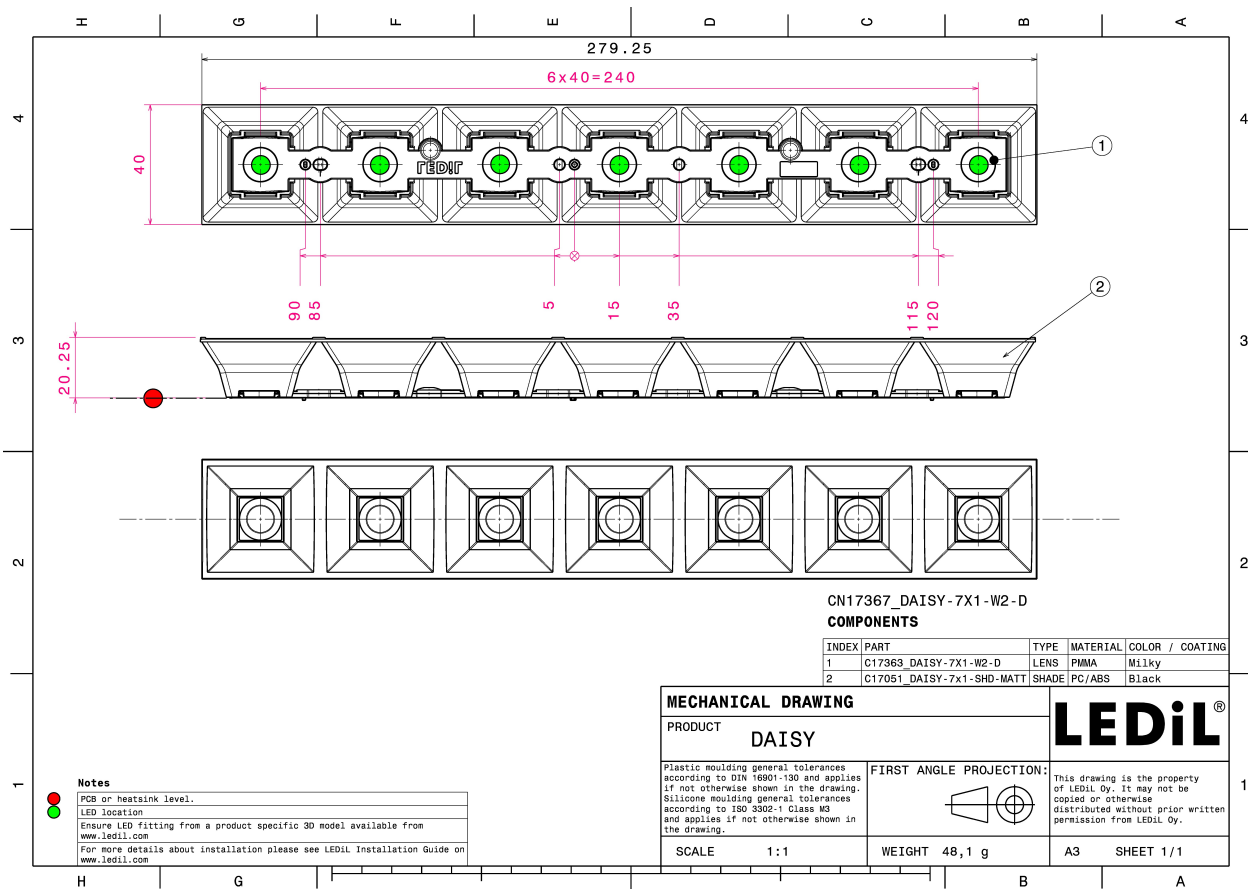


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):





LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 59.0° / 94.0°
 Efficiency 86 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17533_DAISY-7X1-SHD-MET-MATT

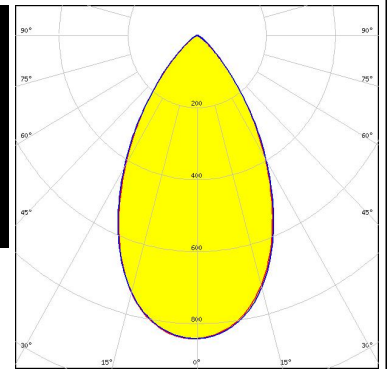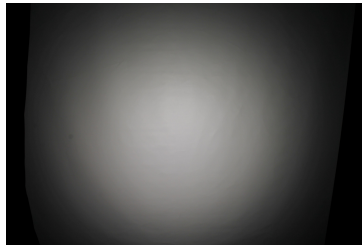


LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 58.0° / 91.0°
 Efficiency 75 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17051_DAISY-7X1-SHD-MATT

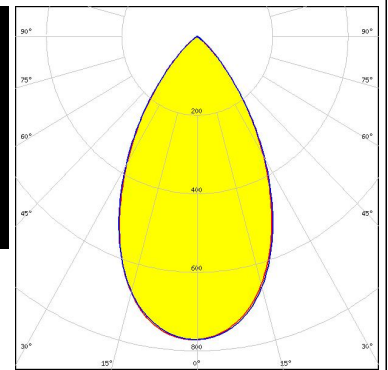

LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 60.0° / 95.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17225_DAISY-7X1-SHD-WHT-MATT

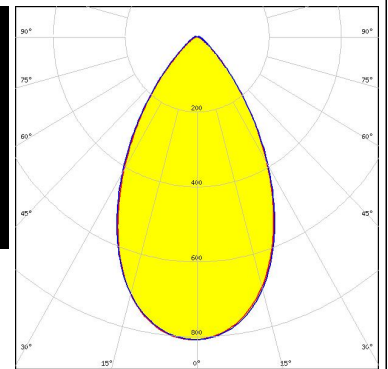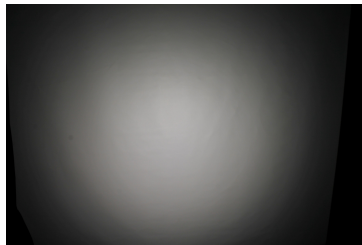



LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 58.5° / 91.0°
 Efficiency 76 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16872_DAISY-7X1-SHD

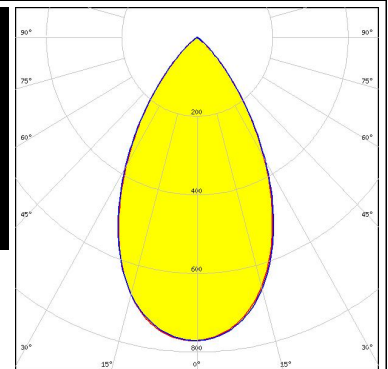



OPTICAL RESULTS (MEASURED):




LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 59.0° / 94.0°
 Efficiency 88 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C18167_DAISY-7X1-SHD-MET

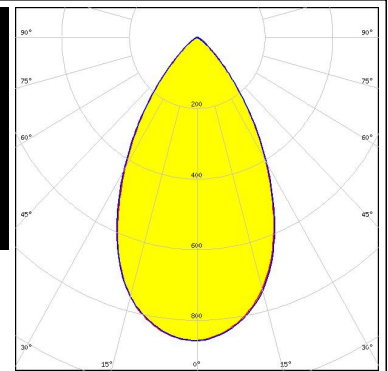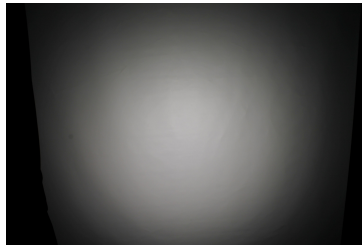



LED LIGHT ENGINE DAISY 28 LEDs 277.5mm x 20mm
 FWHM / FWTM 60.0° / 95.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16876_DAISY-7X1-SHD-WHT

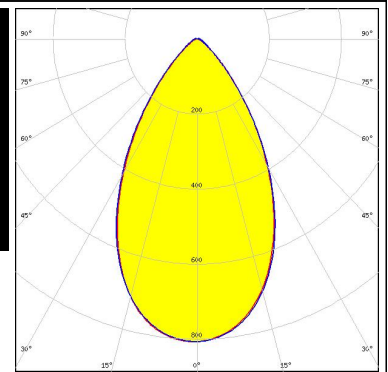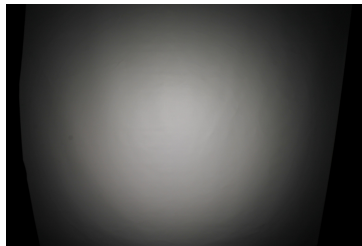

LED LUXEON 2835 Line
 FWHM / FWTM 59.0° / 94.0°
 Efficiency 88 %
 Peak intensity 0.9 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17532_DAISY-7X1-SHD-MET

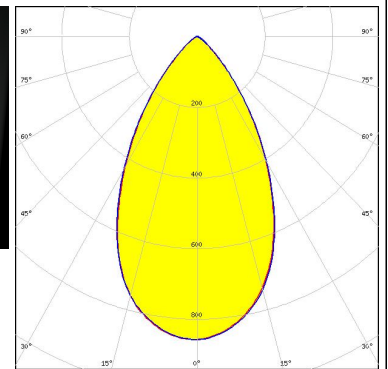



LED LUXEON 2835 Line
 FWHM / FWTM 60.0° / 96.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16876_DAISY-7X1-SHD-WHT

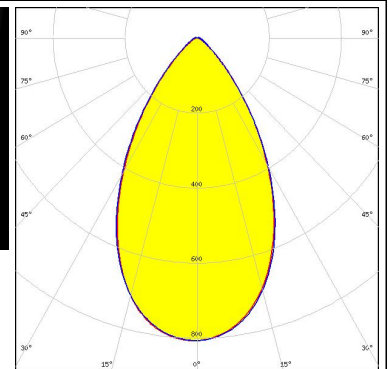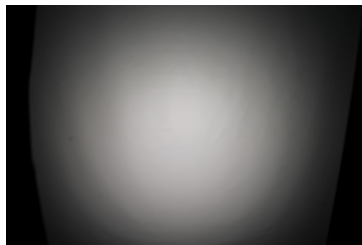



OPTICAL RESULTS (MEASURED):





LED LUXEON 2835 Line
FWHM / FWTM 59.0° / 94.0°
Efficiency 86 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17533_DAISSY-7X1-SHD-MET-MATT

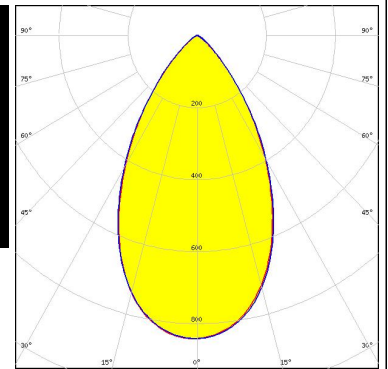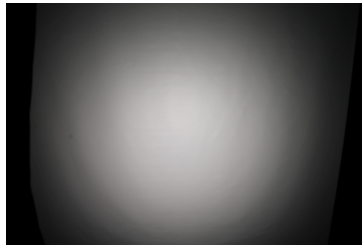


LED LUXEON 2835 Line
FWHM / FWTM 58.0° / 91.0°
Efficiency 75 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISSY-7X1-SHD-MATT

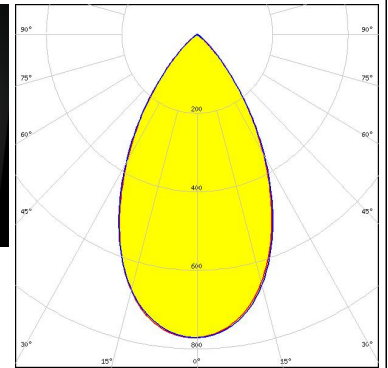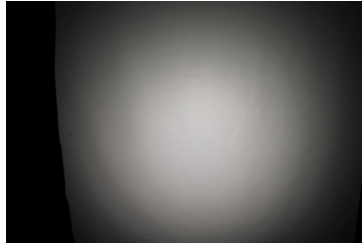

LED LUXEON 2835 Line
FWHM / FWTM 60.0° / 96.0°
Efficiency 88 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISSY-7X1-SHD-WHT-MATT

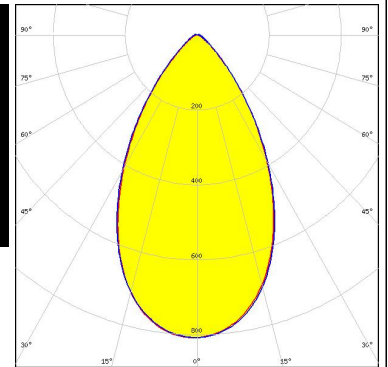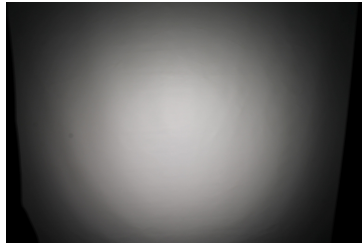

LED LUXEON 2835 Line
FWHM / FWTM 58.5° / 91.0°
Efficiency 76 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISSY-7X1-SHD


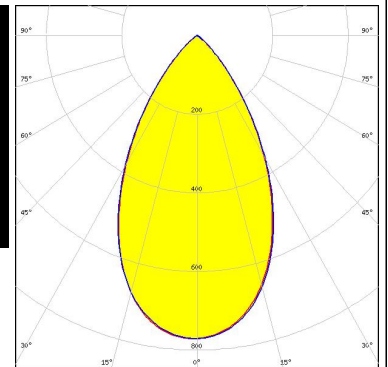


OPTICAL RESULTS (MEASURED):

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 60.0° / 94.0°
Efficiency 87 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C18167_DAISSY-7X1-SHD-MET

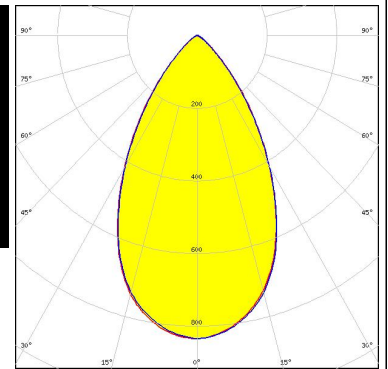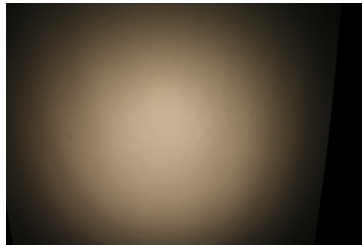

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 61.0° / 97.0°
Efficiency 87 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16876_DAISSY-7X1-SHD-WHT

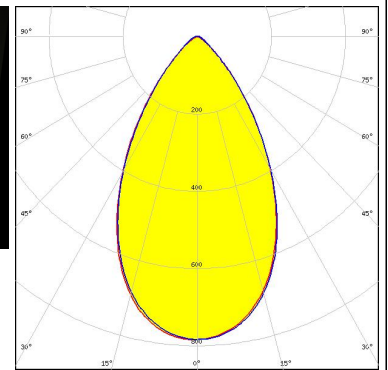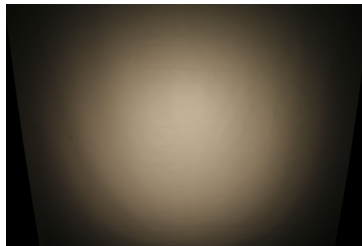

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 59.0° / 95.0°
Efficiency 85 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17533_DAISSY-7X1-SHD-MET-MATT

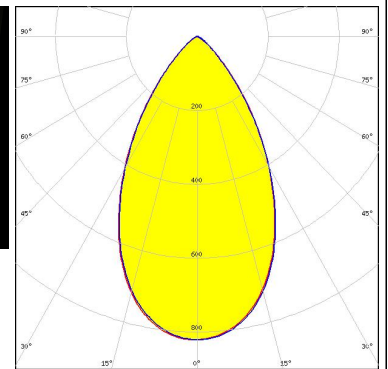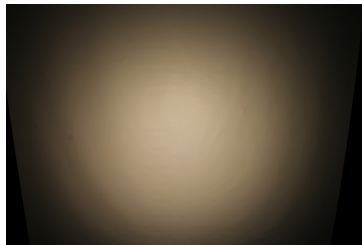

MST

Your solutions

LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
FWHM / FWTM 59.0° / 92.0°
Efficiency 73 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISSY-7X1-SHD-MATT

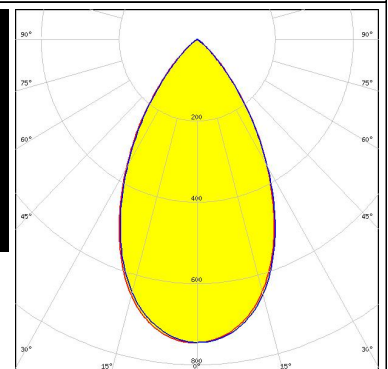
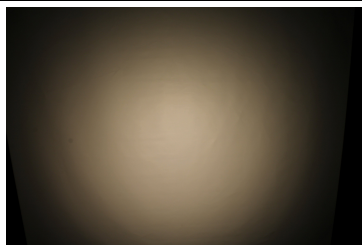


OPTICAL RESULTS (MEASURED):

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 60.0° / 97.0°
 Efficiency 86 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17225_DAISY-7X1-SHD-WHT-MATT

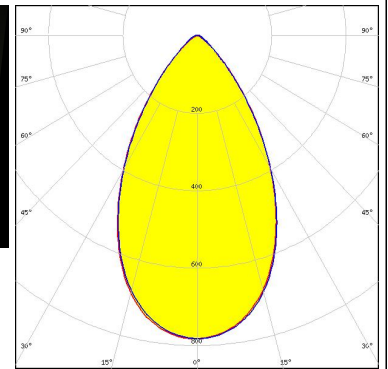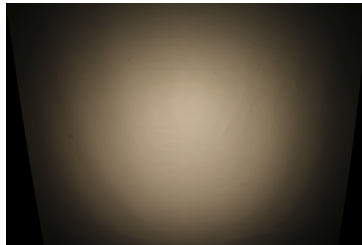

MST

Your solutions



LED LinLED 280x28mm 1100lm 8x0 2C 42V Opt G1
 FWHM / FWTM 59.0° / 92.0°
 Efficiency 74 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16872_DAISY-7X1-SHD

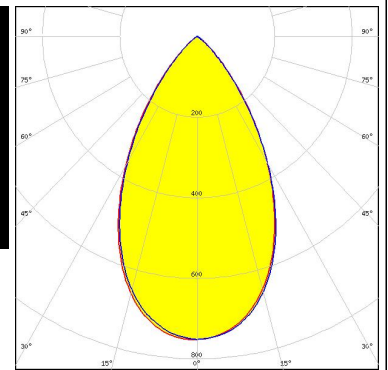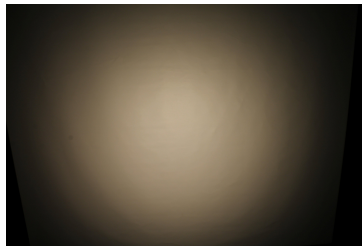

MST



Your solutions

LED LinLED 280x28mm 1600lm 840 4C 21V DAISY 7x1(ZT25)
 FWHM / FWTM 51.0° / 81.0°
 Efficiency 81 %
 Peak intensity 1.1 cd/lm
 LEDs/each optic 1
 Light colour White
 Required components:
 C16872_DAISY-7X1-SHD

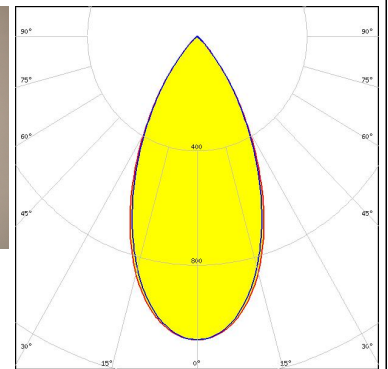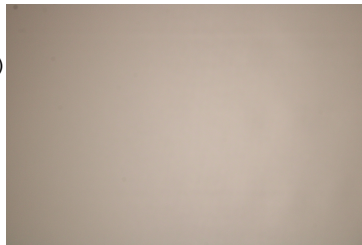

OSRAM

LED PL-LIN-2000 280x24mm
 FWHM / FWTM 59.0° / 91.0°
 Efficiency 74 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17051_DAISY-7X1-SHD-MATT

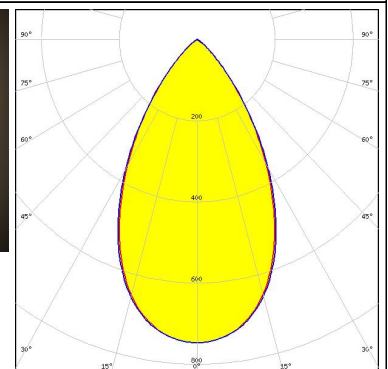
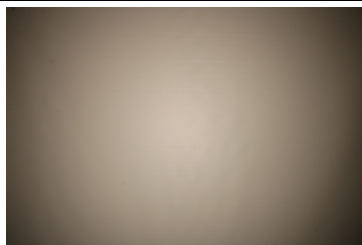


OPTICAL RESULTS (MEASURED):

OSRAM

Opto Semiconductors



LED OSCONIQ E 2835
FWHM / FWTM 58.0° / 91.0°
Efficiency 75 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

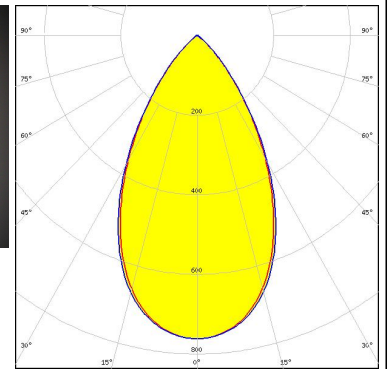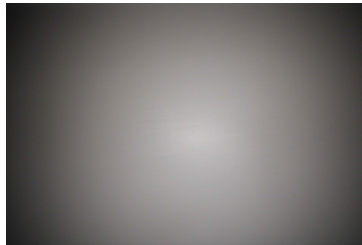

SEITEC

Elektronik GmbH



LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)
FWHM / FWTM 59.0° / 95.0°
Efficiency 89 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

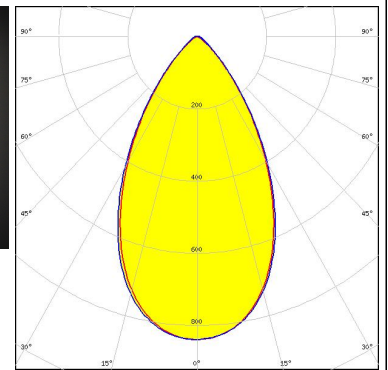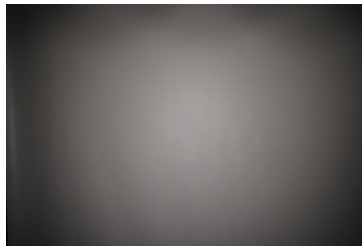

SEITEC

Elektronik GmbH



LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)
FWHM / FWTM 58.0° / 90.0°
Efficiency 77 %
Peak intensity 0.8 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISY-7X1-SHD

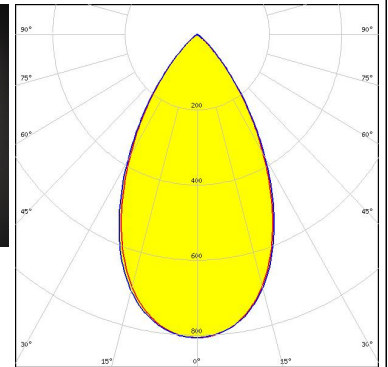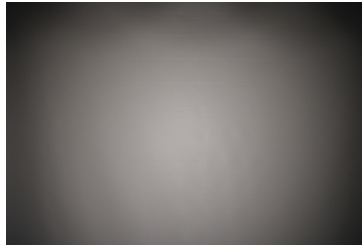

SEITEC

Elektronik GmbH

LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)
FWHM / FWTM 58.0° / 92.0°
Efficiency 89 %
Peak intensity 0.9 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C18167_DAISY-7X1-SHD-MET

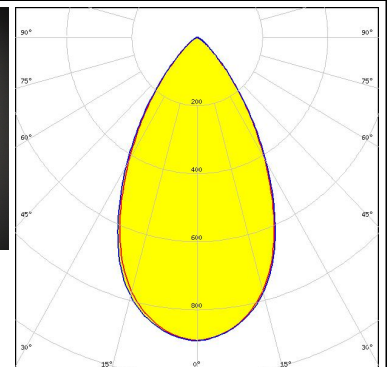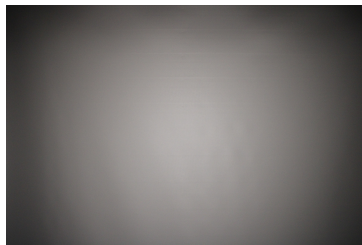



OPTICAL RESULTS (MEASURED):

<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 59.0° / 94.0°</p> <p>Efficiency 89 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C16876_DAISY-7X1-SHD-WHT</p>		
<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 58.0° / 93.0°</p> <p>Efficiency 88 %</p> <p>Peak intensity 0.9 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C17533_DAISY-7X1-SHD-MET-MATT</p>		
<p>SEITEC Elektronik GmbH</p> <p>LED LED-St-L28W2c4-xxx-C015-55 (DAISY-7x1)</p> <p>FWHM / FWTM 58.0° / 90.0°</p> <p>Efficiency 76 %</p> <p>Peak intensity 0.8 cd/lm</p> <p>LEDs/each optic 4</p> <p>Light colour White</p> <p>Required components: C17051_DAISY-7X1-SHD-MATT</p>		
<p>TEPCOMP group</p> <p>LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC</p> <p>FWHM / FWTM 64.0° / 96.0°</p> <p>Efficiency 69 %</p> <p>Peak intensity 0.6 cd/lm</p> <p>LEDs/each optic 1</p> <p>Light colour White</p> <p>Required components: C17051_DAISY-7X1-SHD-MATT</p>		


OPTICAL RESULTS (MEASURED):





LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC
FWHM / FWTM 66.0° / 103.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16876_DAISY-7X1-SHD-WHT

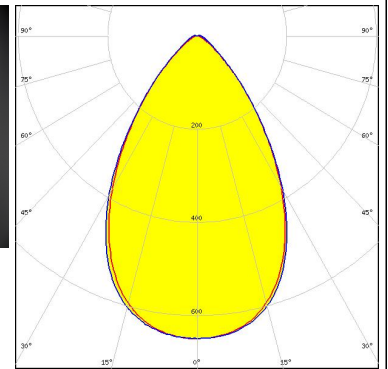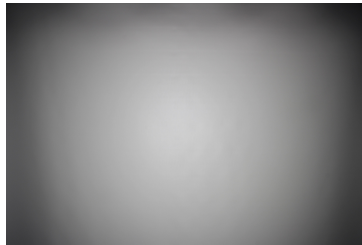


LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC
FWHM / FWTM 66.0° / 103.0°
Efficiency 86 %
Peak intensity 0.7 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

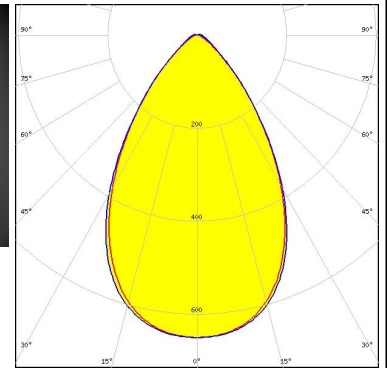

LED PassivePAQ-L-1F35-SSA3-2.7K-840-3-DC
FWHM / FWTM 64.0° / 96.0°
Efficiency 70 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16872_DAISY-7X1-SHD

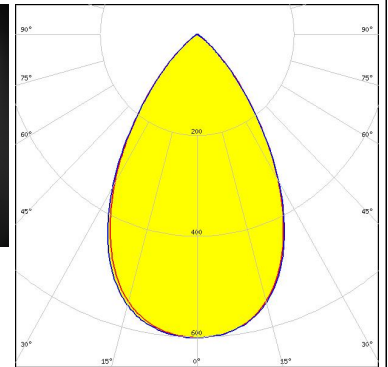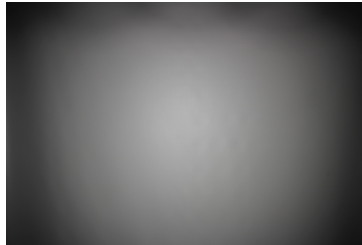



LED LLE 24x280mm 750lm 8x0 LVD ADV1
FWHM / FWTM 60.0° / 92.0°
Efficiency 75 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISY-7X1-SHD

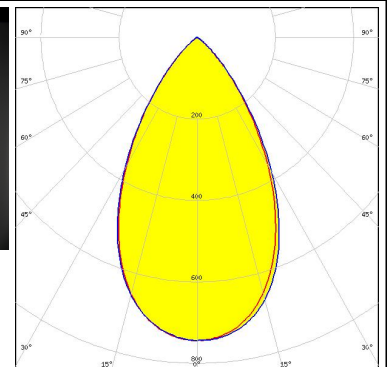

OPTICAL RESULTS (MEASURED):



TRIDONIC

LED LLE 24x280mm 750lm 8x0 LVD ADV1
 FWHM / FWTM 60.0° / 92.0°
 Efficiency 74 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17051_DAISSY-7X1-SHD-MATT

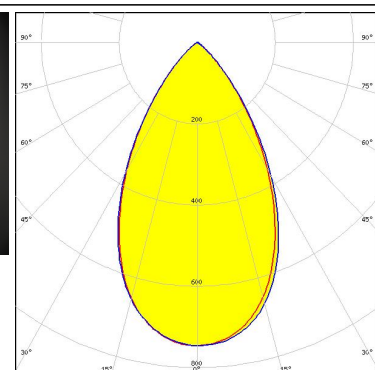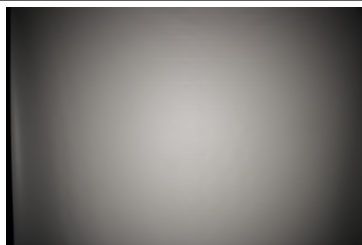

TRIDONIC


LED LLE 24x280mm 750lm 8x0 LVD ADV1
 FWHM / FWTM 61.0° / 96.0°
 Efficiency 88 %
 Peak intensity 0.8 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16876_DAISSY-7X1-SHD-WHT

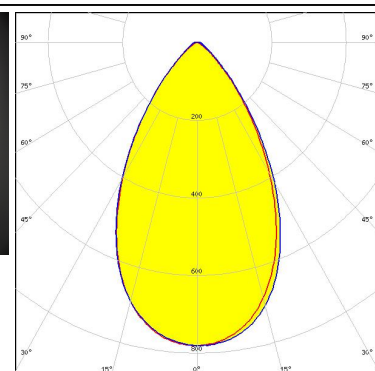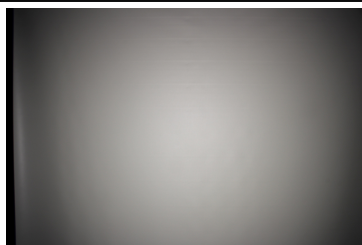


OPTICAL RESULTS (SIMULATED):




LED J Series 2835
FWHM / FWTM 56.0° / 88.0°
Efficiency 77 %
Peak intensity 0.9 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISY-7X1-SHD

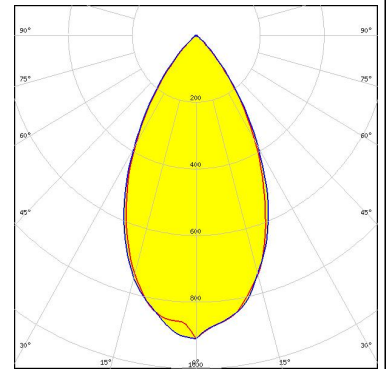


LED Duris E 2835
FWHM / FWTM 58.0° / 92.0°
Efficiency 87 %
Peak intensity 0.9 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

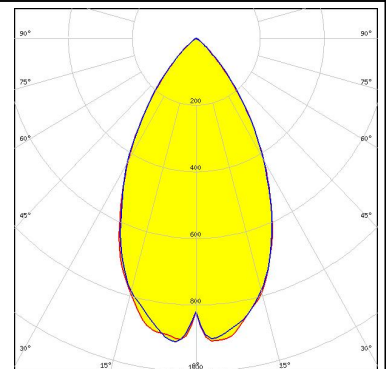

LED Duris E 2835
FWHM / FWTM 58.0° / 91.0°
Efficiency 83 %
Peak intensity 0.9 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISY-7X1-SHD-MATT

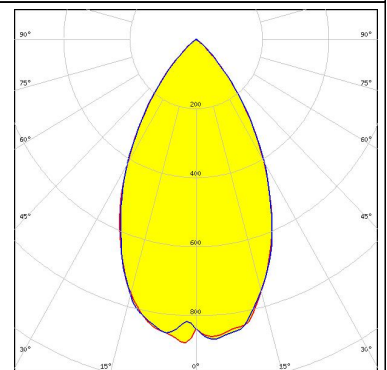


LED OSLO PURE 1010
FWHM / FWTM 44.0° / 70.0°
Efficiency 86 %
Peak intensity 1.5 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISY-7X1-SHD-WHT-MATT

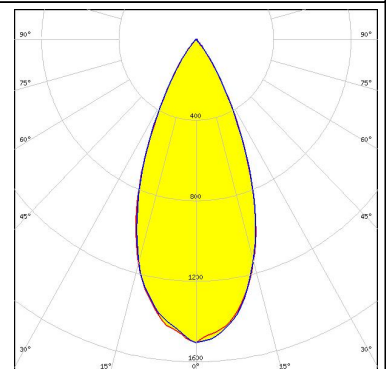

OPTICAL RESULTS (SIMULATED):


SAMSUNG

LED LM301Z Plus
FWHM / FWTM 54.0° / 86.0°
Efficiency 75 %
Peak intensity 0.9 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17051_DAISSY-7X1-SHD-MATT

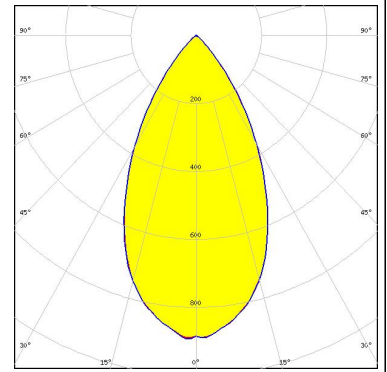


SAMSUNG

LED LM301Z Plus
FWHM / FWTM 55.0° / 86.0°
Efficiency 86 %
Peak intensity 1 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17225_DAISSY-7X1-SHD-WHT-MATT

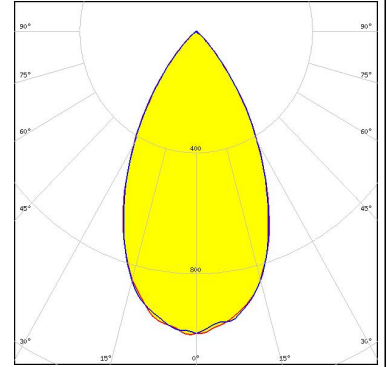


SAMSUNG

LED LM301Z Plus
FWHM / FWTM 56.0° / 86.0°
Efficiency 88 %
Peak intensity 1 cd/lm
LEDs/each optic 3
Light colour White
Required components:
C18167_DAISSY-7X1-SHD-MET

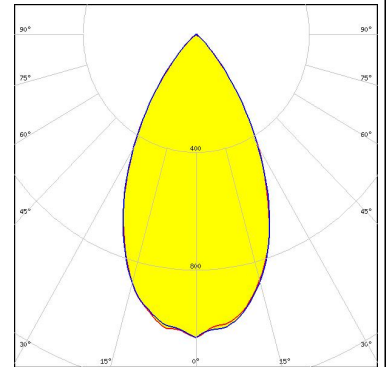

SEOUL SEMICONDUCTOR


LED SEOUL DC 3030C
FWHM / FWTM 56.0° / 88.0°
Efficiency 78 %
Peak intensity 0.9 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16872_DAISSY-7X1-SHD

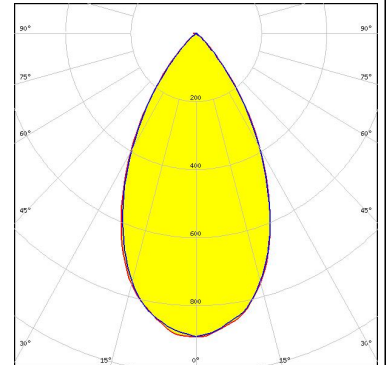

OPTICAL RESULTS (SIMULATED):

TRIDONIC

LED	LLE 24x280mm 750lm 8x0 LVD ADV1
FWHM / FWTM	56.0° / 88.0°
Efficiency	88 %
Peak intensity	1 cd/lm
LEDs/each optic	4
Light colour	White
Required components:	
	C17533_DAISY-7X1-SHD-MET-MATT

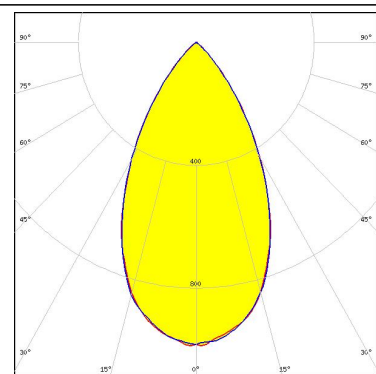

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)