

DAISY-4X1-WW-D

~80° wide beam. Variant with diffused lenses.

SPECIFICATION:

Dimensions	182.0 x 40.0 mm
Height	20.2 mm
Fastening	pin, screw, clips
ROHS compliant	yes ⓘ

MATERIALS:

Component	Type	Material	Colour	Finish
C16993_DAISY-4X1-WW-D	Linear lens	PMMA	milky	
C19075_DAISY-4X1-SHD2	Shade	PC	black	gloss
C18414_DAISY-4X1-SHD-MET-MATT	Shade	PC	metal	matt
C18412_DAISY-4X1-SHD2-MET	Shade	PC	metal	gloss
C18411_DAISY-4X1-SHD2-MET-MATT	Shade	PC	metal	matt
C18407_DAISY-4X1-SHD-MET	Shade	PC	metal	gloss
C17423_DAISY-4X1-SHD2-WHT-MATT	Shade	PC	white	matt
C17422_DAISY-4X1-SHD2-MATT	Shade	PC	black	matt
C16784_DAISY-4X1-SHD-WHT	Shade	PC	white	gloss
C16590_DAISY-4X1-SHD	Shade	PC	black	gloss



ORDERING INFORMATION:



Quantities for one set:

Linear lens	1
Shade	1



Component		Qty in box	MOQ	MPQ	Box weight (kg)
C16993_DAISY-4X1-WW-D » Box size: 480 x 280 x 300 mm	Linear lens	504	336	21	5.6
C16784_DAISY-4X1-SHD-WHT » Box size: 480 x 280 x 300 mm	Shade	168	336	42	5.2
C18407_DAISY-4X1-SHD-MET » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.3
C19075_DAISY-4X1-SHD2 » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.4
C18411_DAISY-4X1-SHD2-MET-MATT » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.7
C17422_DAISY-4X1-SHD2-MATT » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.7
C18412_DAISY-4X1-SHD2-MET » Box size: 480 x 280 x 300 mm	Shade	168	336	42	
C16590_DAISY-4X1-SHD » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.9
C17423_DAISY-4X1-SHD2-WHT-MATT » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.9
C18414_DAISY-4X1-SHD-MET-MATT » Box size: 480 x 280 x 300 mm	Shade	168	336	42	4.3

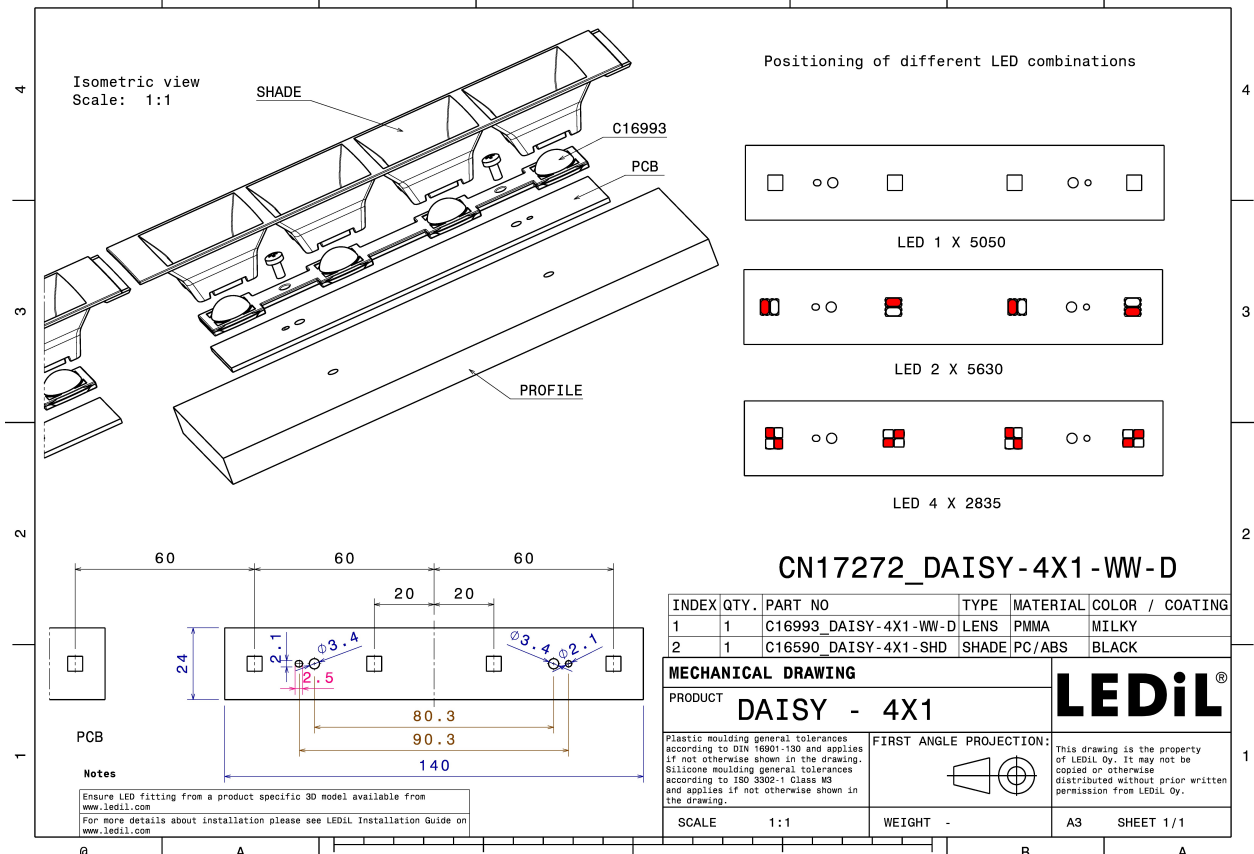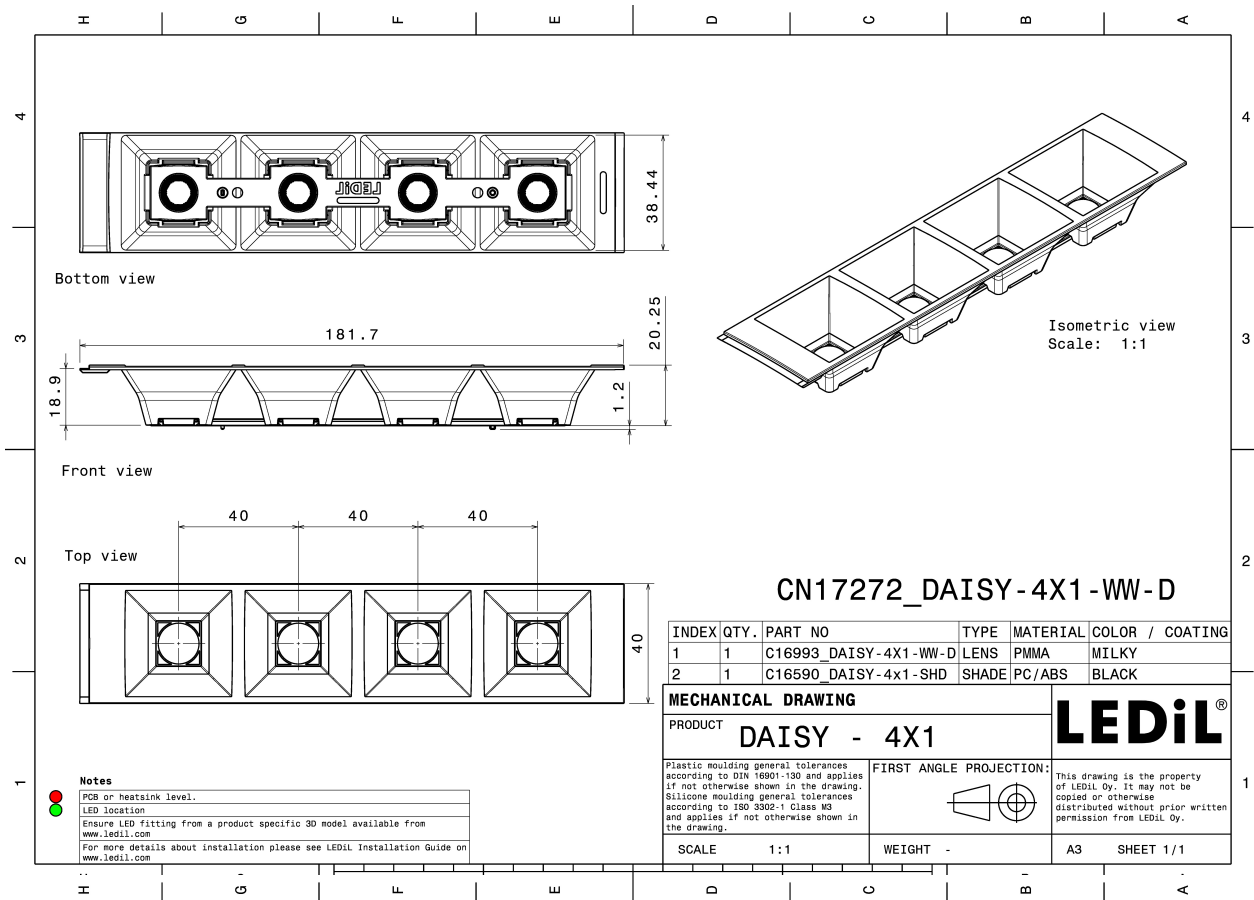

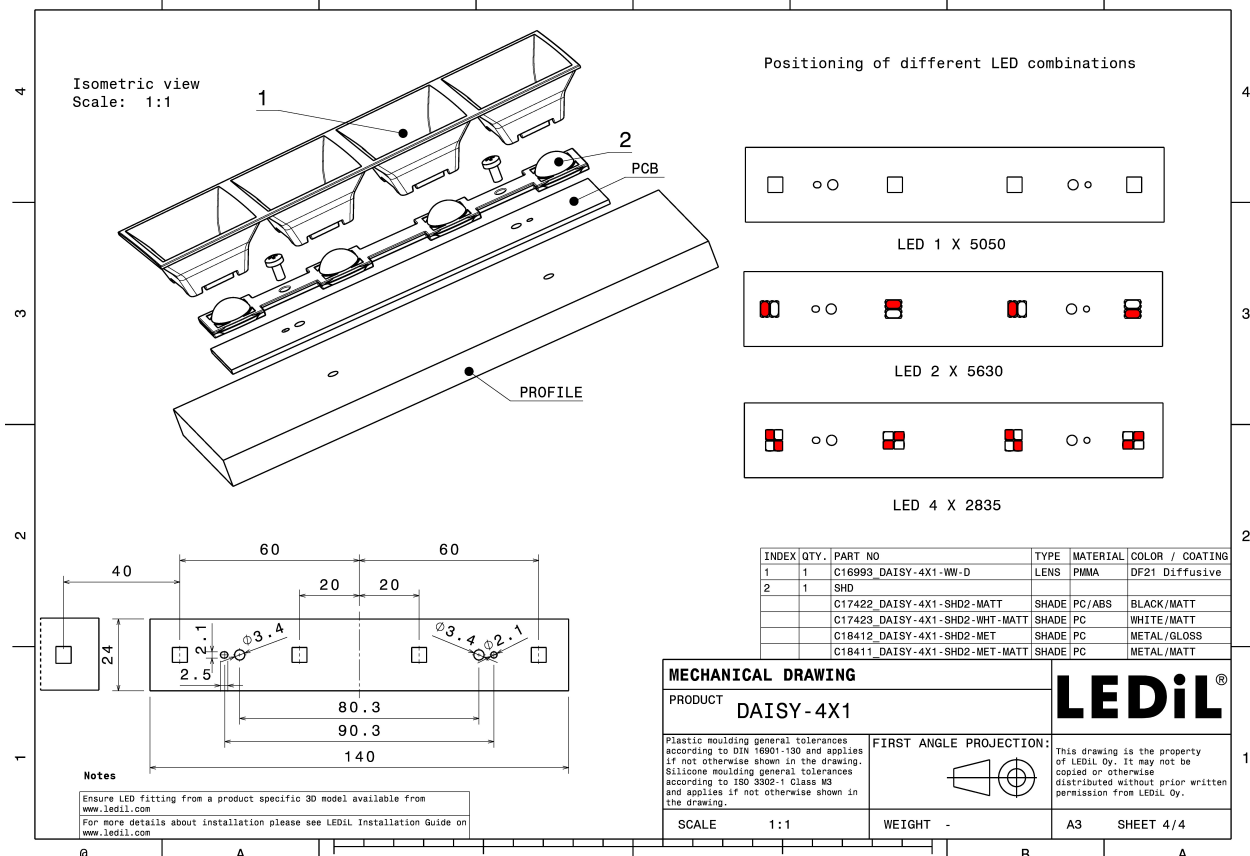
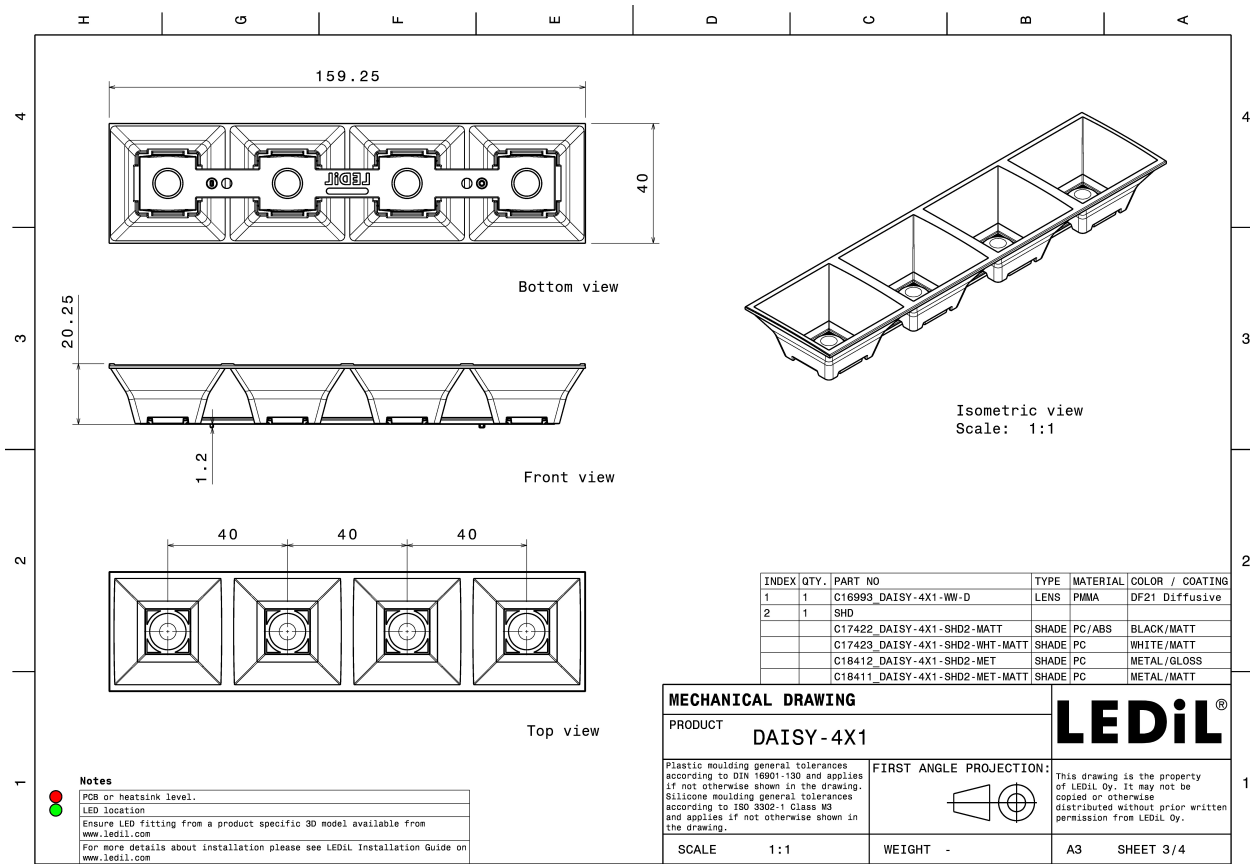


See also our general installation guide: www.ledil.com/installation_guide


OPTICAL RESULTS (MEASURED):





LED LIGHT ENGINE DAISY 16 LEDs 156mm x 20mm
FWHM / FWTM 75.5° / 96.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16784_DAISY-4X1-SHD-WHT

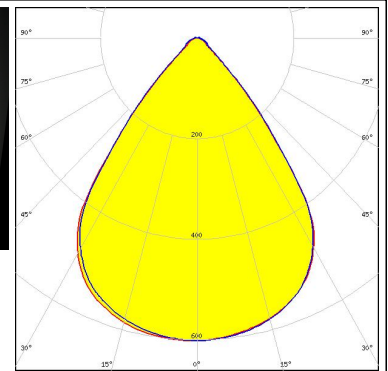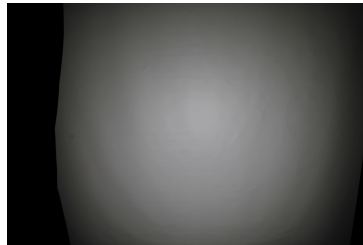



LED LIGHT ENGINE DAISY 16 LEDs 156mm x 20mm
FWHM / FWTM 74.0° / 94.0°
Efficiency 91 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17535_DAISY-4X1-SHD2-MET-MATT

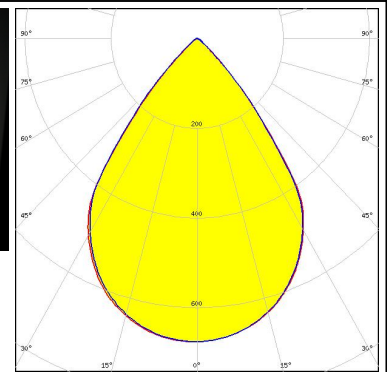

LED LIGHT ENGINE DAISY 16 LEDs 156mm x 20mm
FWHM / FWTM 74.5° / 92.0°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17422_DAISY-4X1-SHD2-MATT

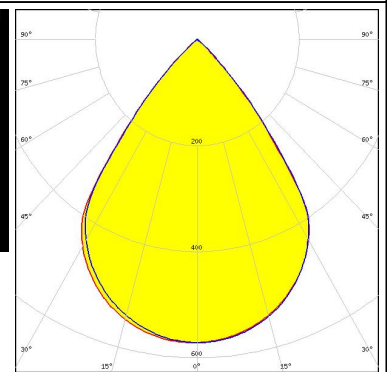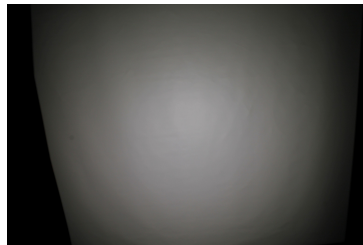



LED LIGHT ENGINE DAISY 16 LEDs 156mm x 20mm
FWHM / FWTM 75.5° / 96.0°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17423_DAISY-4X1-SHD2-WHT-MATT

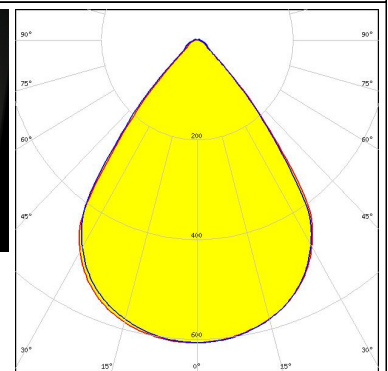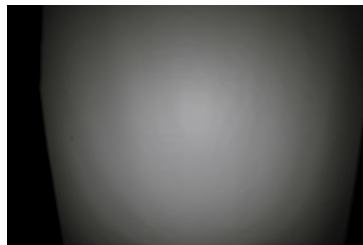



OPTICAL RESULTS (MEASURED):





LED LIGHT ENGINE DAISY 16 LEDs 156mm x 20mm
 FWHM / FWTM 75.0° / 93.0°
 Efficiency 79 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C16590_DAISY-4X1-SHD

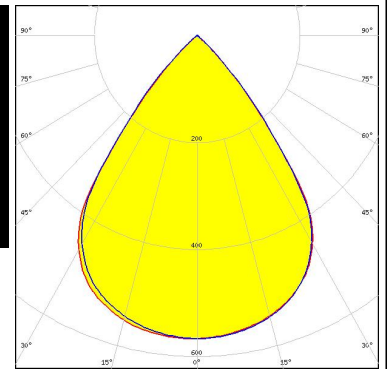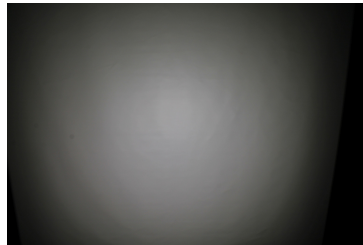



LED LIGHT ENGINE DAISY 16 LEDs 156mm x 20mm
 FWHM / FWTM 73.5° / 93.0°
 Efficiency 94 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour White
 Required components:
 C17528_DAISY-4X1-SHD-MET

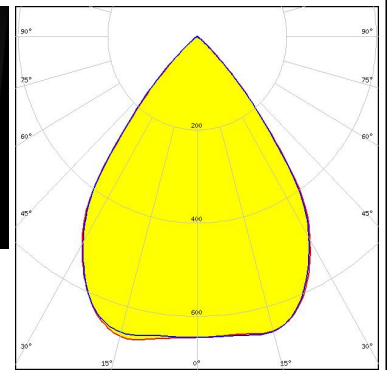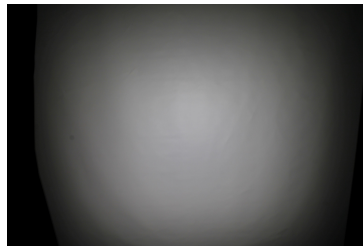

LED LinLED 156x28mm 2x400lm 827-865 2x2C 12V Opt G1
 FWHM / FWTM 74.5 + 75.5° / 93.0 + 93.5°
 Efficiency 79 %
 Peak intensity 0.6 cd/lm
 LEDs/each optic 4
 Light colour Tunable White
 Required components:
 C16590_DAISY-4X1-SHD

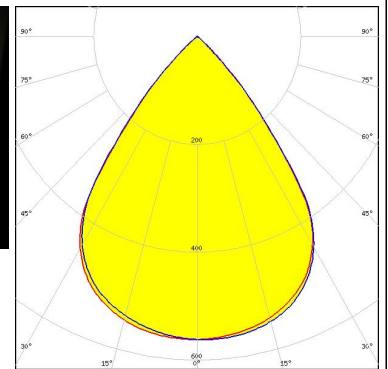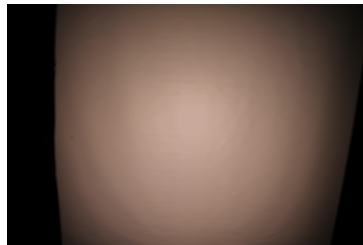

LED LinLED 156x28mm 2x400lm 827-865 2x2C 12V Opt G1
 FWHM / FWTM 74.0° / 94.0°
 Efficiency 94 %
 Peak intensity 0.7 cd/lm
 LEDs/each optic 4
 Light colour Tunable White
 Required components:
 C17528_DAISY-4X1-SHD-MET

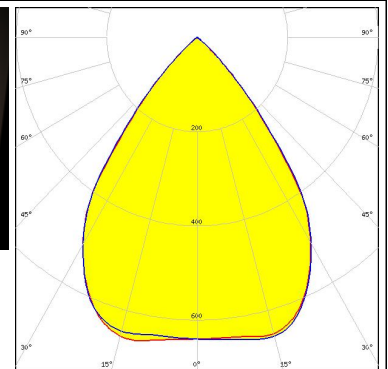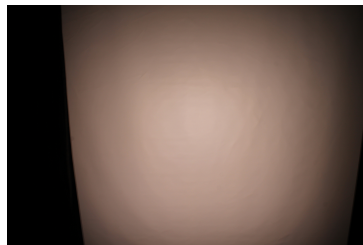


OPTICAL RESULTS (MEASURED):

MST

Your solutions


LED LinLED 156x28mm 2x400lm 827-865 2x2C 12V Opt G1
FWHM / FWTM 75.5 + 76.5° / 97.0 + 97.5°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C16784_DAISY-4X1-SHD-WHT

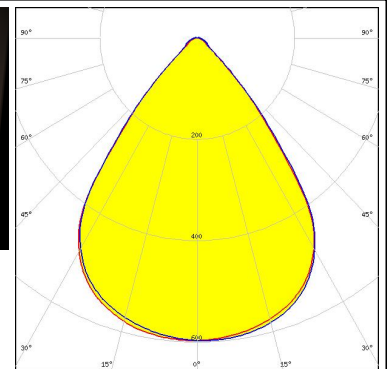

MST

Your solutions



LED LinLED 156x28mm 2x400lm 827-865 2x2C 12V Opt G1
FWHM / FWTM 74.0 + 74.5° / 94.5°
Efficiency 92 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C17535_DAISY-4X1-SHD2-MET-MATT

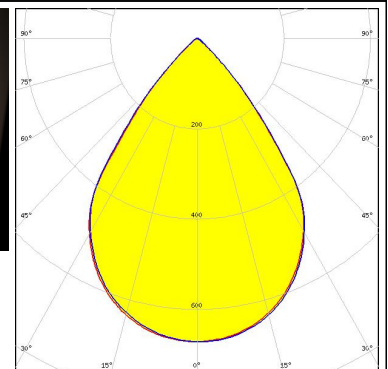

MST

Your solutions


LED LinLED 156x28mm 2x400lm 827-865 2x2C 12V Opt G1
FWHM / FWTM 74.5 + 75.0° / 93.5°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C17422_DAISY-4X1-SHD2-MATT

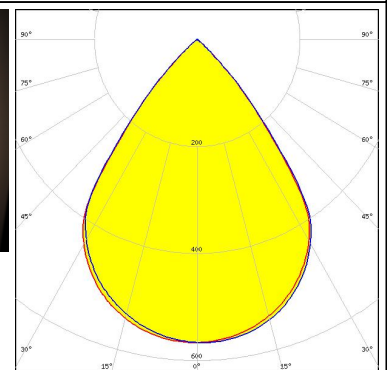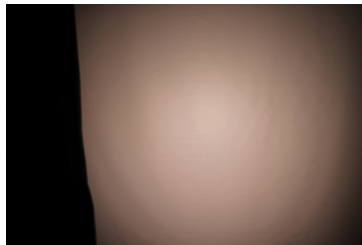

MST

Your solutions

LED LinLED 156x28mm 2x400lm 827-865 2x2C 12V Opt G1
FWHM / FWTM 76.0 + 76.5° / 97.0 + 97.5°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour Tunable White
Required components:
C17423_DAISY-4X1-SHD2-WHT-MATT


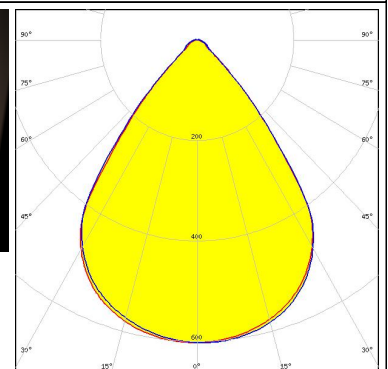


OPTICAL RESULTS (MEASURED):

MST

Your solutions


LED LinLED 156x28mm 800lm 8x0 2C 12V Opt G1
FWHM / FWTM 75.0 + 75.5° / 96.0 + 97.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17423_DAISY-4X1-SHD2-WHT-MATT

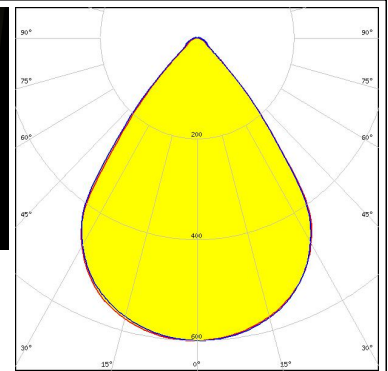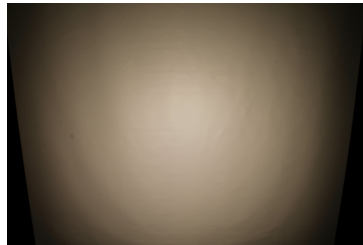

MST

Your solutions



LED LinLED 156x28mm 800lm 8x0 2C 12V Opt G1
FWHM / FWTM 74.0 + 74.5° / 92.5°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16590_DAISY-4X1-SHD

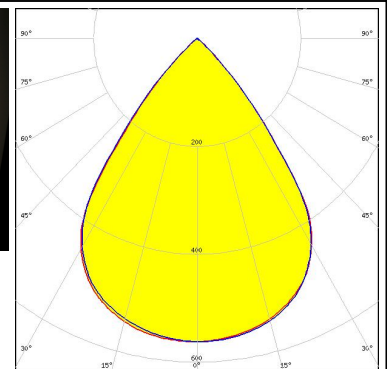

MST

Your solutions



LED LinLED 156x28mm 800lm 8x0 2C 12V Opt G1
FWHM / FWTM 73.5° / 93.0 + 93.5°
Efficiency 93 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17528_DAISY-4X1-SHD-MET

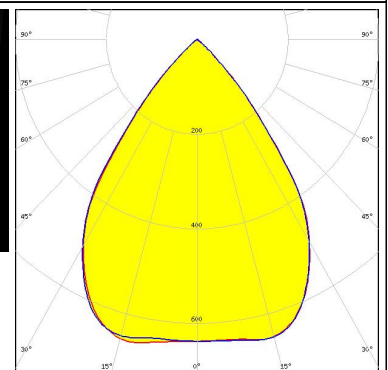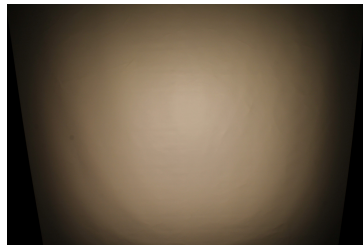

MST

Your solutions

LED LinLED 156x28mm 800lm 8x0 2C 12V Opt G1
FWHM / FWTM 75.5° / 96.5 + 97.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16784_DAISY-4X1-SHD-WHT

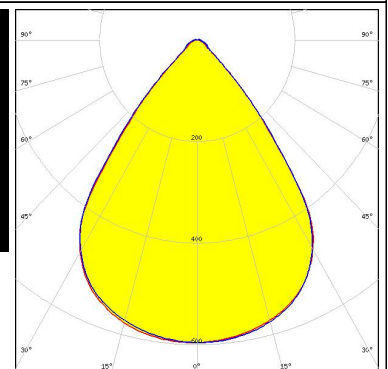
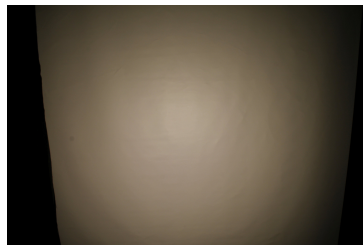


OPTICAL RESULTS (MEASURED):

MST

Your solutions



LED LinLED 156x28mm 800lm 8x0 2C 12V Opt G1
FWHM / FWTM 73.5° / 94.0 + 94.5°
Efficiency 90 %
Peak intensity 0.7 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17535_DAISSY-4X1-SHD2-MET-MATT

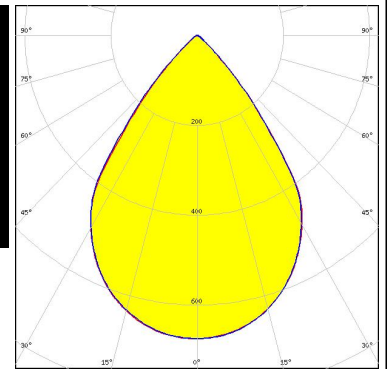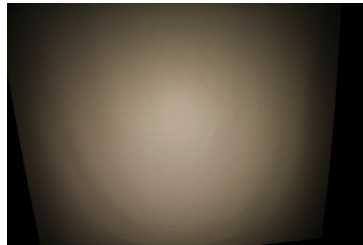

MST



Your solutions

LED LinLED 156x28mm 800lm 8x0 2C 12V Opt G1
FWHM / FWTM 74.5° / 92.5°
Efficiency 76 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17422_DAISSY-4X1-SHD2-MATT

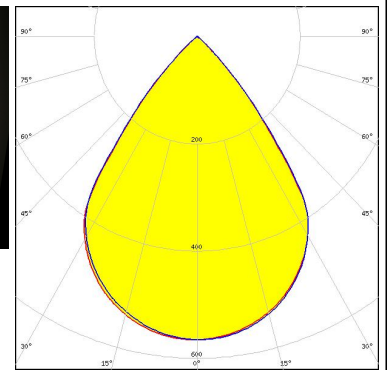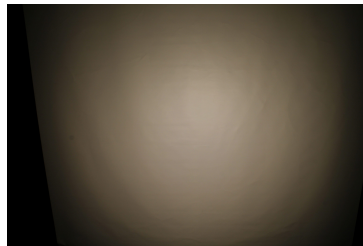



NICHIA

LED NF2W757G-MT (Tunable White)
FWHM / FWTM 80.0° / 95.0°
Efficiency 93 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16784_DAISSY-4X1-SHD-WHT

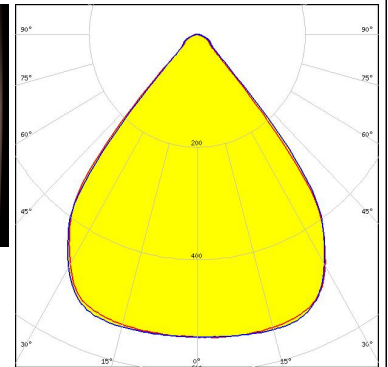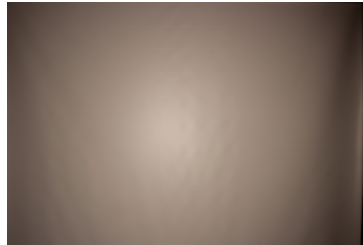

NICHIA



LED NF2W757G-MT (Tunable White)
FWHM / FWTM 79.0° / 90.0°
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 1
Light colour Tunable White
Required components:
C16590_DAISSY-4X1-SHD

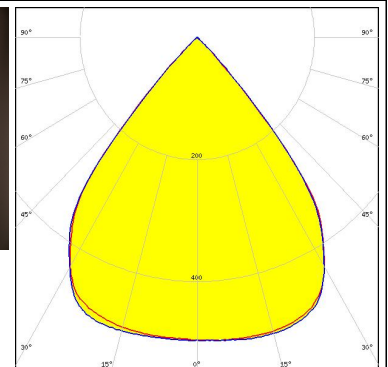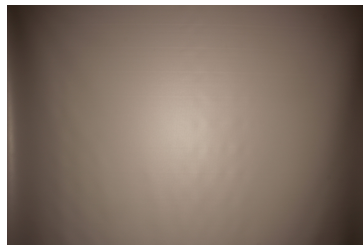

OPTICAL RESULTS (MEASURED):



OSRAM

LED PL-LIN-1000 140x24mm
FWHM / FWTM 74.0° / 94.0°
Efficiency 77 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17422_DAISSY-4X1-SHD2-MATT

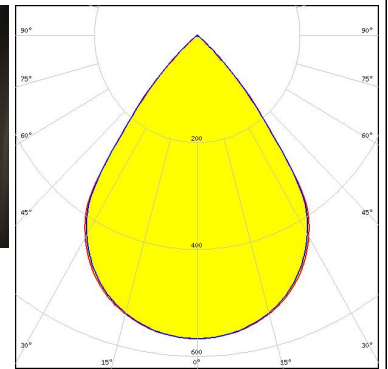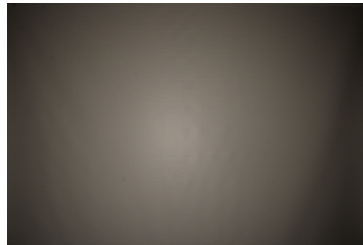



SAMSUNG

LED LM28xB Series
FWHM / FWTM 78.0° / 95.0°
Efficiency 93 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C16784_DAISSY-4X1-SHD-WHT

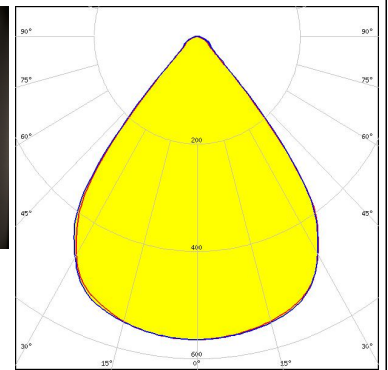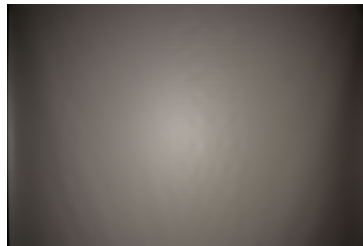



SAMSUNG

LED LM28xB Series
FWHM / FWTM 76.0° / 90.0°
Efficiency 78 %
Peak intensity 0.6 cd/lm
LEDs/each optic 1
Light colour White
Required components:
C17422_DAISSY-4X1-SHD2-MATT

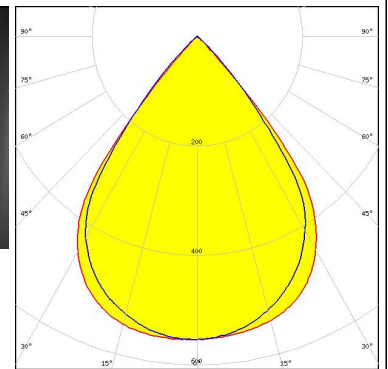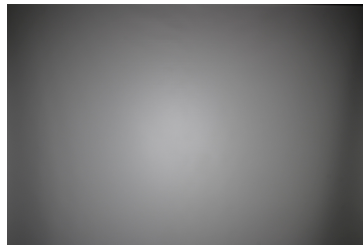

SAMSUNG



LED LM28xB Series
FWHM / FWTM 78.0° / 91.0°
Efficiency 79 %
Peak intensity 0.5 cd/lm
LEDs/each optic 2
Light colour White
Required components:
C16590_DAISSY-4X1-SHD

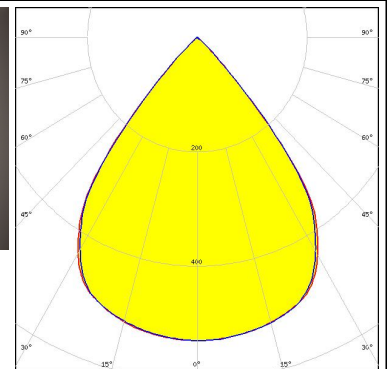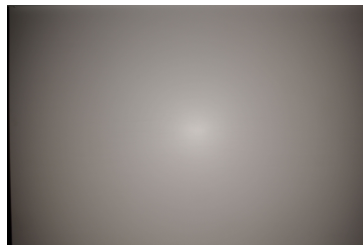


OPTICAL RESULTS (MEASURED):





LED PassivePAQ-L-0.5F35-SSA3-1.6K-840-3-DC
FWHM / FWTM 75.0° / 100.0°
Efficiency 92 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17423_DAISSY-4X1-SHD2-WHT-MATT

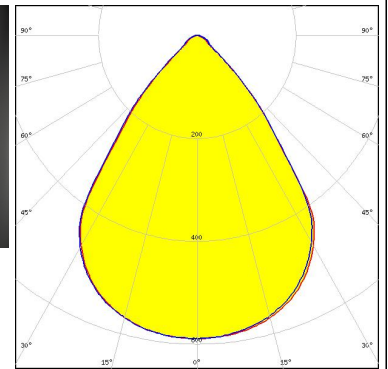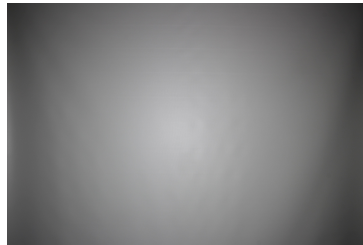


LED PassivePAQ-L-0.5F35-SSA3-1.6K-840-3-DC
FWHM / FWTM 75.0° / 96.0°
Efficiency 77 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16590_DAISSY-4X1-SHD

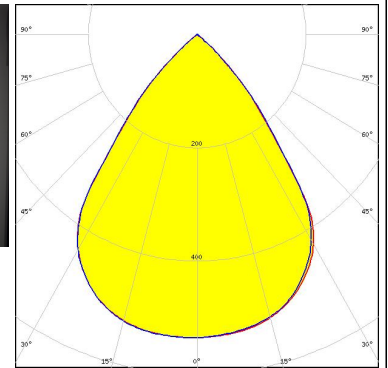

LED PassivePAQ-L-0.5F35-SSA3-1.6K-840-3-DC
FWHM / FWTM 74.0° / 96.0°
Efficiency 76 %
Peak intensity 0.5 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C17422_DAISSY-4X1-SHD2-MATT

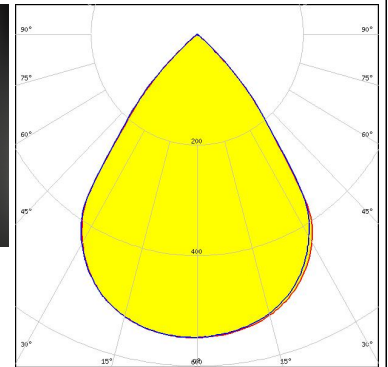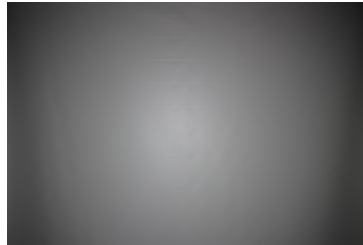


LED PassivePAQ-L-0.5F35-SSA3-1.6K-840-3-DC
FWHM / FWTM 76.0° / 101.0°
Efficiency 91 %
Peak intensity 0.6 cd/lm
LEDs/each optic 4
Light colour White
Required components:
C16784_DAISSY-4X1-SHD-WHT

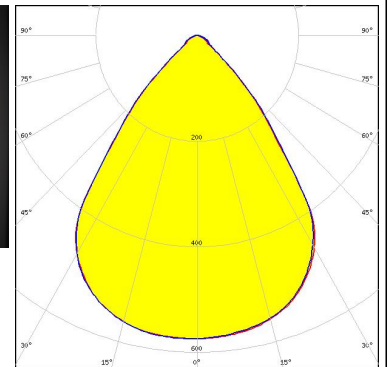

OPTICAL RESULTS (SIMULATED):

SAMSUNG

LED	LM28xB Series
FWHM / FWTM	74.0° / 92.0°
Efficiency	76 %
Peak intensity	0.6 cd/lm
LEDs/each optic	4
Light colour	White
Required components:	
	C17422_DAISSY-4X1-SHD2-MATT

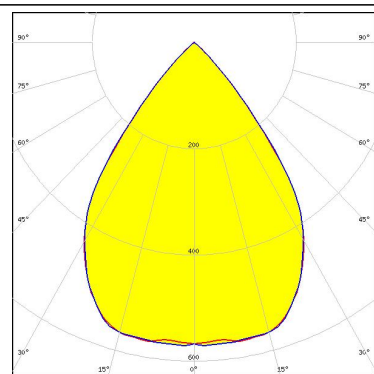

GENERAL INFORMATION:

NOTE: The typical beam angle will be changed by different color, chip size and chip position tolerance. The typical total beam angle is the full angle measured where the luminous intensity is half of the peak value.

MATERIALS:

As part of our continuous research and improvement processes, and to ensure the best possible quality and availability of our products, LEDiL reserves the right to change material grades without notice.

PRODUCT DATA USER AGREEMENT AND DISCLAIMER:

The measured data in the provided downloadable LEDiL Product Datasheets and Mechanical 2D-Drawings is rounded and provided as reference for planning. LEDiL Oy's optical specifications have been verified by conducting performance testing of the products in accordance with the company's quality system. The reported data are averaged results of multiple measurements with typical variation. LEDiL Oy reserves the right to without prior notification make changes and improvements to its products.

LEDiL Oy assumes neither warranty, nor guarantee nor any other liability of any kind for the contents and correctness of the provided data. The provided data has been generated with highest diligence but the provided data may in reality not represent the complete possible variation range of all intrinsic parameters. Therefore, in certain cases a deviation from the provided data could occur.

LEDiL Oy reserves the right to undertake technical changes of its products without further notification which could lead to changes in the provided data. LEDiL Oy assumes no liability of any kind for the possible deviation from any provided data or any other damage resulting from the usage of the provided data.

The user agrees to this disclaimer and user agreement with the download or usage of the provided files.

LEDiL Oy

Joensuunkatu 13
FI-24240 SALO
Finland

LEDiL Inc.

228 West Page Street
Suite D
Sycamore IL 60178
USA

Ledil Optics Technology (Shenzhen) Co., Ltd.

405 , Block B
Casic Motor Building
Shenzhen 518057
P.R.CHINA

Local sales and technical support

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)

Shipping locations

Salo, Finland
Hong Kong, China

Distribution Partners

[www.ledil.com/
where_to_buy](http://www.ledil.com/where_to_buy)