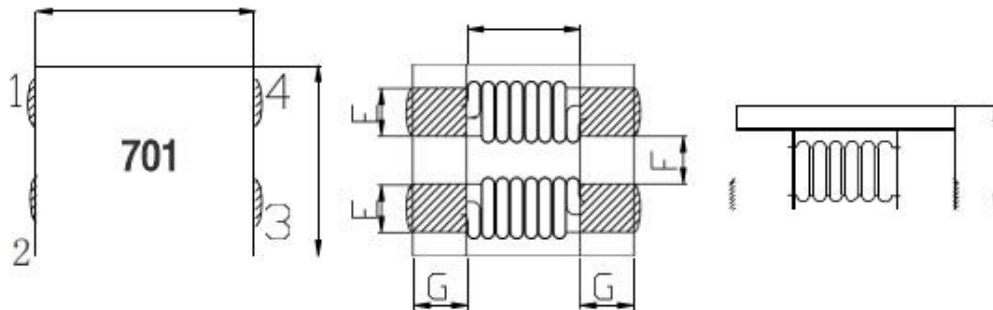


PRODUCT: SMD Wire Wound Common Mode Filter**SERIES: PCAQ7060M****PACKAGING DIMENSION: [Unit: mm]**A: 7.0 ± 0.5 B: 6.0 ± 0.5

C: 3.8MAX

D: 3.5Typ

E: 1.5 ± 0.2 F: 1.5 ± 0.2 G: 1.7 ± 0.2 **GENERAL SPECIFICATIONS:****RoHS
COMPLIANT**

P/N	Z (Ω)		DCR(m Ω) Max	Rated Current (A)Max	IR (M Ω) Min.	Rated Voltage(VDC) MAX
	Min	Typ				
PCAQ7060M-400	40	70	5	15.0	10	125
PCAQ7060M-101	100	140	10	9.0	10	125
PCAQ7060M-301	225	300	10	5.0	10	125
PCAQ7060M-501	275	350	10	5.0	10	125
PCAQ7060M-601	500	700	15	4.0	10	125
PCAQ7060M-701	500	700	15	4.0	10	125
PCAQ7060M-102	800	1020	17	3.0	10	125
PCAQ7060M-132	910	1300	21	2.5	10	125
PCAQ7060M-272	2000	2700	63	1.0	10	125
PCAQ7060M-302	2500	3000	75	0.9	10	125

备注:

◎规格参数基于环境温度25℃所得

◎阻抗测试频率 100MHZ/0.1V

◎电感加载工作电流将使本体温度上升40℃左右（电感初始温度+上升温度=电感最终承受温度）

◎电感工作环境温度：-25℃ ~ 100℃

◎务必考虑最终产品设计，元器件布局，线路板走线，以及使用环境等过程中，电感最终承受温度不得超过100℃

◎如需参考产品开发测试数据，请向我司索取单颗感值规格书



PROD TECHNOLOGY CO., LTD.

TEL : 0755-86667379

<http://www.prodtech.cn>

E-LIVEN TECHNOLOGY CO., LTD.

NO.28 ho-cheng RD, bade city, taoyuan,
taiwan