



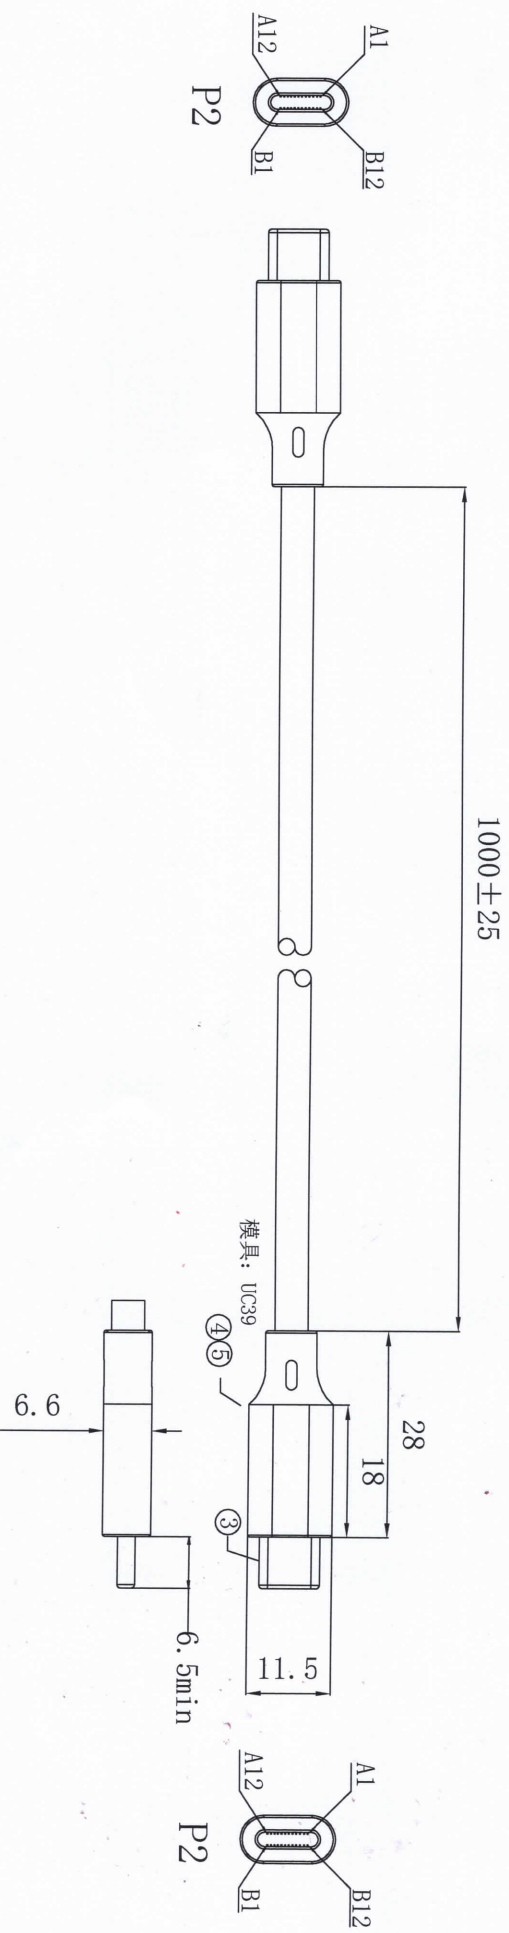

Electrical character:

- a. 100% open & short testing;
- b. Withstanding voltage:DC 300V 0.01Sec;
- c. Insulation resistance:5M Ohm (Min);
- d. Conductive resistance 3 Ohm (Max).



PIN ASSIGNMENT			
P1		P2	
B5	黄	B5	
A5	蓝	A5	
A4-B9-A9-B9	红	A4-B9-A9-B9	
A7	WHITE白	A7	
A6	GREEN绿	A6	
A1-B1-A12-B12	黑	A1-B1-A12-B12	

V/BUS
D-
D+
GND

5	PVC胶料	10g	J2-401101	PVC 40P Black UL94V-0
4	PE胶料	4g	J4-111106	MA1850A LDPE胶料
3	插头	IPcs	C2-11CC21	USB2.0 TYPE-C 拉伸电镀插头, PD不带芯片
2	插头	IPcs	C2-11CE21	USB2.0 TYPE-C 拉伸电镀插头, PD E-Marker 1米
1	Cable	1.05M	X2-458001	28AWG(7/0.127TS)/4C+20AWG(67/0.10TS)/2C+AL OD:4.5mm PVC 黑色雾面
0	DESCRIPTION	QTY.	PART NUMBER	DETAIL
TOLERANCE				
X.	±0.5	NAME	APPROVALS	DATE
X.X	±0.3	NAME	ALEX	20230403
X.XX	±0.20	NAME	何照培	20230403
X.XXX	±0.10	NAME		
ANGULAR	±1°	NAME		
UNLESS OTHERWISE SPECIFIED				
		DWG. TYPE	ENG. DWG	PROJECT CODE
				PHD
		UNIT	SCALE	SIZE
		mm	1:1	A4
		SHEET	1/1	DWG. No.
				280450-100CCCE1
				00

cenpeon
东莞市讯联电子有限公司