


*f $\underline{\underline{\varnothing 0.8 \pm 0.15}}$

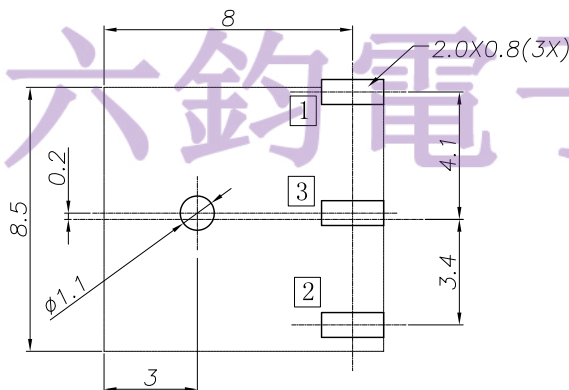

Specification:

1. Rating : DC 20V 2A.
 2. Contact resistance: $\leq 50\text{m}\Omega$.
After test: $\leq 100\text{m}\Omega$.
 3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC500V).
After test: $\geq 50\text{M}\Omega$.
 4. Withstanding voltage: 500VAC.
 5. Insertion and extraction force: 3N~30N.
 6. life test: 5000cycles min.
 7. Operation temperature range: $-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$.
 8. Preservative temperature range: $-40^{\circ}\text{C} \sim 85^{\circ}\text{C}$.
- TEL:0769-82310511-867

<i>Model No.</i>		
<i>PIN</i>	$\varnothing 1.0$	$\varnothing 1.3$
<i>PLUG O.D.</i>	$1.05^{+0.10}_{-0.00}$	$1.35^{+0.10}_{-0.00}$

DC-006	DC-006-1
CIRCUIT DIAGRAM	

□ : TERMINAL NO.

					TOLERANCE UNLESS SPECIFIED								
					UP TO 5mm:±0.1 ABOVE 5mm:±0.2	ANGULAR ±1°	1						
5	SHUNT TERMINAL	BRASS	1	AG/SN-Plated			NO	DATE	REVISIONS			BY	APPD
4	TIP SPRING	SUS	1	AG/SN-Plated	TITLE: DC JACK				UNIT : MM	ROHS	DWN		
3	CENTER PIN TERMINAL	BRASS	1	AG/SN-Plated	MODEL: LEC-DC-006-1.3				SCALE: 1:1	COMPLIANT	CHK'D		
2	CENTER PIN	BRASS	1	NI-PLATED	LEGION ELECTRONIC&HARDW ARE CO.,LTD 东莞市六钧电子五金有限公司						APPD		
1	HOUSING	PBT/PA66	1										
NO.	PART NAME	MATERIAL	QTY	FINISHING							PRO.AGL:		REV:A0