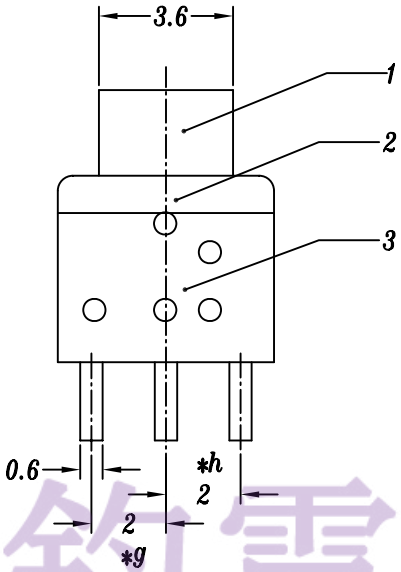
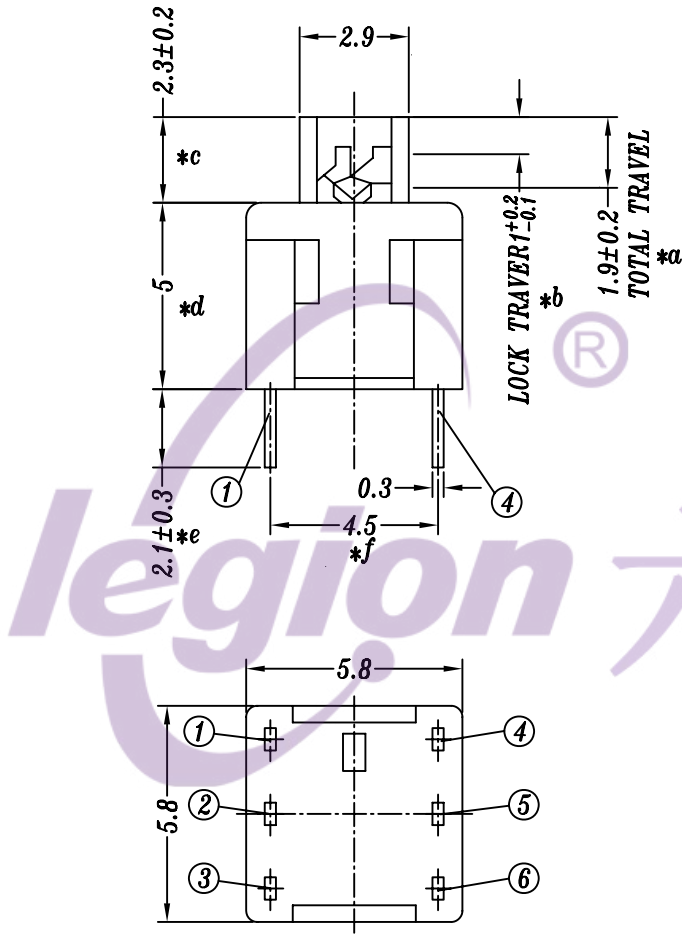


P.C.B. LAYOUT

SPECIFICATION

1. Rating: DC 12V 0.3A
2. Function: 2P2T
3. Contact Resistance: $\leq 70\text{m}\Omega$ MAX
4. Operating Force: $180 \pm 80\text{gf}$, $250 \pm 100\text{gf}$
5. Life test: 10,000 cycles

					TOLERANCE UNLESS SPECIFIED								
					UP TO 5mm: ±0.1	ANGULAR	A0	2017.12.29	初 版			GYW	
					ABOVE 5mm: ±0.2	±1°	NO	DATE	REVISIONS			BY	APPD
5	CAMSTICK	SUS	1	NATURAL	TITLE: VERTICAL PUSH SWITCH				UNIT : MM	ROHS	DWN		
4	SPRING	SUS	1	NATURAL	MODEL: PB-22E60PB-S-C H2.3 T2.1				SCALE: 5:1	COMPLIANT	CHK'D		
3	CASE	PA66/0.3mm BRASS	1	GREY/Ag PLATED	东莞市六钧电子五金有限公司					APPD			
2	COVER	PA66	1	BLACK									
1	KNOB	PA66/0.045mm PBS	1	WHITE/BLACK/Ag CLAD									
NO.	PART	NAME	MATERIAL	QTY	FINISHING						PRO.AGL:	 	REV :A0