
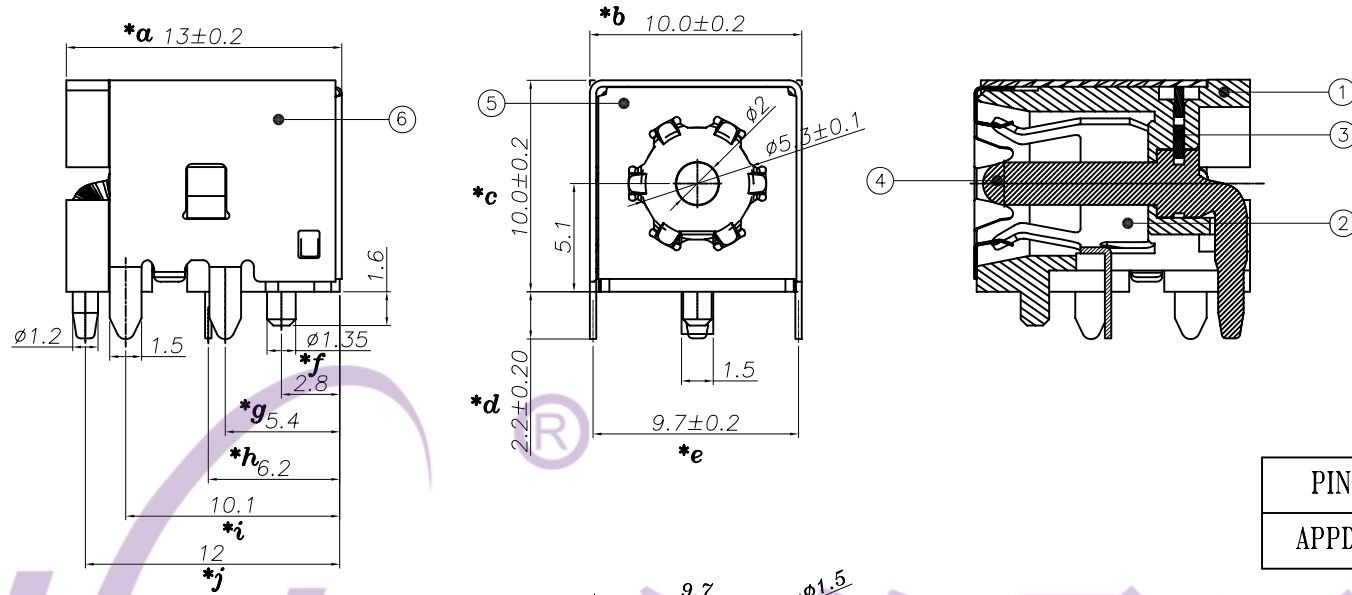

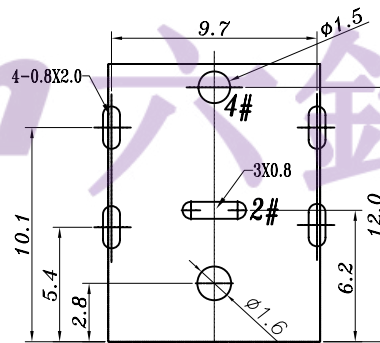


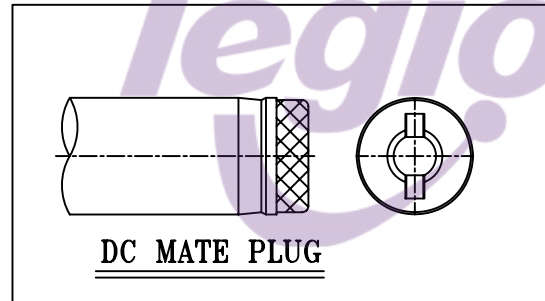

PIN	Ø2.0	Ø2.5
APPD.		

PCB LAYOUT
(TOP VIEW)

NOTE:

1. 接触电阻: 50mΩ max
2. 绝缘电阻: 100MΩ min
3. 插拔力: 5--30N
4. 寿命测试5000次
5. 耐压250VAC 漏电流0.5ma 1分钟

					TOLERANCE UNLESS SPECIFIED									
					UP TO 5mm: ±0.1 ABOVE 5mm: ±0.2	ANGULAR ±1°	A1	2023.07.20	更新铜针材质为锌合金		GYW			
							A0	2020.01.08	首次发行		GYW			
							NO	DATE	REVISIONS		DWN	BY	APPD	
					TITLE: DC JACK				UNIT : MM	ROHS COMPLIANT	DWN			
					MODEL: DC-528A φ 2.5-AU				SCALE: 1:1		CHK'D			
											APPD			
					东莞市六钧电子五金有限公司						PRO.AGL: 	REV :A1		
NO.	PART	NAME	MATERIAL	QTY	FINISHING									
6	DC528A COAT	SUS	1	Ni-PLATED										
5	DC528 COVER	SUS	1	WASH										
4	DC528 4#PIN	ZN ALLOY	1	Au-PLATED										
3	DC528 FLAT PIECE	BRASS	1											
2	DC528 2#SPRING PIECE	PHOSPHOR BRONZE	1	Au-PLATED										
1	DC528 CASE	PA9T	1											