HAOYU

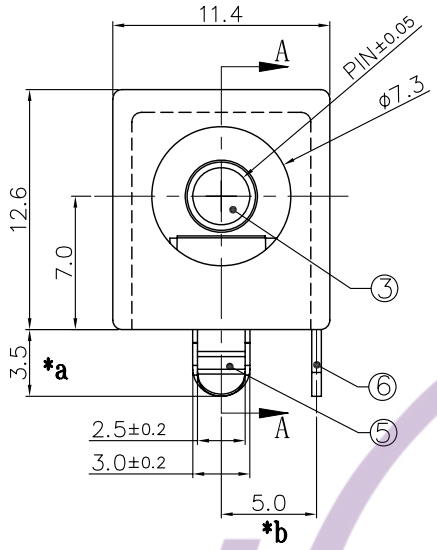

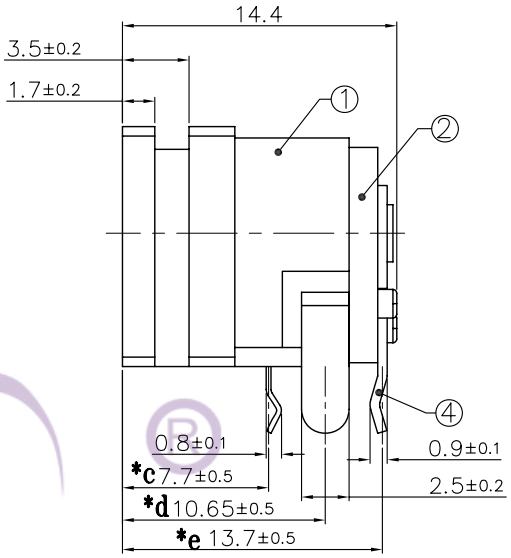

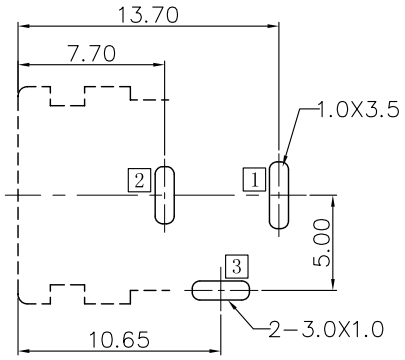

RECOMMENDED P.C.B. LAYOUT
UNSPECIFIED TOLERANCE: ±0.05
(TOP VIEW)

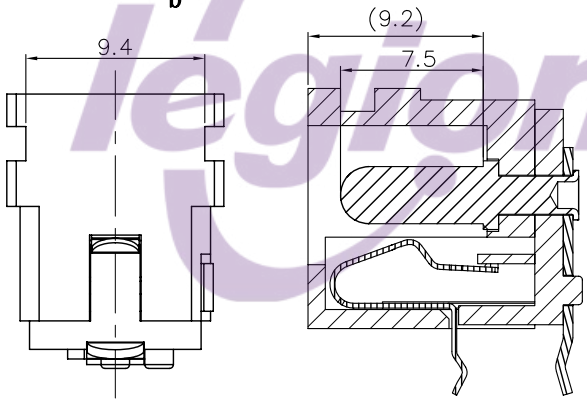

SECTION A-A
(插针规格：⌀3.0)

SECTION A-A
(插针规格：⌀2.0 & ⌀2.5)

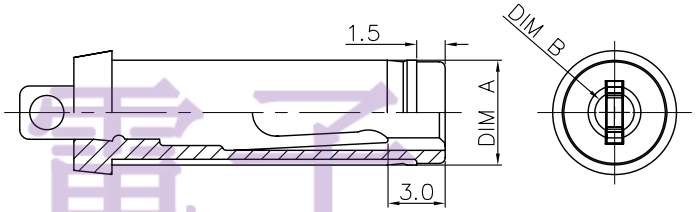

DC MATE PLUG

PIN	ø2.0	ø2.5	ø3.0
DIM A	ø6.3±0.05	ø6.3±0.05	ø6.55±0.05
DIM B	ø2.05$^{+0.10}_{-0.00}$	ø2.55$^{+0.10}_{-0.00}$	ø3.05$^{+0.10}_{-0.00}$

Model No.	DC-062	DC-062-1
Schematic		
CIRCUIT DIAGRAM		

NO.	PART NAME	MATERIAL	QTY	FINISHING
6	Shunt Terminal [3]	BRASS	1	Ag/Sn-PLATED
5	Tip spring [2]	SUS	1	Ag/Sn-PLATED
4	Center pin terminal [1]	BRASS	1	Ag/Sn-PLATED
3	Center pin	BRASS	1	Sn PLATED
2	Cover	PBT	1	BLACK
1	Housing	PBT	1	BLACK

TOLERANCE UNLESS SPECIFIED
UP TO 5mm: ±0.1
ABOVE 5mm: ±0.2
ANGULAR ±1°

NO	DATE	REVISIONS	BY	APPD
1				

TITLE: DC JACK
MODEL: DC-062φ3.0
UNIT : MM
SCALE: 3:1
ROHS COMPLIANT

DWN
CHK'D
APPD
PRO.AGL:

东莞市六钧电子五金有限公司

REV :A0

legion 六鈞電子