


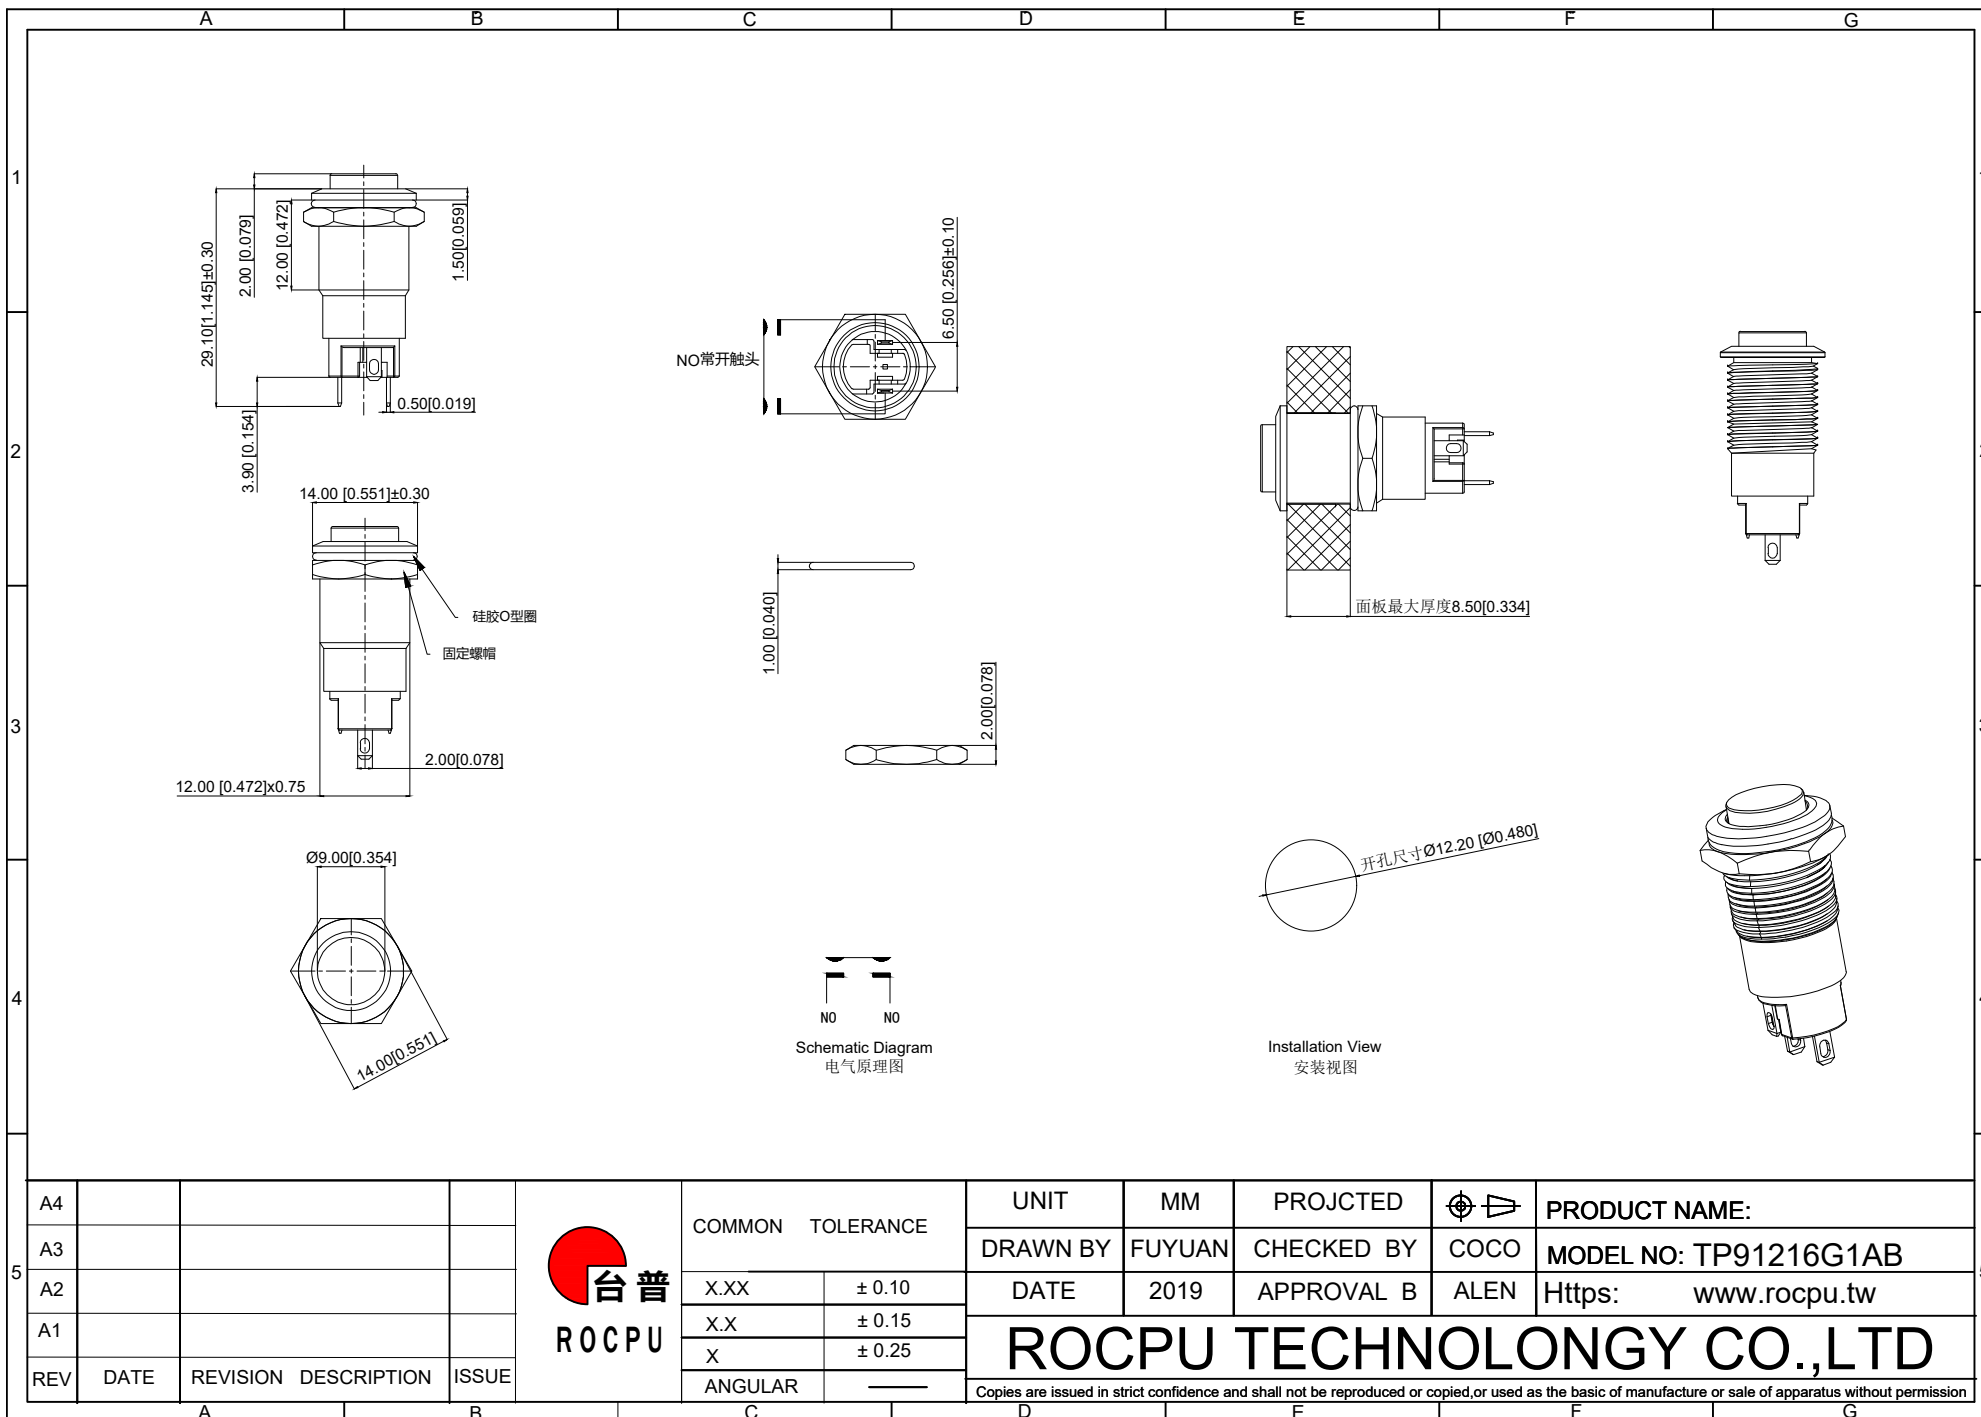

A		B		C		D		E		F		G		
性能参数														
1	1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A						12. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃							
	2. Rated current:2A/DC36V 额定电流:2A/DC36V						13. Compression torque: ≤ 3N 按压扭力: ≤3N							
	3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ						14. Electrical life: 500000 cycles 电气寿命: 500000 cycles							
	4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ						15. mechanical: 500000cycles 机械寿命: 500000cycles							
2	5. Pressing stroke:2.30mm ± 0.10 按压行程:2.30mm ± 0.10						16. Operation method:Self-locking 操作方式: 自锁式							
	6. Contact stroke:1.00mm±0.10 接触行程 :1.00mm±0.10						17. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N							
3	7. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃													
	8. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration													
	9. Nut assembly torque:5-14N 螺帽装配力矩:5-14N													
	10. Protection level:IP65 防护等级:IP65													
4	11. Explosion prevention level: IK08													

	A	B	C	D	E	F	G
1	材质参数						
	10						
	9						
	8	Base 底座	PA66	1	Black 黑色		
	7	Pin 引脚	Brass 黄铜	1	gold-plating 镀金		
	6	Contact material 接触材质	Silvering 镀银	1	Silvering 镀银		
	5	Base 基座	PA66	1	Black 黑色		
	4	Arm nut 固定螺帽	Brass 黄铜	1	nickeling 镀镍		
	3	Oring O型圈	Silica gel 硅胶	1			
2	2	Housing 外壳	Aluminum alloy 铝合金	1	Oxidized/Black 氧化/黑色		
	1	Key 按键	Aluminum alloy 铝合金	1	Oxidized/Black 氧化/黑色		
	NO 序号	Part name 部件名	Material 材料	QTY 数量	Remark 备注		

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91216G1AB
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION DESCRIPTION	ISSUE		X	± 0.25					
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission				

A	B	C	D	E	F	G
---	---	---	---	---	---	---