


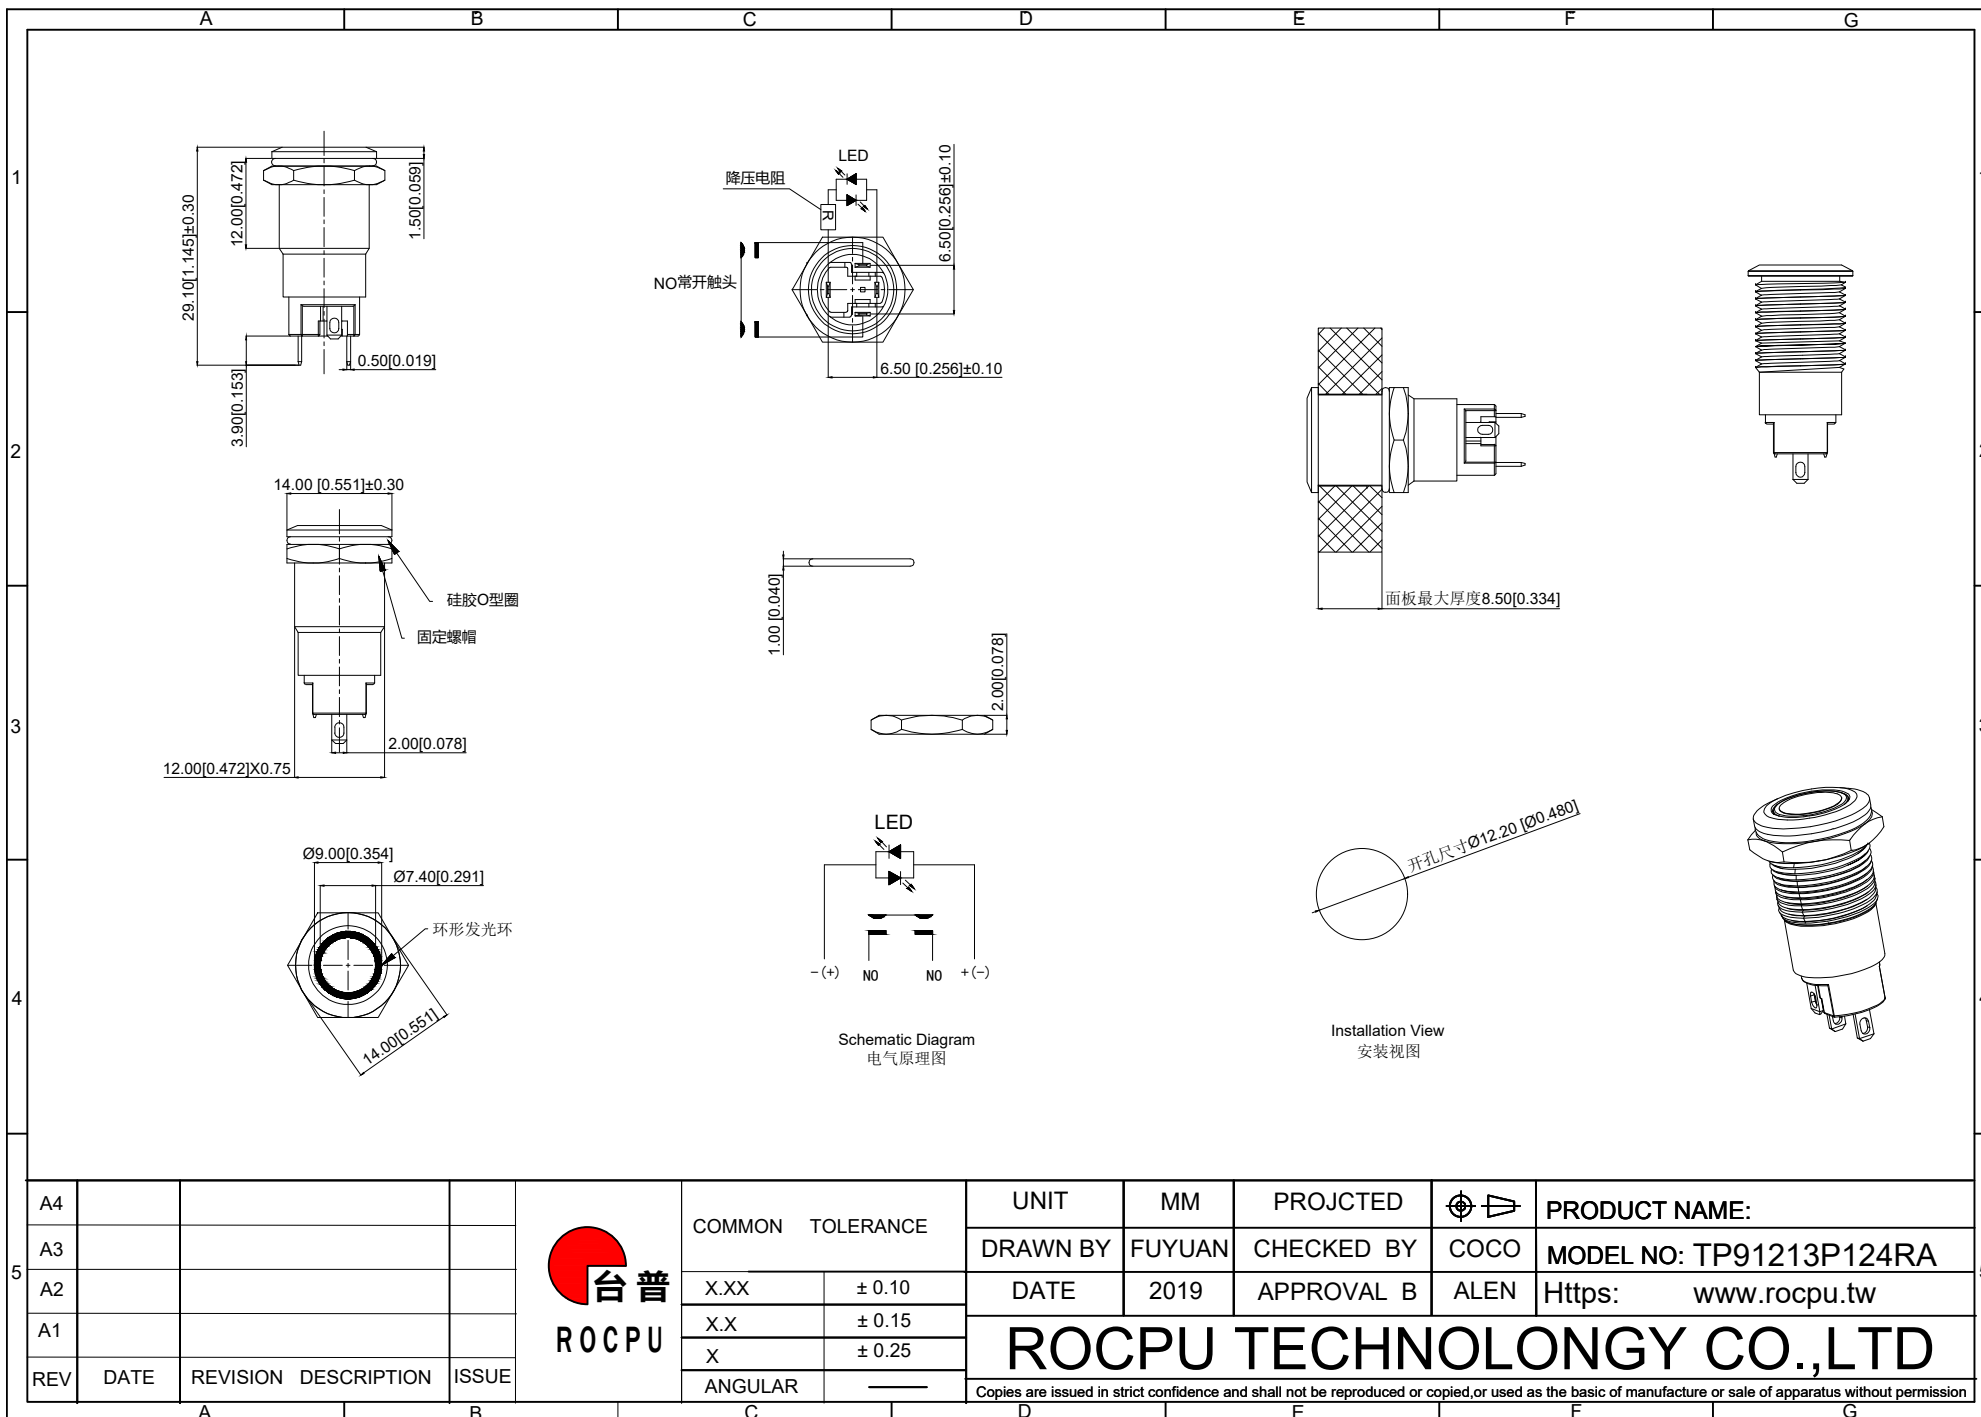

		A		B		C		D		E		F		G	
1	性能参数														
	1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A														
	2. Rated current:2A/DC36V 额定电流:2A/DC36V														
	3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ														
	4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ														
	5. Pressing stroke:2.30mm ± 0.10 按压行程:2.30mm ± 0.10														
	6. Contact stroke:1.00mm±0.10 接触行程 :1.00mm±0.10														
	7. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃														
	8. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration														
	9. Nut assembly torque:5-14N 螺帽装配力矩:5-14N														
	10. Protection level:IP65 防护等级:IP65														
2	11. Explosion prevention level: IK08 防暴等级: IK08														
	12. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃														
	13. Compression torque: ≤ 3N 按压扭力: ≤3N														
	14. Electrical life: 500000 cycles 电气寿命: 500000 cycles														
	15. mechanical: 500000cycles 机械寿命: 500000cycles														
	16. Operation method:Self-locking 操作方式: 自锁式														
	17. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N														
	18. LED lamp power consumption: 20m以下 LED灯功耗: 20m以下														
	19. LED lamp lifespan: 40000h LED寿命: 40000h														
	20. LED color: Red LED颜色: 红色														
	3														
4															
	5														
A4															
A3															
A2															
A1															
REV		DATE		REVISION DESCRIPTION		ISSUE									
		A		B		C		D		E		F		G	

A		B		C		D		E		F		G	
材质参数													
10	luminous zone 发光区			PC 塑料		1							
9	LEDpin LED脚			Brass 黄铜		1		Silvering 镀银					
8	Base 底座			PA66		1		Black 黑色					
7	Pin 引脚			Brass 黄铜		1		gold-plating 镀金					
6	Contact material 接触材质			Silvering 镀银		1							
5	Base 基座			PA66		1		Black 黑色					
4	Arm nut 固定螺帽			Brass 黄铜		1		nickeling 镀镍					
3	Oring O型圈			Silica gel 硅胶		1							
2	Housing 外壳			Aluminum alloy 铝合金		1		Oxidized/Black 氧化/黑色					
1	Key 按键			Aluminum alloy 铝合金		1		Oxidized/Black 氧化/黑色					
NO 序号	Part name 部件名			Material 材料		QTY 数量		Remark 备注					

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:	
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91213P124RA	
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw	
A1					X	± 0.25	ROCPCU TECHNOLOGY CO.,LTD					
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR						