


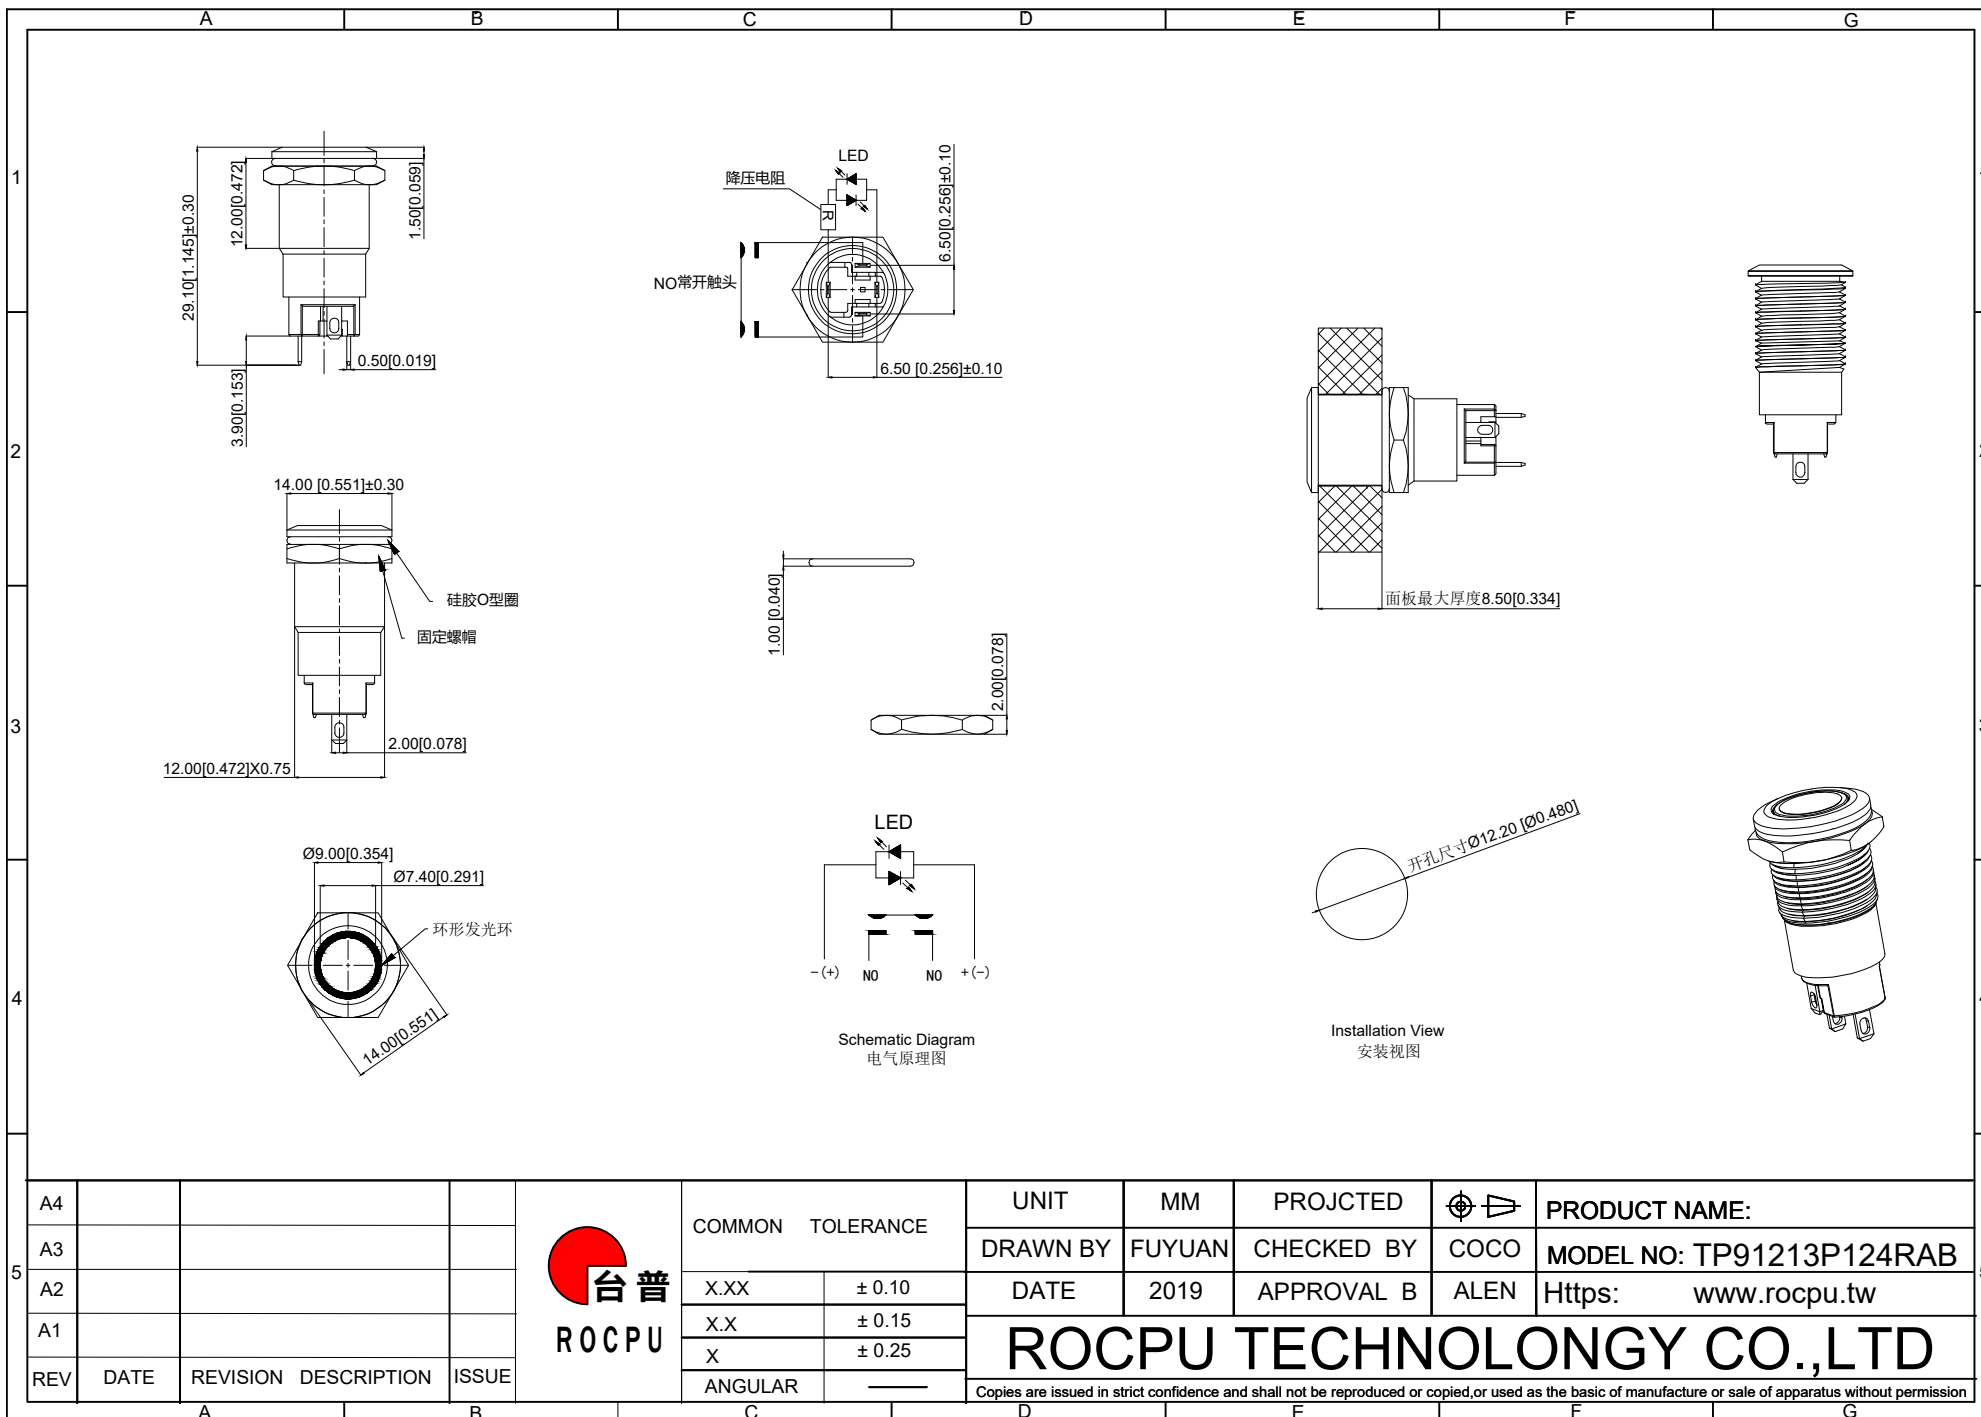

A		B		C		D		E		F		G	
1	性能参数												
	1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A						13. Compression torque: ≤ 3N 按压扭力: ≤3N						
	2. Rated current:2A/DC36V 额定电流:2A/DC36V						14. Electrical life: 500000 cycles 电气寿命: 500000 cycles						
	3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ						15. mechanical: 500000cycles 机械寿命: 500000cycles						
	4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ						16. Operation method:Self-locking 操作方式: 自锁式						
	5. Pressing stroke:2.30mm ± 0.10 按压行程:2.30mm ± 0.10						17. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N						
	6. Contact stroke:1.00mm±0.10 接触行程 :1.00mm±0.10						18. LED lamp power consumption: 20m以下 LED灯功耗: 20m以下						
	7. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃						19. LED lamp lifespan: 40000h LED寿命: 40000h						
	8. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration						20. LED color: Red LED颜色: 红色						
	9. Nut assembly torque:5-14N 螺帽装配力矩:5-14N												
2	10. Protection level:IP65 防护等级:IP65												
	11. Explosion prevention level: IK08 防暴等级: IK08												
	12. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃												
3													
4													
5													

A					B					C					D					E					F					G				
材质参数																																		
10		luminous zone 发光区								PC 塑料								1																
9		LEDpin LED脚								Brass 黄铜								1				Silvering 镀银												
8		Base 底座								PA66								1				Black 黑色												
7		Pin 引脚								Brass 黄铜								1				gold-plating 镀金												
6		Contact material 接触材质								Silvering 镀银								1																
5		Base 基座								PA66								1				Black 黑色												
4		Arm nut 固定螺帽								Brass 黄铜								1				nickeling 镀镍												
3		Oring O型圈								Silica gel 硅胶								1																
2		Housing 外壳								Aluminum alloy 铝合金								1				Oxidized/Black 氧化/黑色												
1		Key 按键								Aluminum alloy 铝合金								1				Oxidized/Black 氧化/黑色												
NO 序号		Part name 部件名								Material 材料								QTY 数量				Remark 备注												

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:			
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91213P124RAB			
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw			
A1					X	± 0.25	ROCPCU TECHNOLOGY CO.,LTD							
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR							—	
Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission														

A				B				C				D				E				F				G			
---	--	--	--	---	--	--	--	---	--	--	--	---	--	--	--	---	--	--	--	---	--	--	--	---	--	--	--