

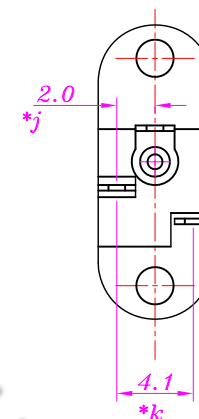
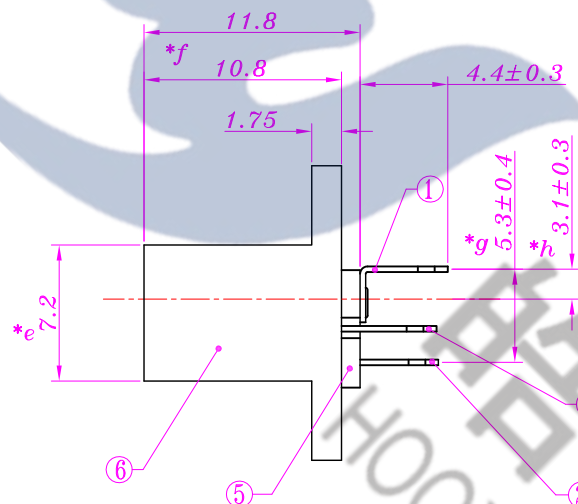


SPECIFICATION

1. Rating : DC 30V 0.5A.
2. Contact resistance: $\leq 100\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (DC250V).
4. Withstanding voltage: 500VAC .
5. Insertion and extraction force: 3-30N.
6. Life test: 5,000 cycles.
7. Operation temperature range: $-25^{\circ}\text{C} \sim 85^{\circ}\text{C}$.

P.C.B LAYOUT

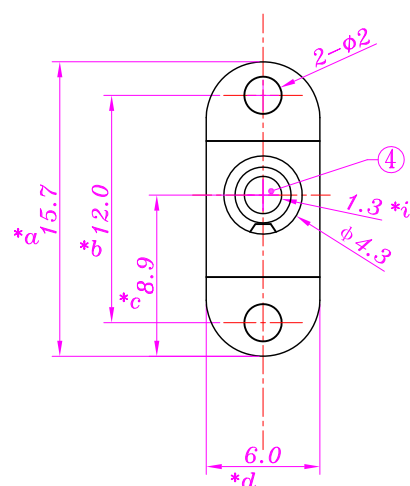

					TOLERANCE UNLESS SPECIFIED									
6	CASE	PBT	1	BLACK	<1.5: ±0.1mm	ANGULAR ±1°	1							
5	COVER	PCB	1	YELLOW	>1.5~5.0: ±0.25mm		NO	DATE	REVISIONS			BY	APPD	
					>5.0: ±0.3mm									
4	PING	BRASS	1	Ni-PLATED	TITLE: DC JACK				UNIT : MM	ROHS	DWN			
3	SPRING	BRASS	1	Ag-PLATED	MODEL: DC-008-1.3-01				SCALE: 1:1	COMPLIANT	CHK'D			
2	CURVE PIECE	PHENOLIC RESIN	1	Ag-PLATED	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司				APPD		PRO.AGL:  		REV : A	
1	FLAT PIECE	BRASS	1	Ag-PLATED										
NO.	PART NAME	MATERIAL	QTY	FINISHING										