


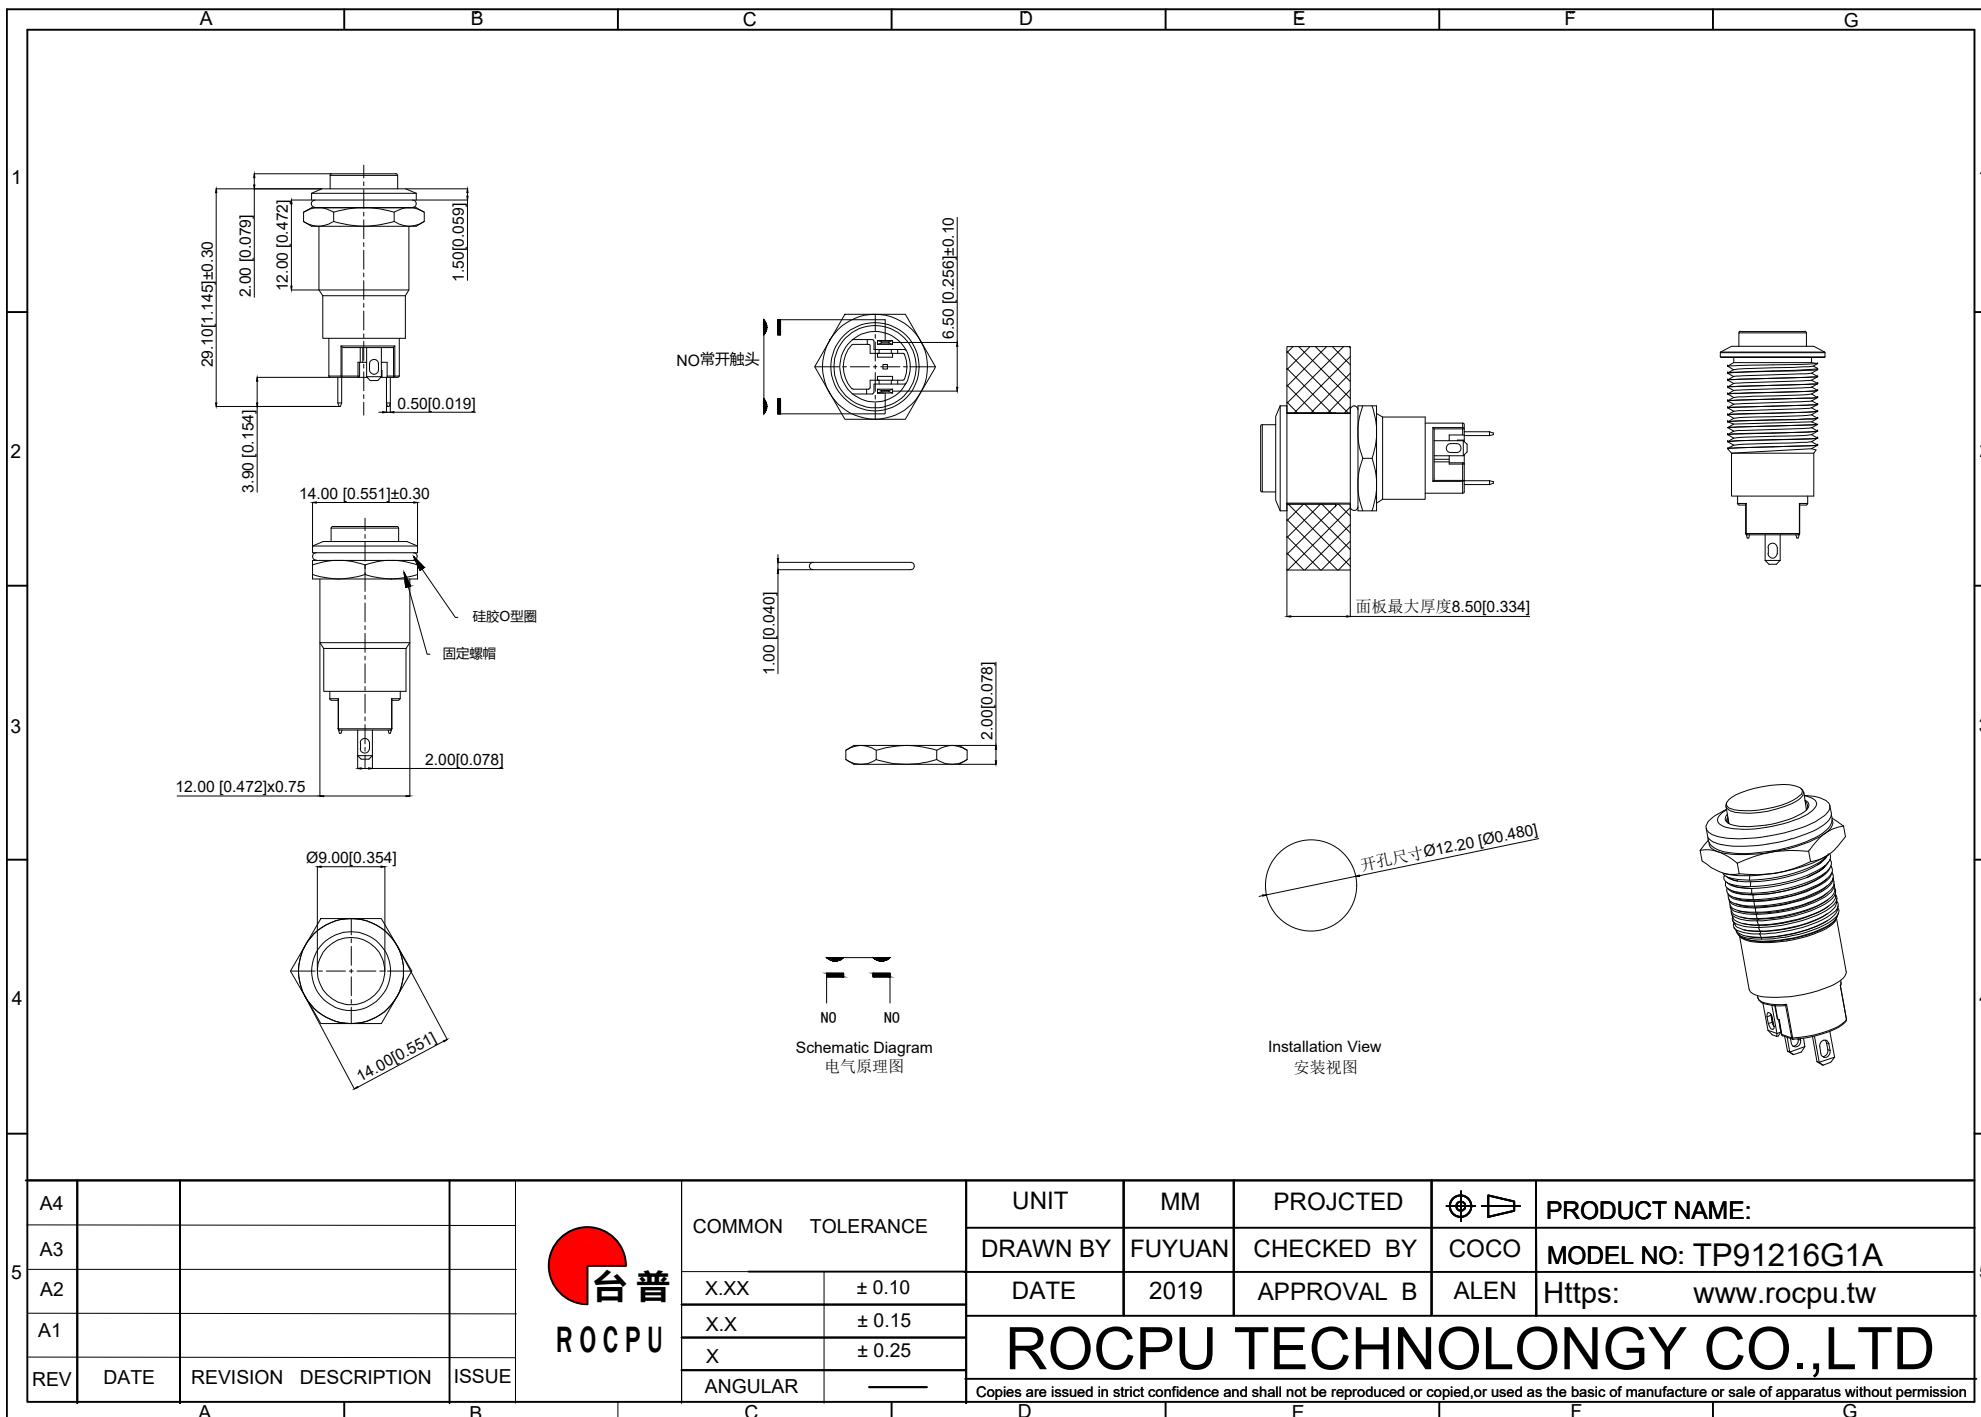

	A	B	C	D	E	F	G							
性能参数	1	1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A		12. Working environment temperature: -20 °C~+55 °C 工作环境温度: -20 °C~+55 °C				1						
		2. Rated current:2A/DC36V 额定电流:2A/DC36V		13. Compression torque: ≤ 3N 按压扭力: ≤3N										
		3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ		14. Electrical life: 500000 cycles 电气寿命: 500000 cycles										
		4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ		15. mechanical: 500000cycles 机械寿命: 500000cycles										
		5. Pressing stroke:2.30mm ± 0.10 按压行程:2.30mm ± 0.10		16. Operation method:Self-locking 操作方式: 自锁式										
		6. Contact stroke:1.00mm±0.10 接触行程 :1.00mm±0.10		17. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N										
		7. welding temperature: 320 °C± 20 °C 焊接温度: 320 °C± 20 °C												
		8. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration												
		9. Nut assembly torque:5-14N 螺帽装配力矩:5-14N												
		10. Protection level:IP65 防护等级:IP65												
11. Explosion prevention level: IK08														
4								4						
5	A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:	5	
	A3								DRAWN BY	FUYUAN	CHECKED BY	COCO		MODEL NO: TP91216G1A
	A2								DATE	2019	APPROVAL B	ALEN		Https: www.rocpcu.tw
	A1								ROCPCU TECHNOLOGY CO.,LTD					
	REV	DATE	REVISION	DESCRIPTION		ISSUE								Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission
	A	B	C	D	E	F	G							

A		B		C		D		E		F		G	
材质参数													
10													
9													
8	Base 底座			PA66			1			Black 黑色			
7	Pin 引脚			Brass 黄铜			1			gold-plating 镀金			
6	Contact material 接触材质			Silvering 镀银			1			Silvering 镀银			
5	Base 基座			PA66			1			Black 黑色			
4	Arm nut 固定螺帽			Brass 黄铜			1			nickeling 镀镍			
3	Oring O型圈			Silica gel 硅胶			1						
2	Housing 外壳			Aluminum alloy 铝合金			1			Oxidized/Black 氧化/黑色			
1	Key 按键			Aluminum alloy 铝合金			1			Oxidized/Black 氧化/黑色			
NO 序号	Part name 部件名			Material 材料			QTY 数量			Remark 备注			

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3					X.XX	± 0.10	DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91216G1A
A2					X.X	± 0.15	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X	± 0.25	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE	ANGULAR					