


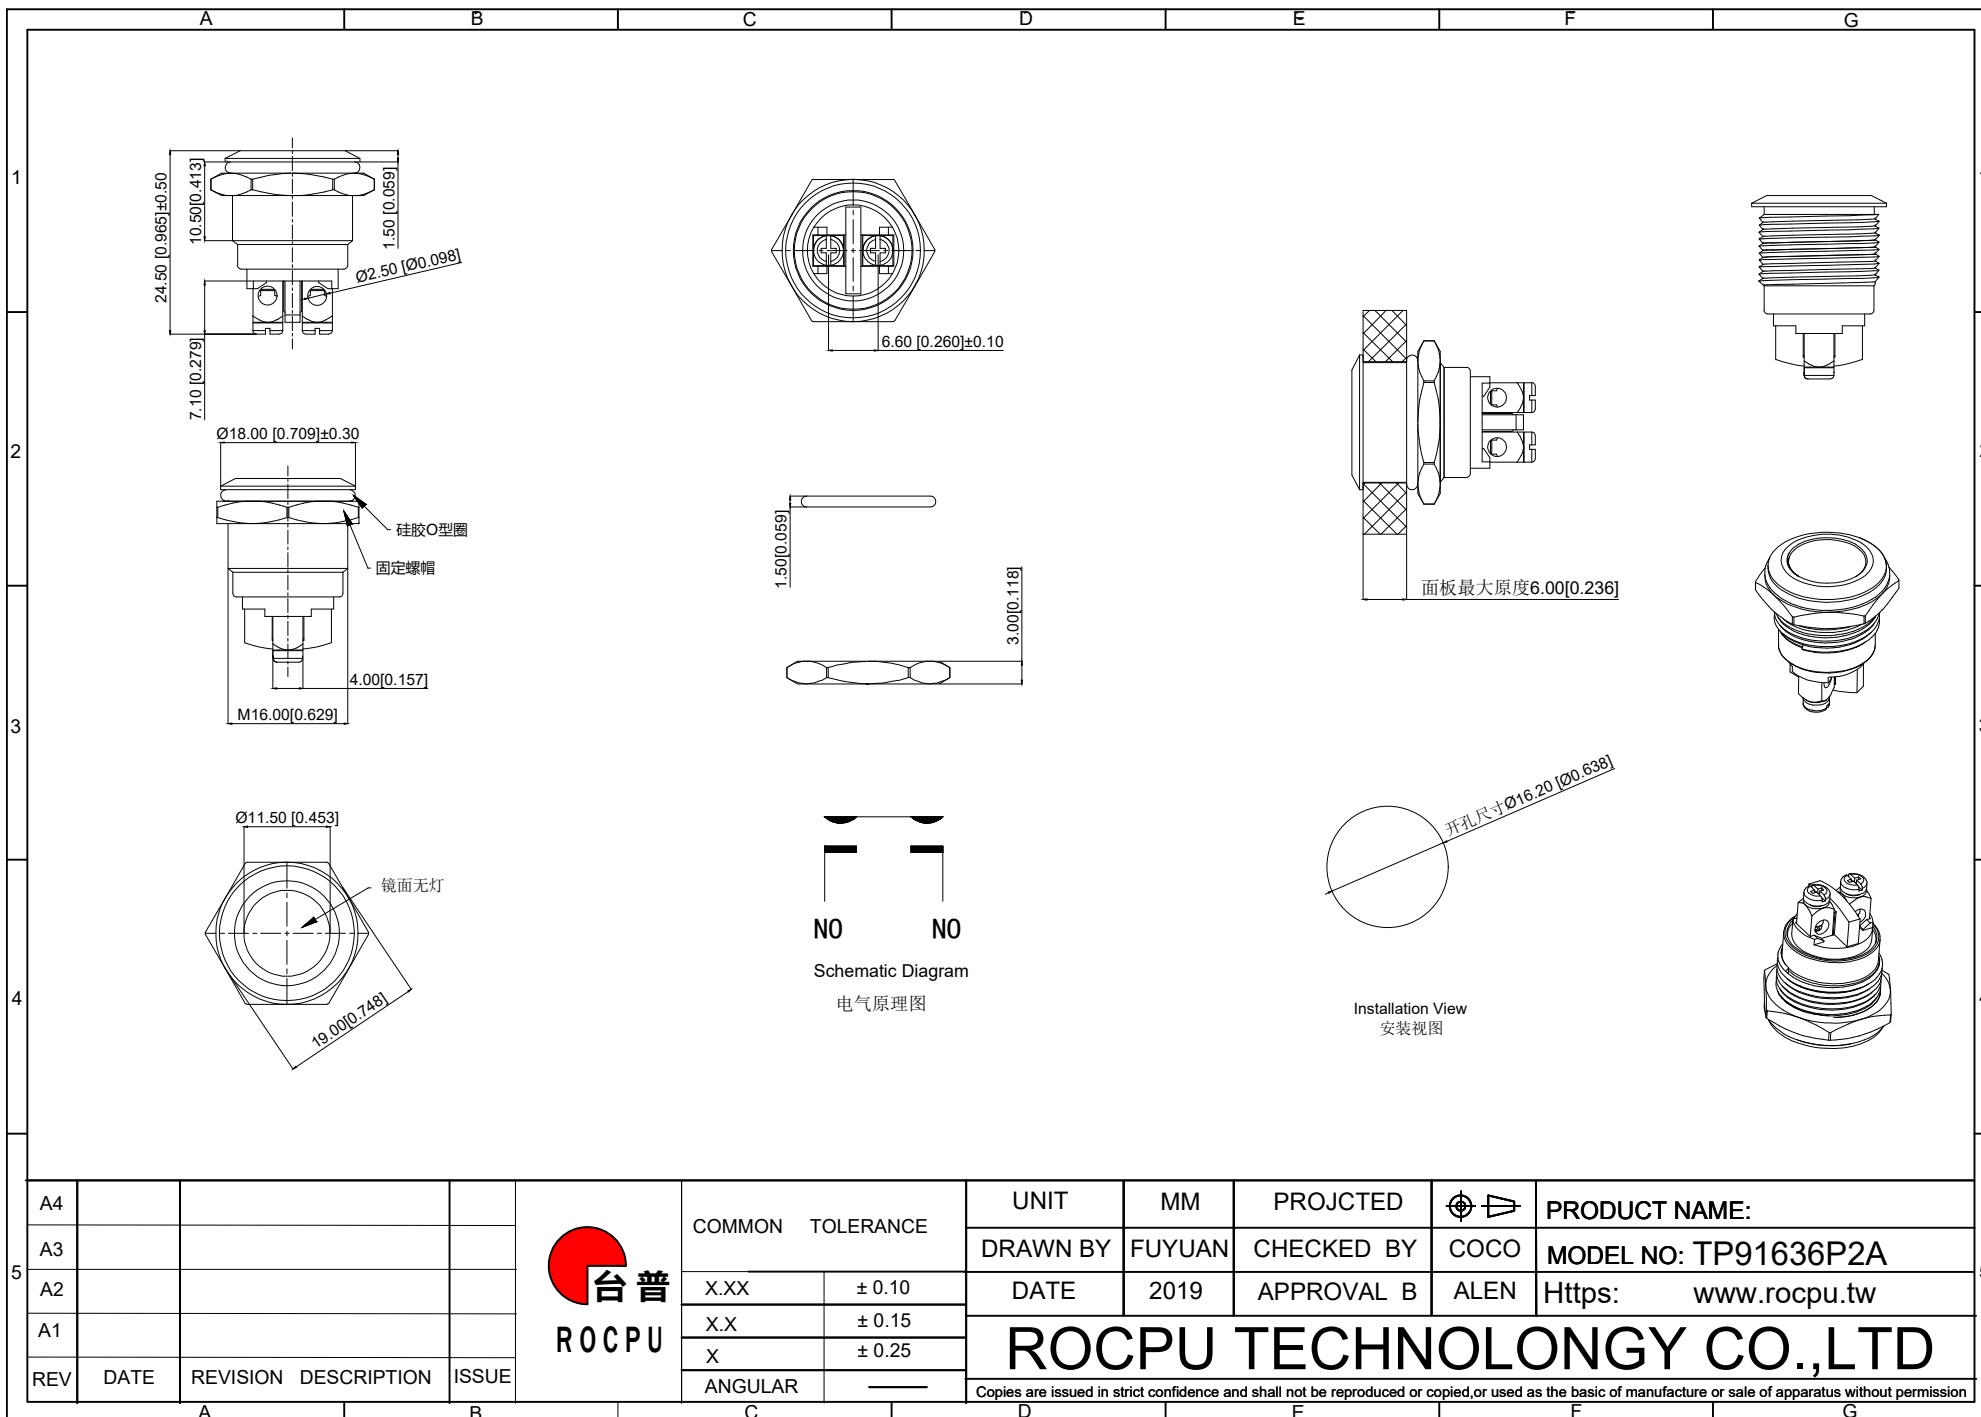

A		B		C		D		E		F		G	
1	性能参数												
	1. Heating current: Ui: AC250V, Ith: 5A 发热电流: Ui: AC250V, Ith: 5A						13. mechanical: 500000cycles 机械寿命: 500000cycles						
	2. Rated current:2A/DC36V 额定电流:2A/DC36V						14. Operation method:Self repeating form 操作方式: 自复式						
	3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ						15. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N						
	4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ												
	5. Pressing stroke:2.00mm ± 0.10 按压行程:2.00mm ± 0.10												
	6. Contact stroke:1.10mm±0.10 接触行程 :1.10mm±0.10												
	7. Nut assembly torque:5-14N 螺帽装配力矩:5-14N												
	8. Protection level:IP67 防护等级:IP67												
	9. Explosion prevention level: IK09 防暴等级: IK09												
2													
3													
4													
5													

A		B		C		D		E		F		G	
材质参数													
7		Base 底座		PA66		1		Baby blue 浅蓝色					
6		Pin 引脚		Brass 黄铜		1		Silvering 镀银					
5		Contact material 接触材质		silver alloy 银合金		1							
4		Arm nut 固定螺帽		Brass 黄铜		1		nickeling 镀镍					
3		Oring O型圈		Silica gel 硅胶		1							
2		Housing 外壳		Aluminum alloy 铝合金		1		Oxidized/Black 氧化/黑色					
1		Key 按键		Aluminum alloy 铝合金		1		Oxidized/Black 氧化/黑色					
NO 序号		Part name 部件名		Material 材料		QTY 数量		Remark 备注					

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91636P2A
A2					X.XX	± 0.10	DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw
A1					X.X	± 0.15	ROCPCU TECHNOLOGY CO.,LTD				
REV	DATE	REVISION	DESCRIPTION		ISSUE						
					ANGULAR	—	Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission				