


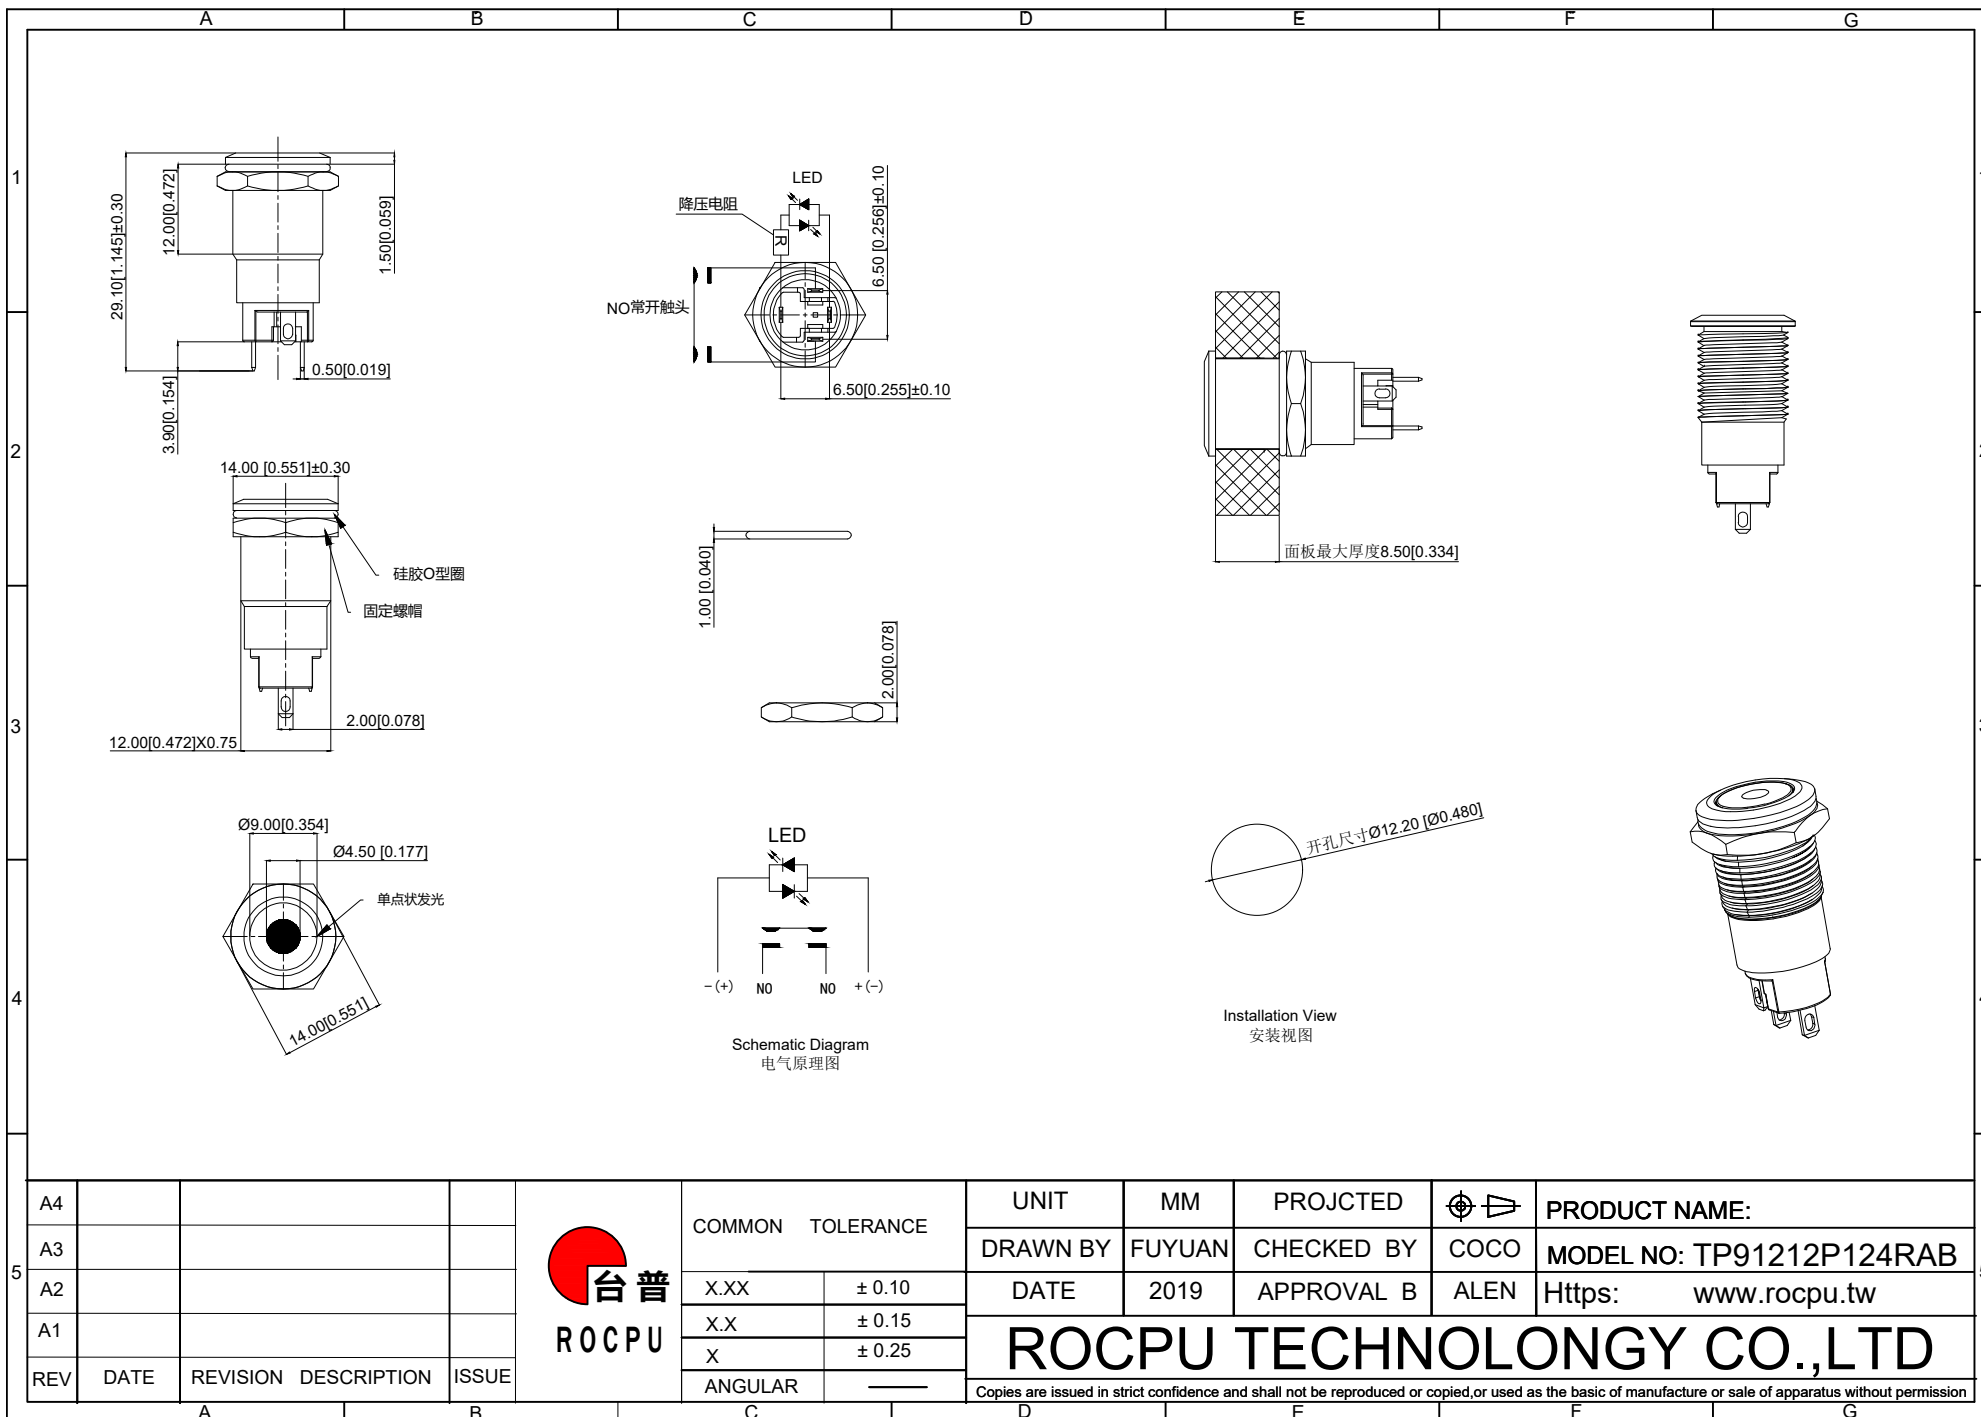

		A		B		C		D		E		F		G		
1	性能参数															
	1. Heating current: Ui: AC250V, Ith: 3A 发热电流: Ui: AC250V, Ith: 3A															
	2. Rated current:2A/DC36V 额定电流:2A/DC36V															
	3. Insulation resistance:≥1000MΩ 绝缘电阻 :≥1000MΩ															
	4. Contact resistance:≤50mΩ 接触电阻 :≤50mΩ															
	5. Pressing stroke:2.30mm ± 0.10 按压行程:2.30mm ± 0.10															
	6. Contact stroke:1.00mm±0.10 接触行程 :1.00mm±0.10															
	7. welding temperature: 320 ℃± 20 ℃ 焊接温度: 320 ℃± 20 ℃															
	8. Welding duration: Less than 3 seconds in duration 焊接时长: Less than 3 seconds in duration															
	9. Nut assembly torque:5-14N 螺帽装配力矩:5-14N															
	10. Protection level:IP65 防护等级:IP65															
2	11. Explosion prevention level: IK08 防暴等级: IK08															
	12. Working environment temperature: -20 ℃~+55 ℃ 工作环境温度: -20 ℃~+55 ℃															
	13. Compression torque: ≤ 3N 按压扭力: ≤3N															
	14. Electrical life: 500000 cycles 电气寿命: 500000 cycles															
	15. mechanical: 500000cycles 机械寿命: 500000cycles															
	16. Operation method:Self-locking 操作方式: 自锁式															
	17. NO reverse thrust foot torque: ≤30N NO反推脚扭力: ≤30N															
	18. LED lamp power consumption: 20m以下 LED灯功耗: 20m以下															
	19. LED lamp lifespan: 40000h LED寿命: 40000h															
	20. LED color: Red LED颜色: 红色															
	3															
4																
	5	A4				 台普 ROC PU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:			
A3												MODEL NO: TP91212P124RAB				
A2												Https: www.rocpu.tw				
A1																
REV		DATE	REVISION	DESCRIPTION	ISSUE											
		A		B		C		D		E		F		G		
Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission																

A		B		C		D		E		F		G	
材质参数													
10	luminous zone 发光区			PC 塑料			1						
9	LEDpin LED脚			Brass 黄铜			1		Silvering 镀银				
8	Base 底座			PA66			1		Black 黑色				
7	Pin 引脚			Brass 黄铜			1		gold-plating 镀金				
6	Contact material 接触材质			Silvering 镀银			1						
5	Base 基座			PA66			1		Black 黑色				
4	Arm nut 固定螺帽			Brass 黄铜			1		nickeling 镀镍				
3	Oring O型圈			Silica gel 硅胶			1						
2	Housing 外壳			Aluminum alloy 铝合金			1		Oxidized/Black 氧化/黑色				
1	Key 按键			Aluminum alloy 铝合金			1		Oxidized/Black 氧化/黑色				
NO 序号	Part name 部件名			Material 材料			QTY 数量		Remark 备注				

A4				 台普 ROCPCU	COMMON TOLERANCE		UNIT	MM	PROJECTED		PRODUCT NAME:		
A3							DRAWN BY	FUYUAN	CHECKED BY	COCO	MODEL NO: TP91212P124RAB		
A2					DATE	2019	APPROVAL B	ALEN	Https: www.rocpcu.tw				
A1					ROCPCU TECHNOLOGY CO.,LTD								
REV	DATE	REVISION	DESCRIPTION									ISSUE	
					ANGULAR				Copies are issued in strict confidence and shall not be reproduced or copied,or used as the basic of manufacture or sale of apparatus without permission				
A		B		C		D		E		F		G	