

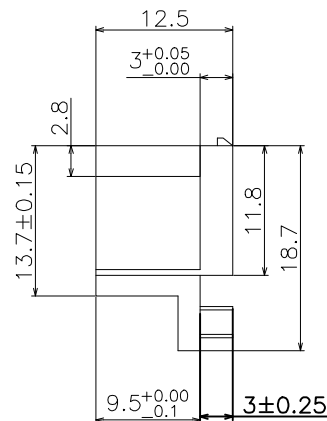
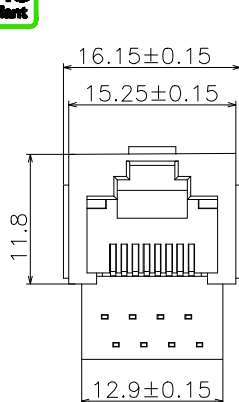


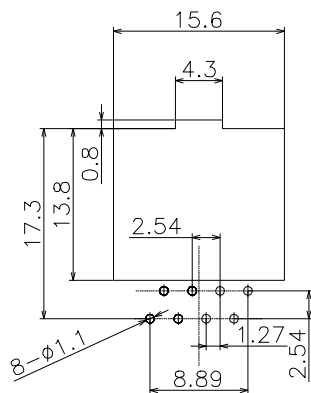


**General Specification**  
Current Rating:1.5A DC /Contact, 20mA DC for LED signals  
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals  
Operating Environment  
Standard Temperature: -20℃~+70℃  
Industrial Temperature: -40℃~+85℃  
Humidity: 20~70%  
Contact Resistance:≤30mΩ  
Insulation Resistance:≥500MΩ  
Dielectric Strength:500V AC/(50HZ)/Min  
Mating And Unmating Force:3~20N  
Durability:750 Cycles Min

**Material Specification**  
Housing :Thermo-plastic, UL94V-0.  
Contact :Alloy Copper  
Shield :Alloy Copper  
Please refer to the customer drawing when customer has specified



PCB LAYOUT



|    |    |                 |    |       |    |
|----|----|-----------------|----|-------|----|
| 3  | 后盖 | PBT             | 1  | GREY  |    |
| 2  | 插针 | PHOSPHOR BRONZE | 8  | "3U"  |    |
| 1  | 塑座 | PBT             | 1  | GREY  |    |
| 序号 | 名称 | 材料              | 数量 | 镀层/颜色 | 备注 |

网络插座外形图



温州瑞川电子有限公司  
WEN ZHOU RUI CHUAN ELECTRONIC CO.,LTD.

绘图: 吴飞 日期: 2022.4.13  
审核: 日期:  
核准: 日期:

|       |       |         |                             |         |        |
|-------|-------|---------|-----------------------------|---------|--------|
| 一般公差  | 品名:   | RJ45 灰色 |                             |         |        |
| 90~   | ±0.25 | 料号:     | SP18-80000003PJ30 (WR02408) |         |        |
| 10~30 | ±0.20 | 型号:     | RJ45                        | 图号:     |        |
| ~10   | ±0.15 | 版本:     | 单位:mm                       | 比例: 1:1 | 纸张: A4 |
| 角度:   | ±2°   | 页面:     | 1 of 1                      |         |        |

A/0

新出版发行

版次

变更履历

变更单号

绘制

日期

核准

日期

1

2

3

该图面供温州瑞川电子有限公司内部使用,不得私自复印