
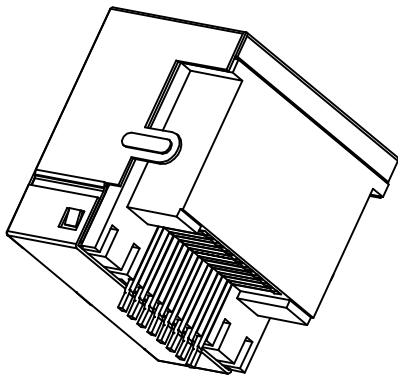
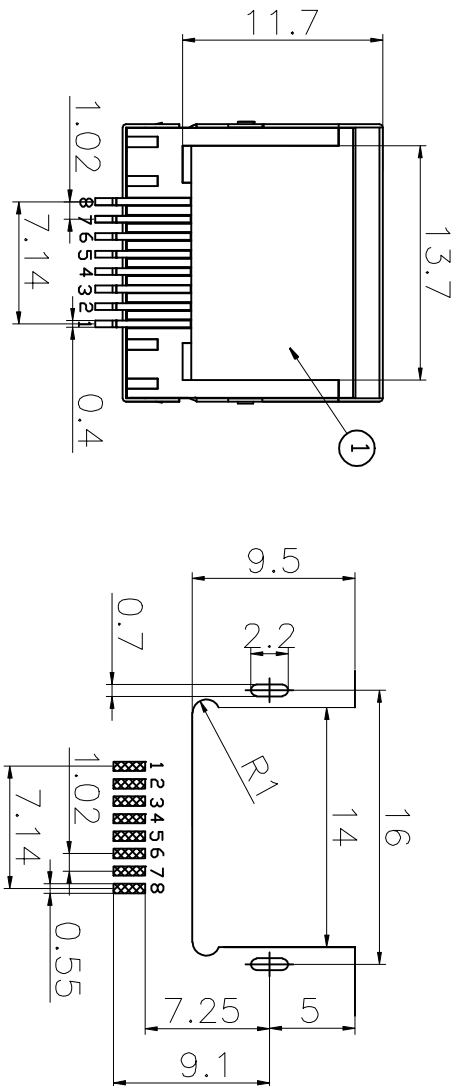


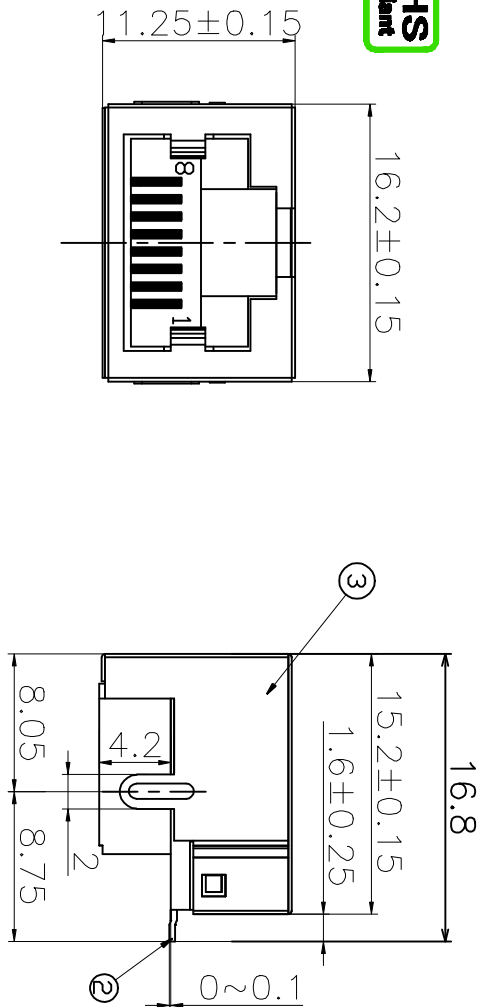

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

PCB LAYOUT
RECOMMENDED

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

X=2.8/4.2			
3	外壳	H62	1
2	插针	PHOSPHOR BRONZE	8
1	塑座	LCP	1
序号	名称	材料	数量
			镀层/颜色
			备注

绘图: 日期:

审核: 日期:

批准: 日期:

品名: RCH-SP-32-TP(无灯无弹) 4.2

料号: SP32TP-800020011B16 (RC01836)

型号: RJ45 图号:

版本: 1 of 1 单位:mm 比例: 1:1 纸张: A4

1	2	3	变更单号	绘制日期	核准日期
1	2	3	变更履历	该图面供温州瑞川电子有限公司内部使用,不得私自复印	
A/0	新出版发行				
版本					