
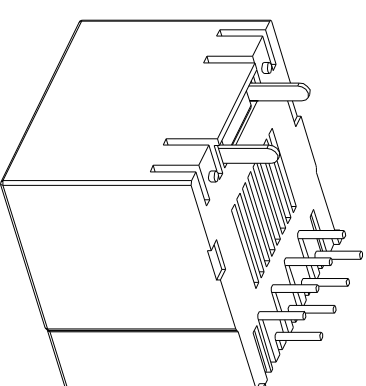
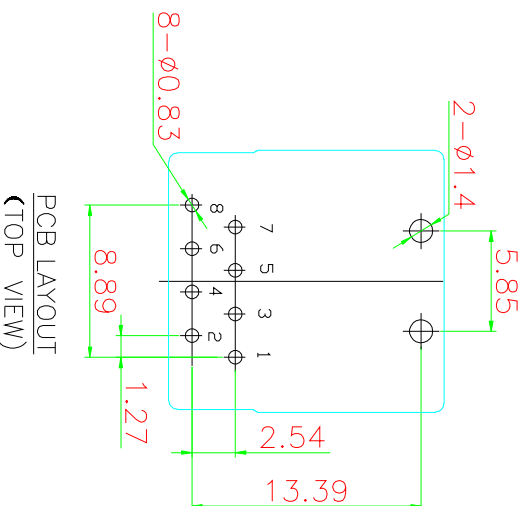



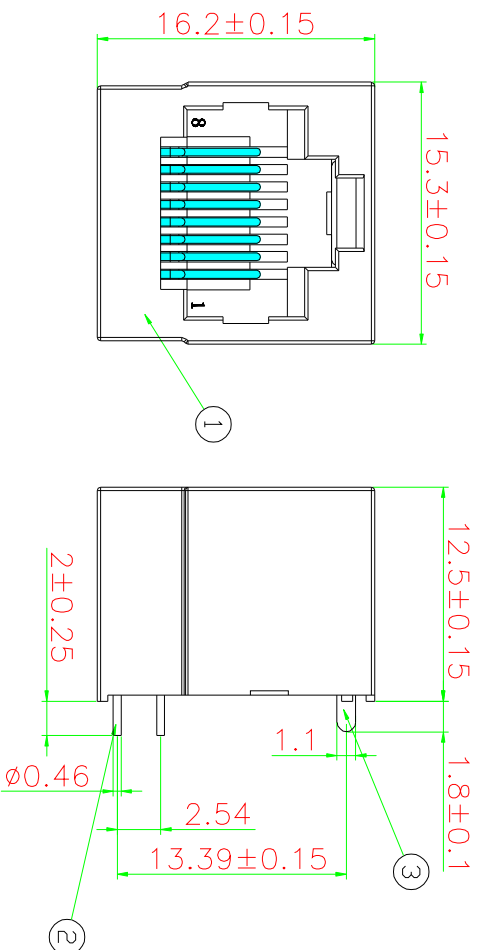

General Specification
Current Rating: 1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating: 125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance: ≤30mΩ
Insulation Resistance: ≥500MΩ
Dielectric Strength: 500V AC/(50HZ)/Min
Mating And Unmating Force: 3~20N
Durability: 750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

3	定位片	H62	1	CT	
2	插针	PHOSPHOR BRONZE	8	1U"	
1	塑座	PA46	1	BLACK	
序号	名称	材料	数量	镀层/颜色	备注

绘图:	吴鹏飞	日期:	2022.4.8	一般公差		品名:	RC11-52-42-CB(无灯全塑)无翘脚带定位脚			
审核:	陈清德	日期:		30~	±0.25	料号:	5242CB-80000011AB25 (RC01927)			
				10~30	±0.20	型号:	RJ45			
				~10	±0.15	图号:				
核准:	陈华光	日期:		角度:	±2°	版本:	单位:mm	比例: 1:1	纸张: A4	

变更单号	绘制	日期	核准	日期
变更履历	绘制	日期	核准	日期
版本	绘制	日期	核准	日期
1	1			