

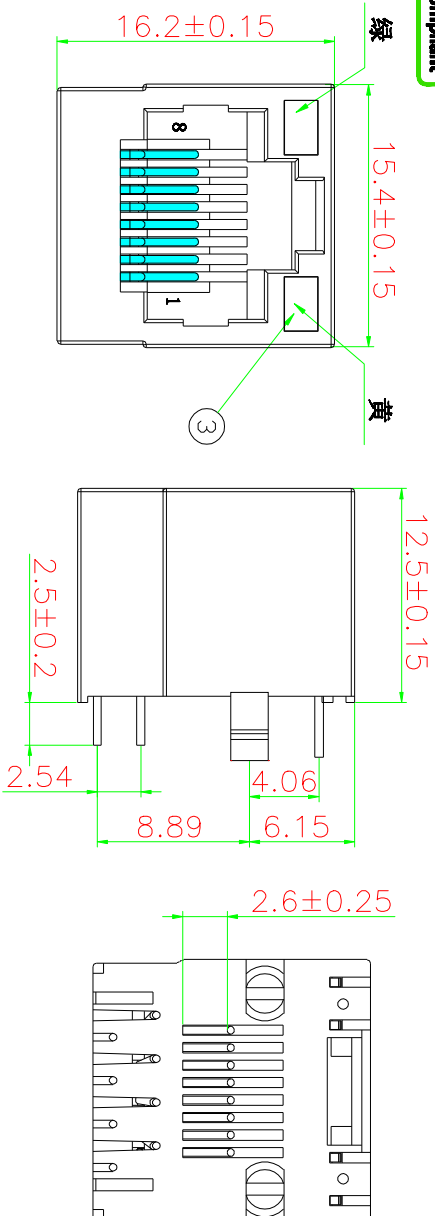


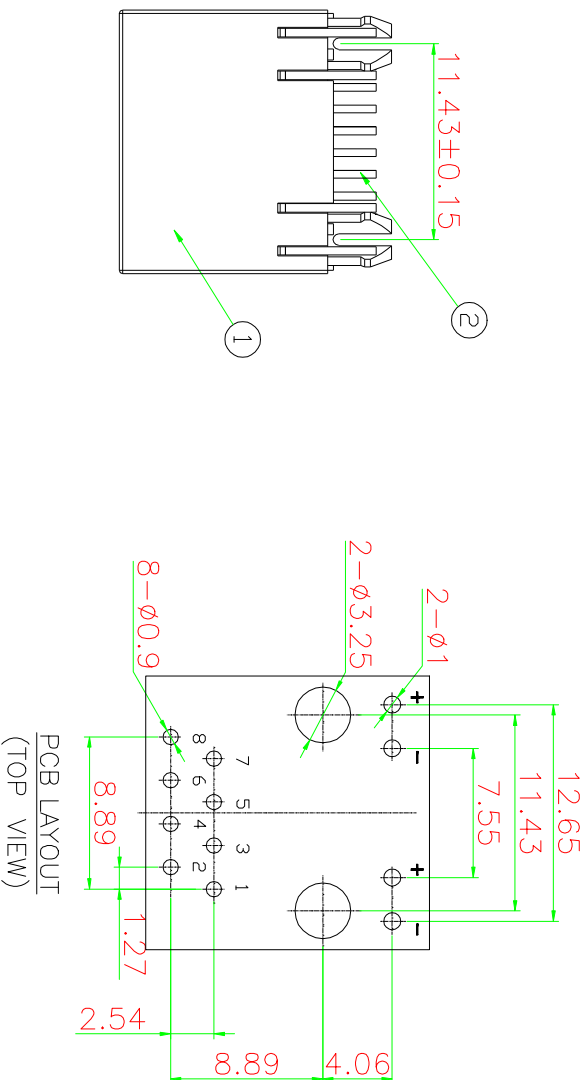

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ) /Min
Mating And Umating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

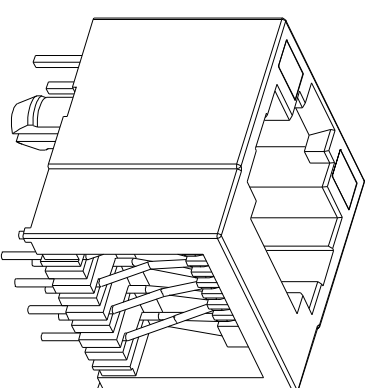

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

图号	日期	审核	日期	审核	日期
2022.4.8					
30~	±0.25	品名:	RGH-52-42-CB(带灯全塑)绿黄 正负	料号:	5242CB-8GY00010AB25 (WR01929)
10~30	±0.30	料号:		型号:	RJ45
~10	±0.15	角度:	±2°	图号:	
页面:	1 of 1	版本:		单位:mm	比例: 1:1