

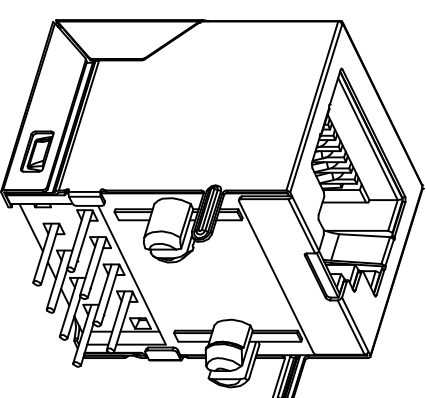
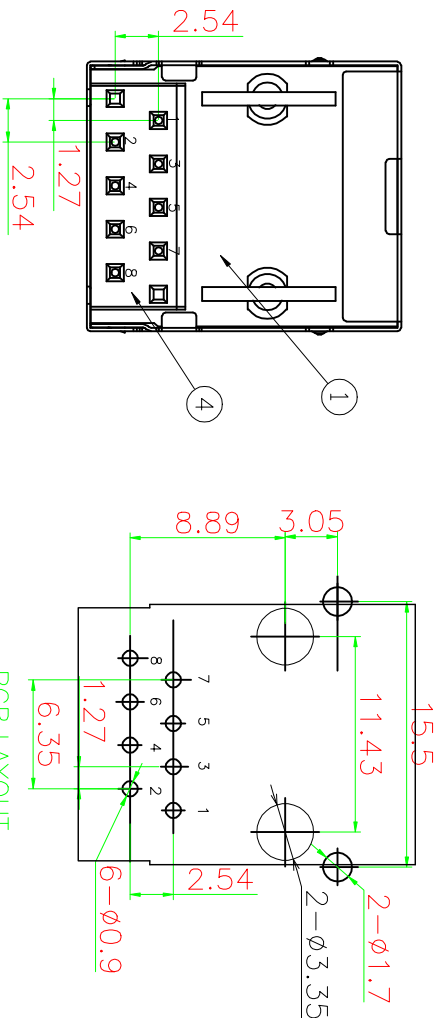


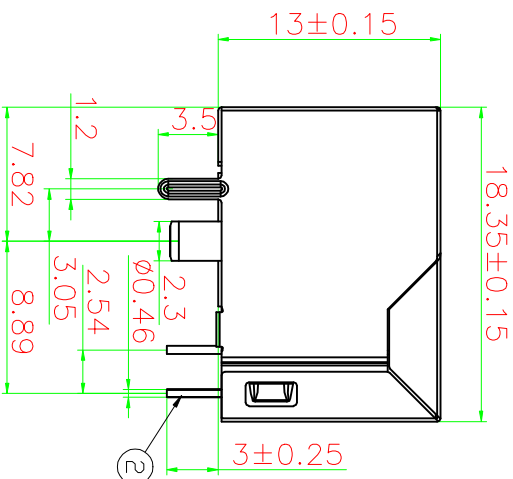

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ) /Min
Mating And Unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

网络插座外形图

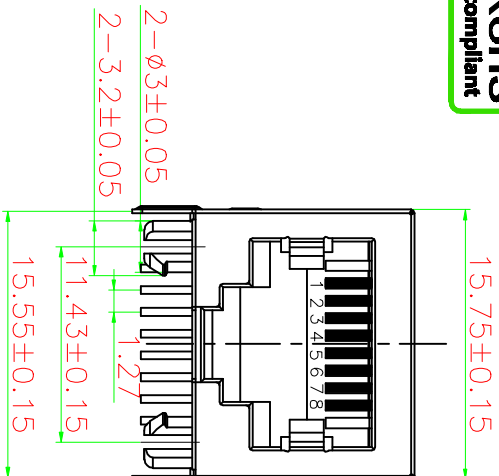

温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

序号	名称	材料	数量	镀层/颜色	备注
4	后盖	PA46	1	BLACK	
3	外壳	HB2	1	NI	
2	插针	PHOSPHOR BRONZE	8	FU	
1	塑座	PA46	1	BLACK	

一般公差	品名	RCR-56-04(无弹10P8C)
30~	±0.20	
10~30	±0.20	料号: 5604-80002010AB30 (RC02862)
~10	±0.15	型号: RJ45
角度:	±2°	图号:
页面: 1 of 1	版本:	单位:mm

A/0

新出版发行

变更履历

变更单号

绘制

日期

审核

日期

1

2

3

该图面供温州瑞川电子有限公司内部使用,不得私自复印

该图面供温州瑞川电子有限公司内部使用,不得私自复印