


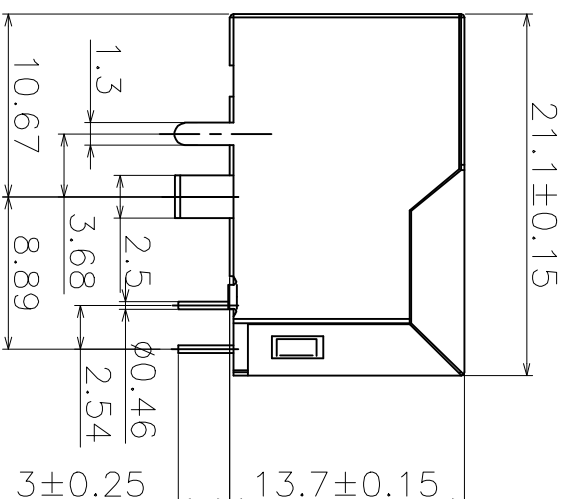

General Specification

Current Rating:1.5A DC /Contact, 20mA DC for LED signals

Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals

Operating Environment

Standard Temperature: -20℃~+70℃

Industrial Temperature: -40℃~+85℃

Humidity: 20~70%

Contact Resistance:≤30mΩ

Insulation Resistance:≥500MΩ

Dielectric Strength:500V AC/(50HZ)/Min

Mating And Unmating Force:3~20N

Durability:750 Cycles Min


Material Specification

Housing :Thermo-plastic, UL94V-0.

Contact :Alloy Copper

Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

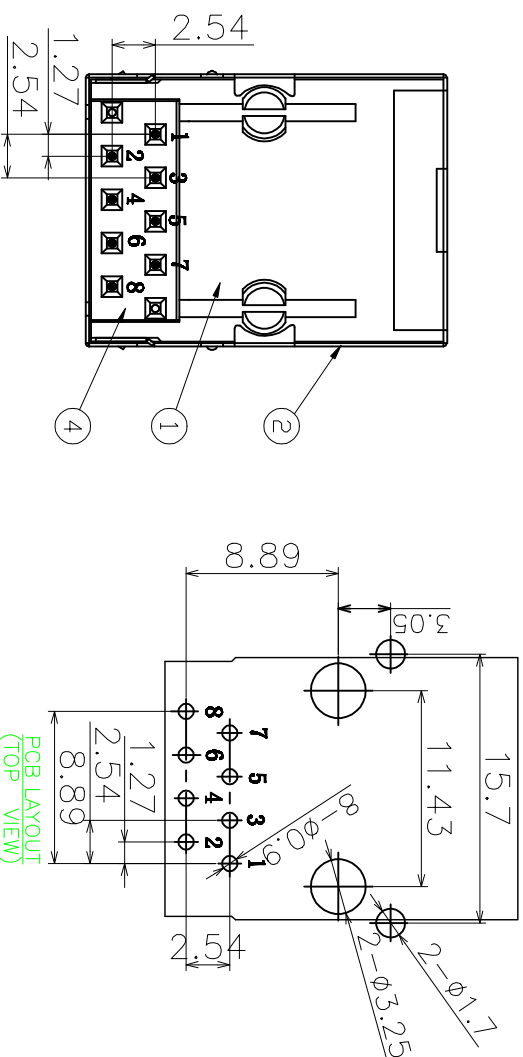

网络插座外形图

序号	名称	材料	数量	键层/颜色	备注
4	后盖	PA46	1	BLACK	
3	插针	PHOSPHOR BRONZE	8	"FU"	
2	外壳	H62	1	NT	
1	塑座	PA46	1	BLACK	



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

一般公差		品名:		RCH-59-01(无灯无弹前射3.68)	
30~	±0.25	料号:		5901-80004010AB30 (WR00231)	
10~30	±0.20	型号:		RJ45	
~10	±0.15	图号:			
角度:	±2°	单位:mm		比例:1:1	
页面: 1 of 1	版本:	纸张:A4			