

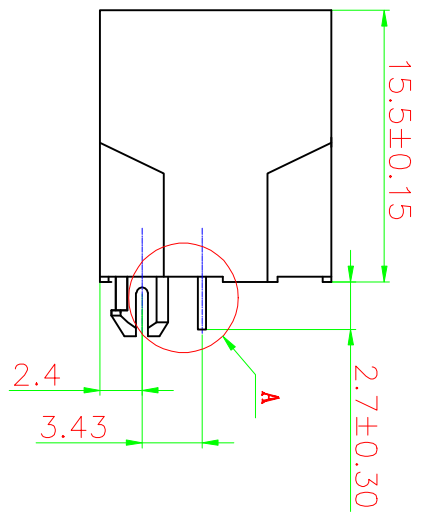
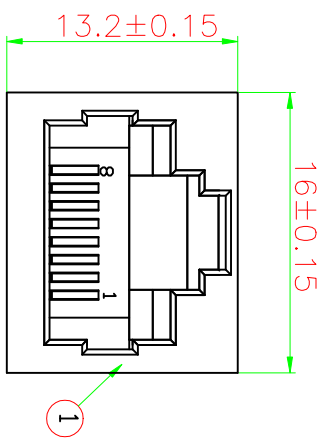
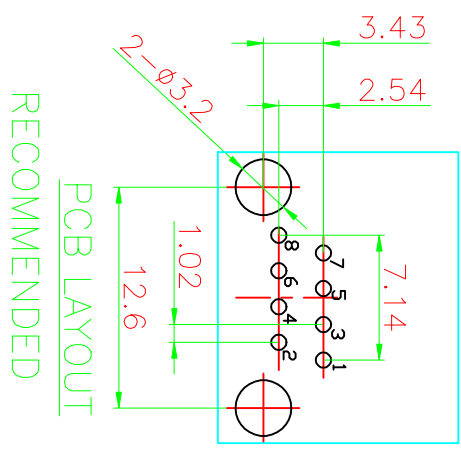


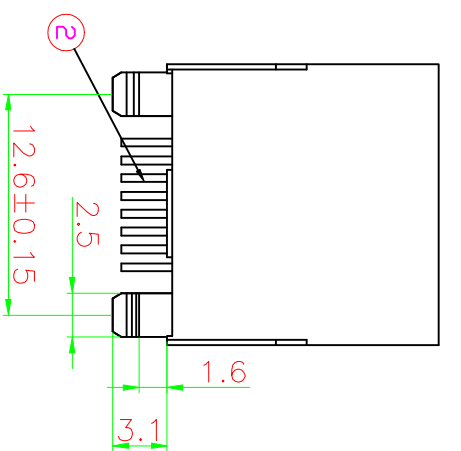


General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Umating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

插针



PCB LAYOUT
RECOMMENDED

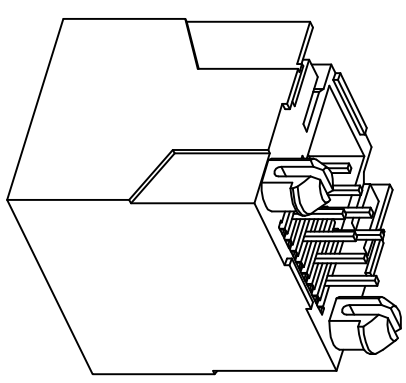

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

品名: RCH-5681-M(无灯全塑)
料号: 5681M-80000011AB27 (WR40072)
型号: RJ45
图号:

一般公差: ±0.40
>10~30 ±0.50
~10 ±0.30
角度: ±5°
版本: 1 of 1
单位:mm
比例: 1:1
纸张: A4

禁止在图面上			
版次	A/0		
1	新出版发行		
2			
3			
变更履历		变更单号	绘制日期
该图面			