

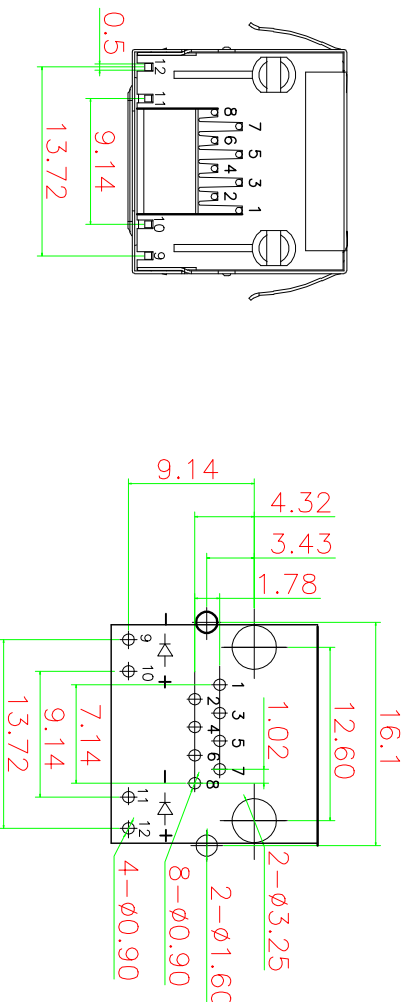
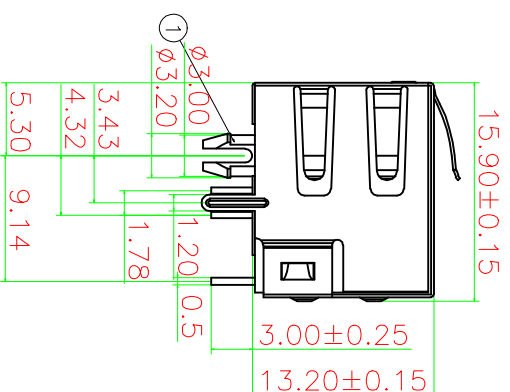


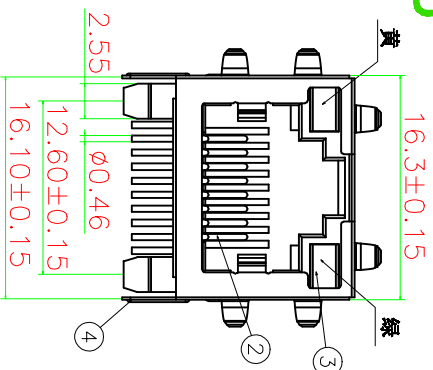

PCB LAYOUT
RECOMMENDED



General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+65℃
Humidity: 20~70%
Contact Resistance: ≤30mΩ
Insulation Resistance: ≥500MΩ
Dielectric Strength: 500V AC/(50HZ)/Min
Withstanding Force: 3~20N
Durability: 750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

网络插座外形图



温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

序号	名称	材料	数量	镀层/颜色	备注
4	外壳	HO2	1	NI	
3	LED灯	树脂/FE	2	NI/AG	
2	插针	PHOSPHOR BRONZE	8	FUT	
1	塑座	PA46	1	BLACK	

绘图:	吴家飞	日期:	2022.6.21
审核:	陈伟	日期:	
批准:	陈伟	日期:	

品名:	网络插座
料号:	5631-8YGG2410AB30 (RC00969)
型号:	RJ45
图号:	

公差:	±0.25	版本:	1 of 1
角度:	±0.15	单位:	mm
比例:	1:1	纸张:	A4

温州瑞川电子有限公司

版本: A/0

变更履历