

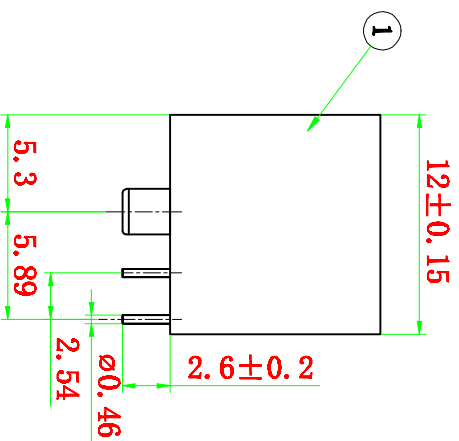
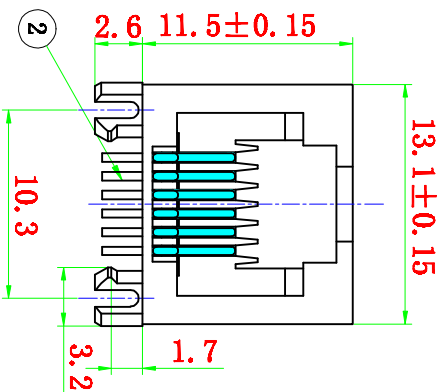


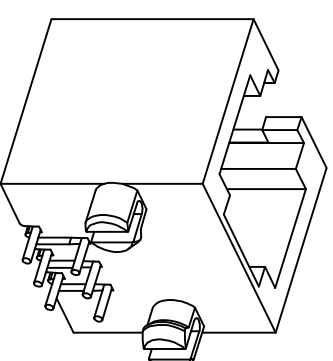

General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance:≤30mΩ
Insulation Resistance:≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper
Please refer to the customer drawing when customer has specified

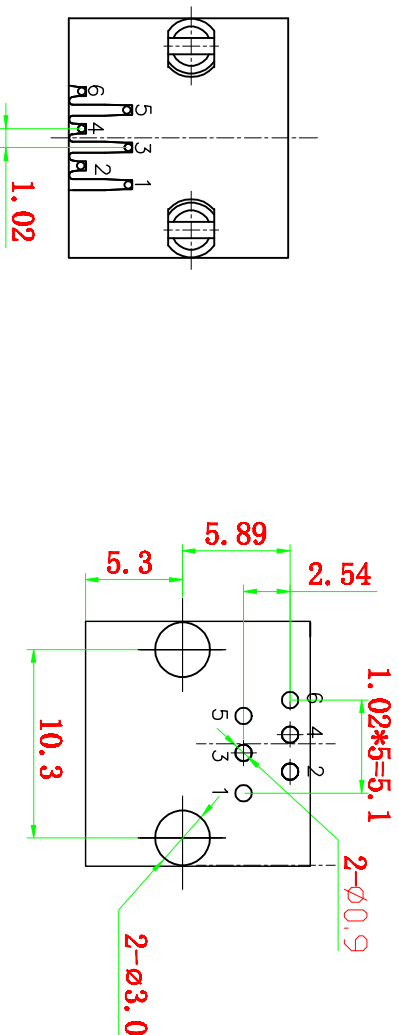

PCB LAYOUT

网络插座外形图

2	插针	PHOSPHOR BRONZE	6	PL	
1	塑座	PBT	1	GREY	
序号	名称	材料	数量	镀层/颜色	备注

 温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD.

0		一般公差		品名:		RCR-53-11全塑(6P9C)	
30~	±0.20	料号:	5311-60000010PJ26 (WR42063)				
10~30	±0.50	型号:	RJ45				
~10	±0.15	图号:					
角度:	±2°	单位:mm	比例: 1:1	纸源: A4			
页面:	1 of 1						
版本:							