




General Specification
Current Rating:1.5A DC /Contact, 20mA DC for LED signals
Voltage Rating:125V AC /Contact, 2.0 volts DC for LED signals
Operating Environment
Standard Temperature: -20℃~+70℃
Industrial Temperature: -40℃~+85℃
Humidity: 20~70%
Contact Resistance: ≤30mΩ
Insulation Resistance: ≥500MΩ
Dielectric Strength:500V AC/(50HZ)/Min
Mating And Unmating Force:3~20N
Durability:750 Cycles Min

Material Specification
Housing :Thermo-plastic, UL94V-0.
Contact :Alloy Copper
Shield :Alloy Copper

Please refer to the customer drawing when customer has specified

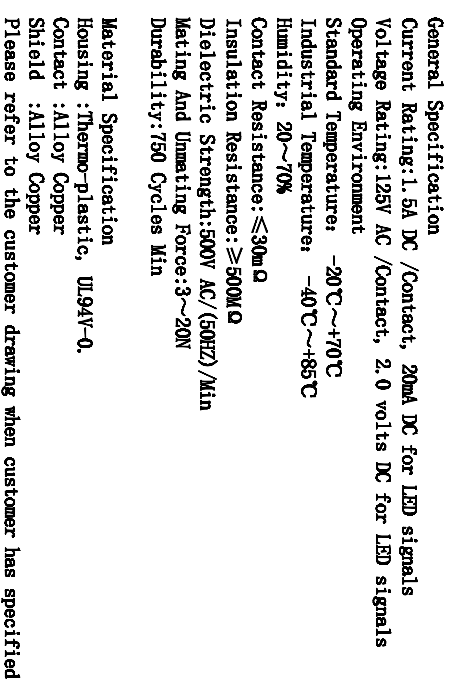

温州瑞川电子有限公司
WEN ZHOU RUI CHUAN ELECTRONIC CO., LTD

序号	名称	材料	数量	镀层颜色	备注
4	插针	PHOSPHOR BRONZE	32	"Pb"	
3	屏蔽	H62	1	NI	
2	后盖	PA46	4	BLACK	
1	塑座	PA46	1	BLACK	

绘图:	日期:	一般公差		品名:	RCH-5621 14(无弹) 无背脚			
审核:	日期:	30~	±0.25	料号:	562114-80002010AB33 (RC00992)			
		10~30	±0.20	型号:	RJ45			
核准:	日期:	~10	±0.15	图号:				
		角度:	±2°	单位:mm	比例: 1:1	纸样: A4		