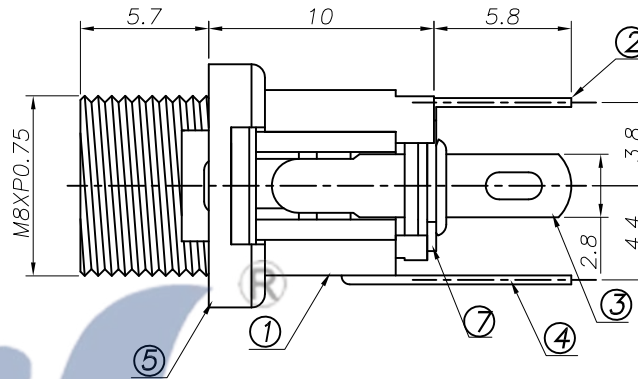
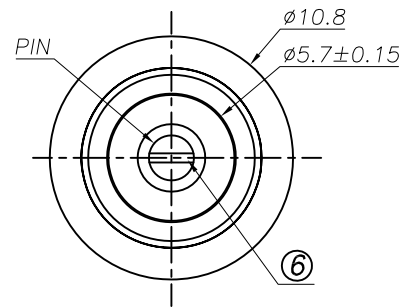
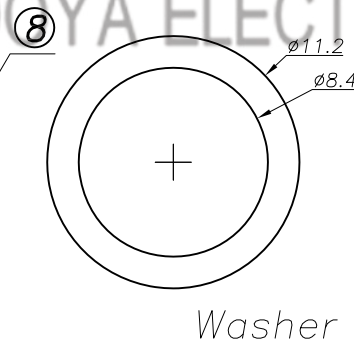
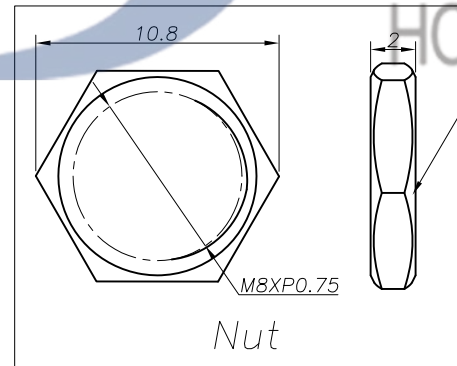
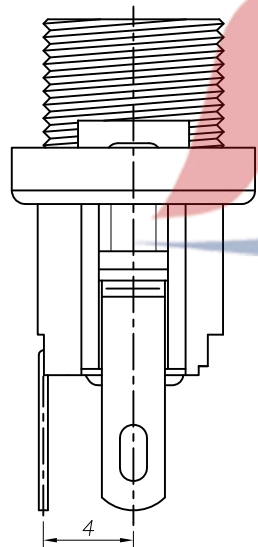



P.C.B Layout
(Copper-sided view)

- SPECIFICATION**
1. Rating : 30V 3.0A;
 2. Contact resistance: $\leq 30m\Omega$;
 3. Insulation resistance: $\geq 100M\Omega$ (DC250V);
 4. Withstand voltage: 500VAC ;
 5. Insertion and extraction force: 3-30N;
 6. life test: 5,000 cycles.

PIN	2.0	2.35	2.5
APPD.	✓		

9	Washer-2	SPCC	1	Ni-Plating	TOLERANCE UNLESS SPECIFIED UP TO 5mm: ± 0.1 ANGULAR 1 ABOVE 5mm: ± 0.2 $\pm 1^\circ$					REVISIONS NO DATE BY APPD		
8	Nut	Brass	1	Ni-Plating								
7	Washer-1	Bakelite	2									
6	Pin	Bronze	1	Ni-Plating	TITLE: DC JACK UNIT : MM MODEL: DC-025M2.5 SCALE: 1:1					ROHS COMPLIANT DWN CHK'D APPD		
5	Bushing	Brass	1	Ni-Plating								
4	Shunt Terminal	Brass	1	Cu-Sn-Plating	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司					PRO.AGL: REV :A0		
3	Tip Spring	Phosphor bronze	1	Cu-Sn-Plating								
2	Center pin terminal	Brass	1	Cu-Sn-Plating	HAOYU(HONGKONG)LIMITED 皓宇(香港)有限公司					PRO.AGL: REV :A0		
1	Housing	PA66	1	Black								
NO.	PART NAME	MATERIAL	QTY	FINISHING								