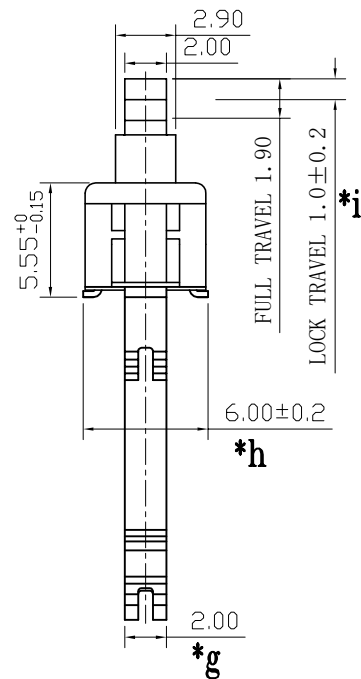
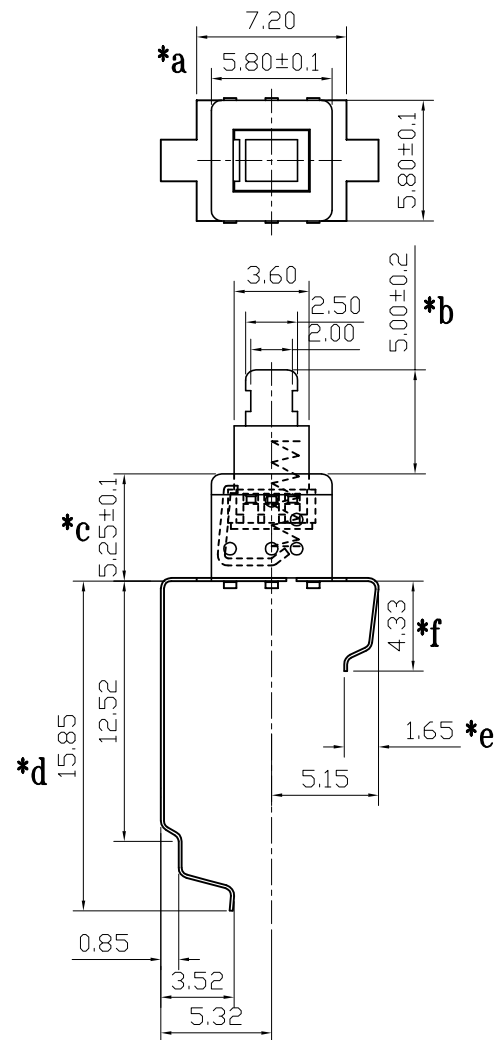



SCHEMATIC

SPECIFICATION

- 1.Rating: DC 12V 0.3A.
- 2.Function: 2P2T
- 3.Contact resistance: $\leq 100m\Omega$.
- 4.Insulation resistance: $\geq 100M\Omega$ (DC250V).
- 5.Withstanding voltage: 250VAC.
- 6.Operating Force: 250±100gf (依客户需求而定).
- 7.Life test: 10,000 cycles.
- 8.Sign"* "is importance dimension.

9	CONTACTPIECE-2	SUS	1		TOLERANCE UNLESS SPECIFIED										
8	CONTACTPIECE-1	SUS	1												
7	TERMINAL	BRASS STRIP	6	Ag PLATED											
6	CASE	PA66	1	GRAY	<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	AO	2024.5.2	初次发行			TQF			
5	LOCK PIN	SUS WIRE	1				NO	DATE	REVISIONS			BY	APPD		
4	SPRING	SUS WIRE	1		TITLE: PUSH SWITCH				UNIT : MM	ROHS	DWN				
3	CONTACT	BRONZE	2	Ag PLATED	MODEL: PB-22E60-S-E-DCP				SCALE: 1:1	COMPLIANT	CHK'D				
2	KNOB	PBT	1	WHITE	DONGGUANG HAOYU ELECTRONICS CO., LTD 皓宇 HAOYU 东莞市弘皓电子有限公司								APPD		
1	COVER	PPA	1	BLACK									PRO.AGL: 		
NO.	PART NAME	MATERIAL	QTY	FINISHING											