

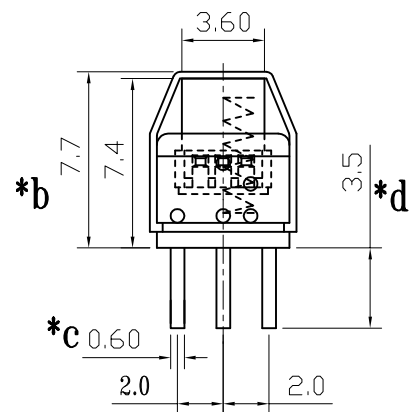


① ② ③
④ ⑤ ⑥






SCHEMATIC

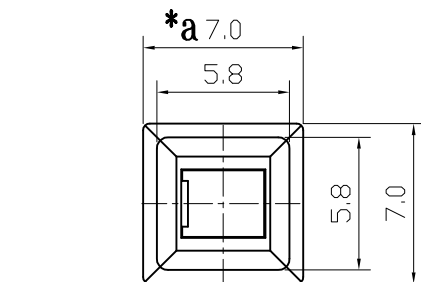

① ② ③



④ ⑤ ⑥

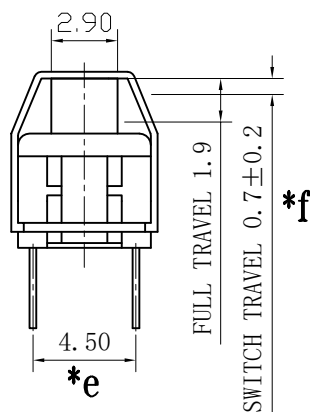

P.C.B LAYOUT

SPECIFICATION

- 1.Rating: DC 12V 0.3A.
- 2.Function: 2P2T
- 3.Contact resistance: $\leq 100m\Omega$.
- 4.Insulation resistance: $\geq 100M\Omega$ (DC250V).
- 5.Withstanding voltage: 250VAC .
- 6.Operating Force: $250\pm 100gf$ (依客户需求而定) .
- 7.Life test: 10,000 cycles.
- 8.Sign"* "is importance dimension.

				TOLERANCE UNLESS SPECIFIED											
7	HAT	SILICA GEL	1	TDRANSPARENT											
6	TERMINAL	BRASS	6	Ag PLATED	<1.5: ±0.1mm >1.5~5.0: ±0.25mm >5.0: ±0.3mm	ANGULAR ±1°	A0	2024.5.2	初次发行			TQF			
5	CASE	PA66	1	GRAY			NO	DATE	REVISIONS			BY	APPD		
4	SPRING	SUS WIRE	1	NATURAL	TITLE: PUSH SWITCH			UNIT : MM		ROHS	DWN				
3	CONTACT	BRONZE	2	Ag PLATED	MODEL: PB-22E64-N-E-GJ			SCALE: 1:1		COMPLIANT	CHK'D				
2	KNOB	PBT	1	WHITE	 DONGGUANG HAOYU ELECTRONICS CO., LTD 东莞市弘皓电子有限公司					APPD					
1	COVER	PPA	1	BLACK											
NO.	PART	NAME		MATERIAL	QTY	FINISHING							PRO.AGL:	 	REV :A0