
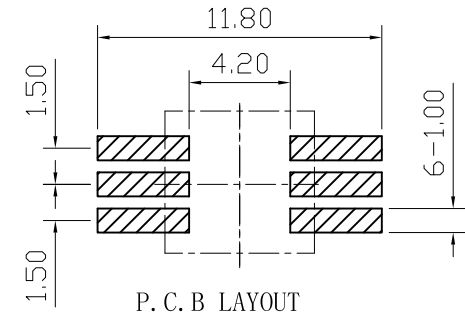

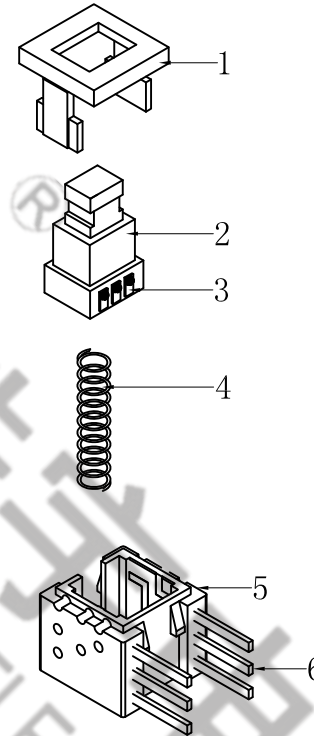
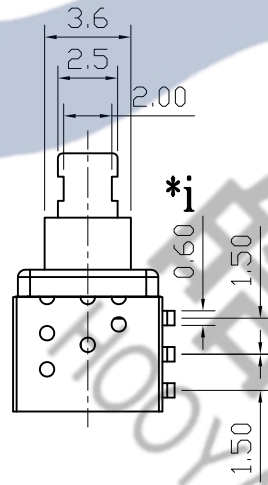


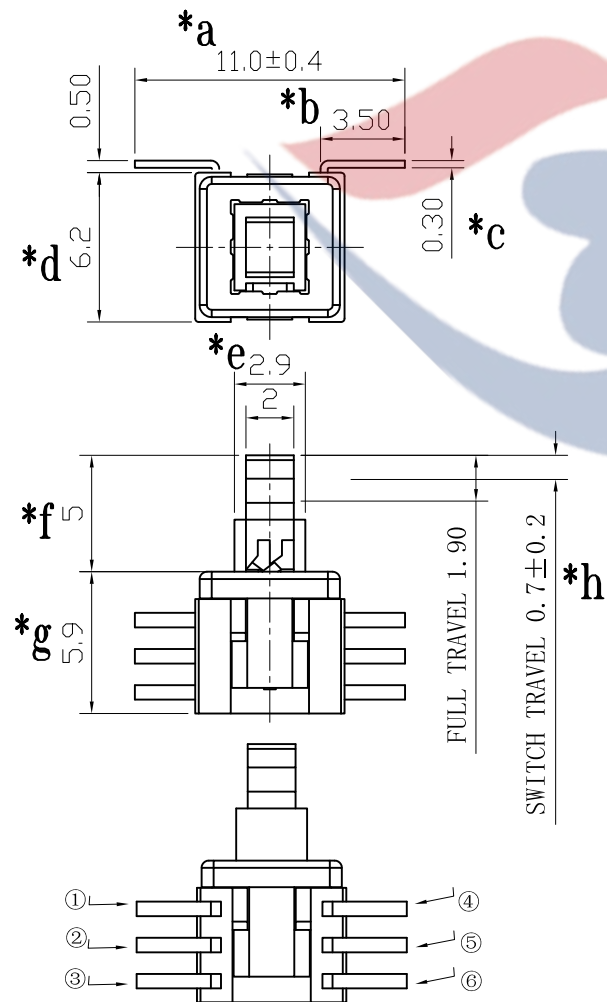

## SPECIFICATION

- 1.Rating: DC 12V 0.3A.
- 2.Function: 2P2T
- 3.Contact resistance:  $\leq 100m\Omega$ .
- 4.Insulation resistance:  $\geq 100M\Omega$  (DC250V).
- 5.Withstanding voltage: 250VAC .
- 6.Operating Force: 180±80gf
- 7.Life test: 10,000 cycles.
- 8.Sign"\* "is importance dimension.

|     |           |          |     | TOLERANCE<br>UNLESS SPECIFIED |                                                                                                |                |                                                     |          |                |                                                                                       |         |
|-----|-----------|----------|-----|-------------------------------|------------------------------------------------------------------------------------------------|----------------|-----------------------------------------------------|----------|----------------|---------------------------------------------------------------------------------------|---------|
| 6   | TERMINAL  | BRASS    | 6   | Ag PLATED                     | <1.5: ±0.1mm<br>>1.5~5.0: ±0.25mm<br>>5.0: ±0.3mm                                              | ANGULAR<br>±1° | A0                                                  | 2024.5.2 | 初次发行           | TQF                                                                                   |         |
| 5   | CASE      | PPA      | 1   | GRAY                          |                                                                                                |                | NO                                                  | DATE     | REVISIONS      | BY                                                                                    | APPD    |
| 4   | SPRING    | SUS WIRE | 1   | NATURAL                       | TITLE: PUSH SWITCH                                                                             |                | UNIT : MM                                           |          | ROHS COMPLIANT | DWN                                                                                   |         |
| 3   | CONTACT   | BRONZE   | 2   | Ag PLATED                     | MODEL: PB-22E60R-N-C-SMT                                                                       |                | SCALE: 1:1                                          |          | CHK'D          |                                                                                       |         |
| 2   | KNOB      | PPA      | 1   | WHITE                         |  皓宇 HAOYU |                | DONGGUANG HAOYU ELECTRONICS CO., LTD<br>东莞市弘皓电子有限公司 |          | APPD           |                                                                                       |         |
| 1   | COVER     | PPA      | 1   | BLACK                         |                                                                                                |                |                                                     |          | PRO.AGL:       |  | REV :A0 |
| NO. | PART NAME | MATERIAL | QTY | FINISHING                     |                                                                                                |                |                                                     |          |                |                                                                                       |         |