



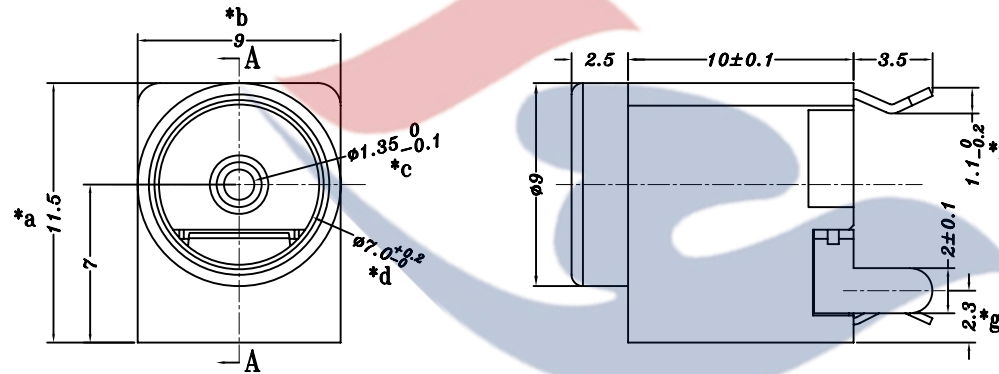


Specification:

1. Rating : DC 26.5V 3A.
2. Contact resistance: $\leq 50\text{m}\Omega$.
3. Insulation resistance: $\geq 100\text{M}\Omega$ (250VDC).
4. Withstanding voltage: 500VAC.
5. Insertion and extraction force: 3N~30N.
6. life test: 5000cycles min.
7. Operation temperature range: $-25^{\circ}\text{C} \sim 70^{\circ}\text{C}$.



"*"重点尺寸管控。




SCHEMATIC

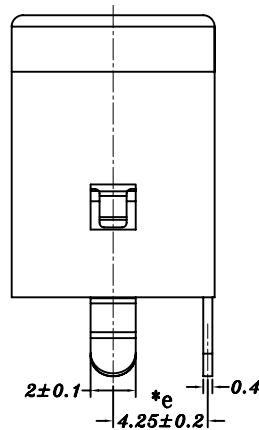

VIEW A-A

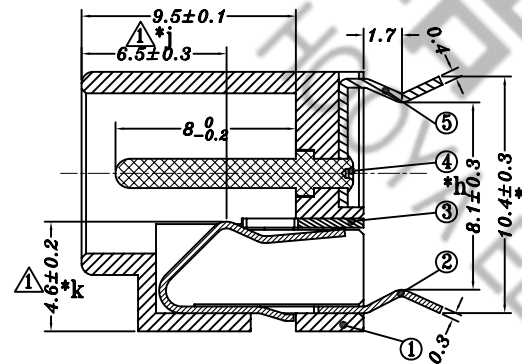

PCB HOLES(THE PATTERN SIDE) T=1.6

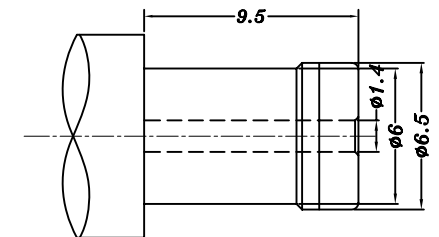

Matching Plug

					TOLERANCE UNLESS SPECIFIED							
					UP TO 5mm: ± 0.1	ANGULAR	A1	2022.06.28	1	新增弹片尺寸管控	GYW	
					ABOVE 5mm: ± 0.2	$\pm 1^{\circ}$	A0	2021.10.06		首次发行	GYW	
5	DC065 5#FLAT PIECE	BRASS	1	Ag PLATED			NO	DATE	REVISIONS		BY	APPD
4	DC065 PING	BRASS	1	Ni PLATED	TITLE:DC JACK		UNIT : MM		ROHS COMPLIANT	DWN		
3	DC065 2#CURVE PIECE	BRASS	1	Ag PLATED	MODEL: DC-065-1.3-PU-V		SCALE: 6:1		CHK'D			
2	DC065 3#SPRING	PBS	1	Ag PLATED					APPD			
1	DC065 CASE	PA10T	1	BLACK					PRO.AGL:		REV :A1	
NO.	PART NAME	MATERIAL	QTY	FINISHING								



HAOYU(HONGKONG)LIMITED
皓宇(香港)有限公司