


AMP | Timer Connector System

TE Internal #: 5-965641-1 Housing for Male Terminals, Wire-to-Wire, 6 Position, .197 in [5 mm] Centerline, Green, Signal, Panel Mount, Timer Connector System

View on TE.com >

Connectors > Automotive Connectors > Automotive Housings > Timer Connector Housing

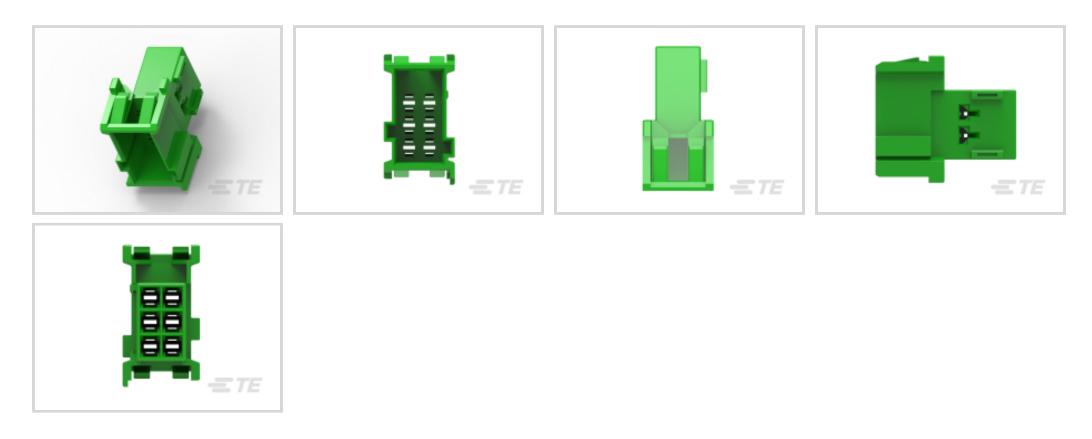

Connector System: Wire-to-Wire

Number of Positions: 6

Connector & Housing Type: Housing for Male Terminals

Centerline (Pitch): 5 mm [.197 in]

Sealable: No

All Timer Connector Housing (525)



Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Housing for Male Terminals
Sealable	No
Primary Locking Feature	On the Terminal
Configuration Features	
Number of Positions	6
Number of Rows	2
Electrical Characteristics	
Operating Voltage	28 VDC

Housing for Male Terminals, Wire-to-Wire, 6 Position, .197 in [5 mm] Centerline, Green, Signal, Panel Mount, Timer Connector System



Body Features

Cable Exit Angle	180°
Primary Product Color	Green
Connector & Keying Code	E
Contact Features	
Contact Size	2.8mm
Contact Type	Tab
Mating Tab Width	2.8 mm[.11 in]
Mechanical Attachment	
Terminal Position Assurance	No
Terminal Position Assurance Strain Relief	No Without
Strain Relief	Without
Strain Relief Mating Alignment Type	Without Keyed
Strain Relief Mating Alignment Type Mating Alignment	Without Keyed With
Strain ReliefMating Alignment TypeMating AlignmentConnector Mounting Type	Without Keyed With

Dimensions

Connector Height	30.6 mm[1.205 in]
Product Width	35.45 mm[1.396 in]
Product Length	17.5 mm[.689 in]
Usage Conditions	
Operating Temperature (Max)	70 °C, 75 °C, 80 °C, 85 °C, 90 °C, 100 °C, 105 °C, 110 °C, 120 °C[158 °F][167 °F][176 ° F][185 °F][194 °F][212 °F][221 °F][230 °F][248 °F]
Operating Temperature Range	-40 – 120 °C[-40 – 248 °F]
Operation/Application	
Circuit Application	Signal
Packaging Features	
Packaging Quantity	1500
Packaging Method	Box & Carton
Other	

C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .197 in [5 mm] Centerline, Green, Signal, Panel Mount, Timer Connector System



Serviceable	No
Connector Position Assurance Capable	No
Product Compliance For compliance documentation, visit the product page on TE.com>	
EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts





Also in the Series | Timer Connector System


C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .197 in [5 mm] Centerline, Green, Signal, Panel Mount, Timer Connector System



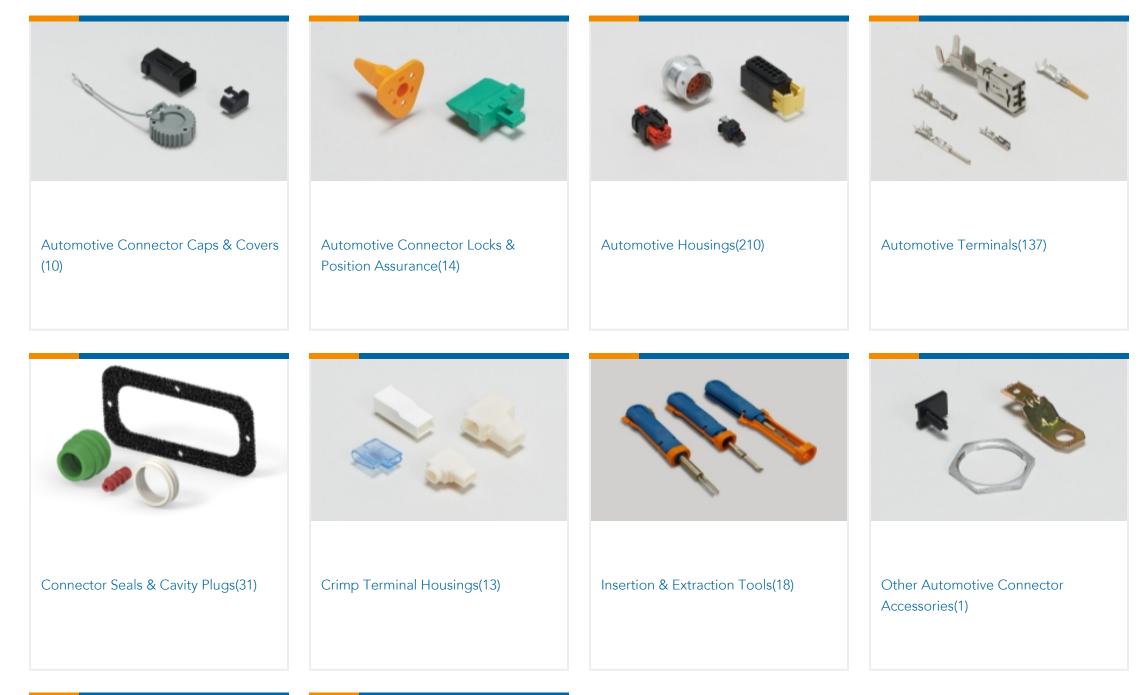

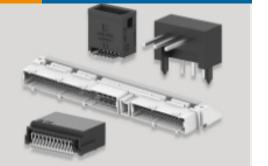



PCB Headers & Receptacles(77)

Quick Disconnects(4)

Customers Also Bought



C For support call+1 800 522 6752

Housing for Male Terminals, Wire-to-Wire, 6 Position, .197 in [5 mm] Centerline, Green, Signal, Panel Mount, Timer Connector System





TE Part #3-2333508-1 AMP MCP 2.8 SOCKET HSG 21 POS SEALED

TE Part #284106-4 5P.MODULAR CONN.MICRO RELAY W.

Documents

Product Drawings 6POS. TAB HOUSING, 2.8MM

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_5-965641-1_D.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_5-965641-1_D.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_5-965641-1_D.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages Timer Interconnection System

English

Product Specifications Application Specification

English