934454101 O NOT USE FOR NEW DESIGN

DEUTSCH | DEUTSCH DT-XT

TE Internal #: 2600035-1 Plug, Wire-to-Wire, 6 Position, .177 in [4.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DT-XT 6-way Plug Connectors



Connector System: Wire-to-Wire

Number of Positions: 6

Connector & Housing Type: Plug

Centerline (Pitch): 4.5 mm [.177 in]

Sealable: Yes

All DT-XT 6-way Plug Connectors (4)

Features

Product Type Features

Mixed & Hybrid Connector	No		
Connector Shape	Rectangular		
Connector System	Wire-to-Wire		
Connector & Housing Type	Plug		
Sealable	Yes		
Connector & Contact Terminates To	Wire & Cable		
Primary Locking Feature	Integrated in Housing		
Configuration Features			
Number of Positions	6		
Number of Rows	2		
Body Features			
Primary Product Color	Black		

934454101

Plug, Wire-to-Wire, 6 Position, .177 in [4.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT



Contact Features

Contact Size	Size 16			
Mating Pin Diameter	1.56 mm[.061 in]			
Mechanical Attachment				
Mating Alignment Type	Polarized			
Mating Alignment	With			
Connector Mounting Type	Cable Mount (Free-Hanging)			
Housing Features				
Centerline (Pitch)	4.5 mm[.177 in]			
Usage Conditions				
Operating Temperature (Max)	125 °C[257 °F]			
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]			
Packaging Features				
Packaging Quantity	500			
Other				
Connector Position Assurance Capable	No			

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JAN 2023 (233) Does not contain REACH SVHC
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products

934454101

Plug, Wire-to-Wire, 6 Position, .177 in [4.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT



will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-onreach

Compatible Parts




Also in the Series DEUTSCH DT-XT



0, , ,	

Customers Also Bought

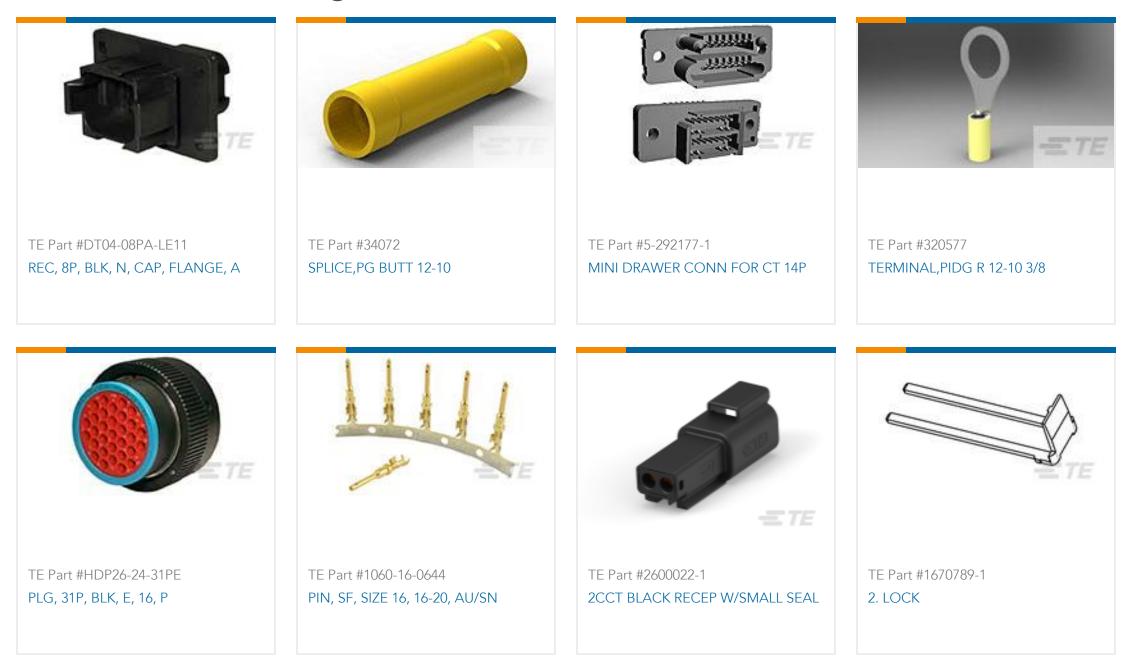

934454101

Plug, Wire-to-Wire, 6 Position, .177 in [4.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT





Documents

Product Drawings 6CCT BLACK PLUG W/SMALL SEAL

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_2600035-1_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_2600035-1_1.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_2600035-1_1.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals

UL Report

English