

MESSRS.

SPECIFICATION FOR APPROVAL**承 认 书**

Product	DYNAMIC SPEAKER
Part No.	ADK-2808AB-6C1 (RoHS)
Customer Approval	

Approved By	Checked By	Made By
王台平 MAY-05-2014	曹丽萍 MAY-05-2014	LILY MAY-05-2014

常 州 华 龙 电 子 有 限 公 司
DRAGONSTATE ELECTRONIC CORPORATION

中国江苏省常州市新区电子园新四路 36 号

Tel: +86-519-85110078. 86-519-85106698, Fax: +86-519-85101081**EDITION:1.1**

1. SPECIFICATION

ADK-2808AB-6C(RoHS)

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 28 mm	
03	Rated Input Power	2.0W	
04	Max. Input Powe	2.5W	
05	Impedance	8 ohm $\pm$ 15% at 1500Hz.	
06	Resonance Frequency (Fo)	750Hz $\pm$ 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	92dB (0.5W / 0.1m) $\pm$ 3 dB	at AVE 0.8, 1.0, 1.5, 2.0KHz.
08	Frequency Range	Fo – 10KHz	
09	Total Harmonics Distortion	Max10% at 1 KHz,2.5W.	
10	Voice Coil	Diameter 10.25 mm	
11	Magnet	Rare earth permanent (Nd-Fe-B) magnet Φ 9.5 x 1.5 mm	
12	Weight	5.0g $\pm$ 0.2g	
13	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
14	Operation Test	Must be normal at program source – 2.0W	
15	Buzz, Rattle, etc.	Should not be audible at 4.0V sine Wave between Fo to 20KHz	
16	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
17	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
18	Temperature	Operating temperature: -20°C to +60°C Storage temperature: -30°C to +70°C	

2.MEASURING METHOD

2-1 .Test Condition

STANDARD

Temperature : 15 ~ 35℃

Relative humidity : 45% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

JUDGEMENT

Temperature : $20 \pm 3^{\circ}\text{C}$

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

2-2 . Standard Test Fixture


1.Input Power : 0.5W(2.0V)

2.Zero Level : -dB


3.Mode : SPEAKER

4.potentiometer Range : 50dB


5.Sweep Time : 0.5sec

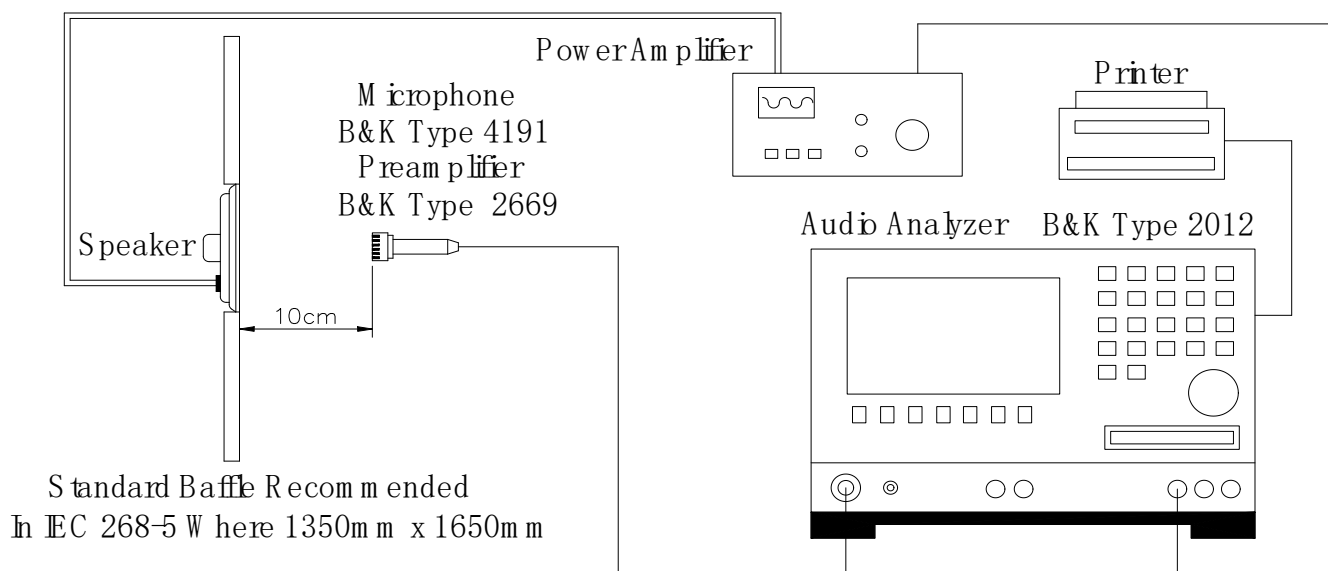


2-3. Frequency Response Curve

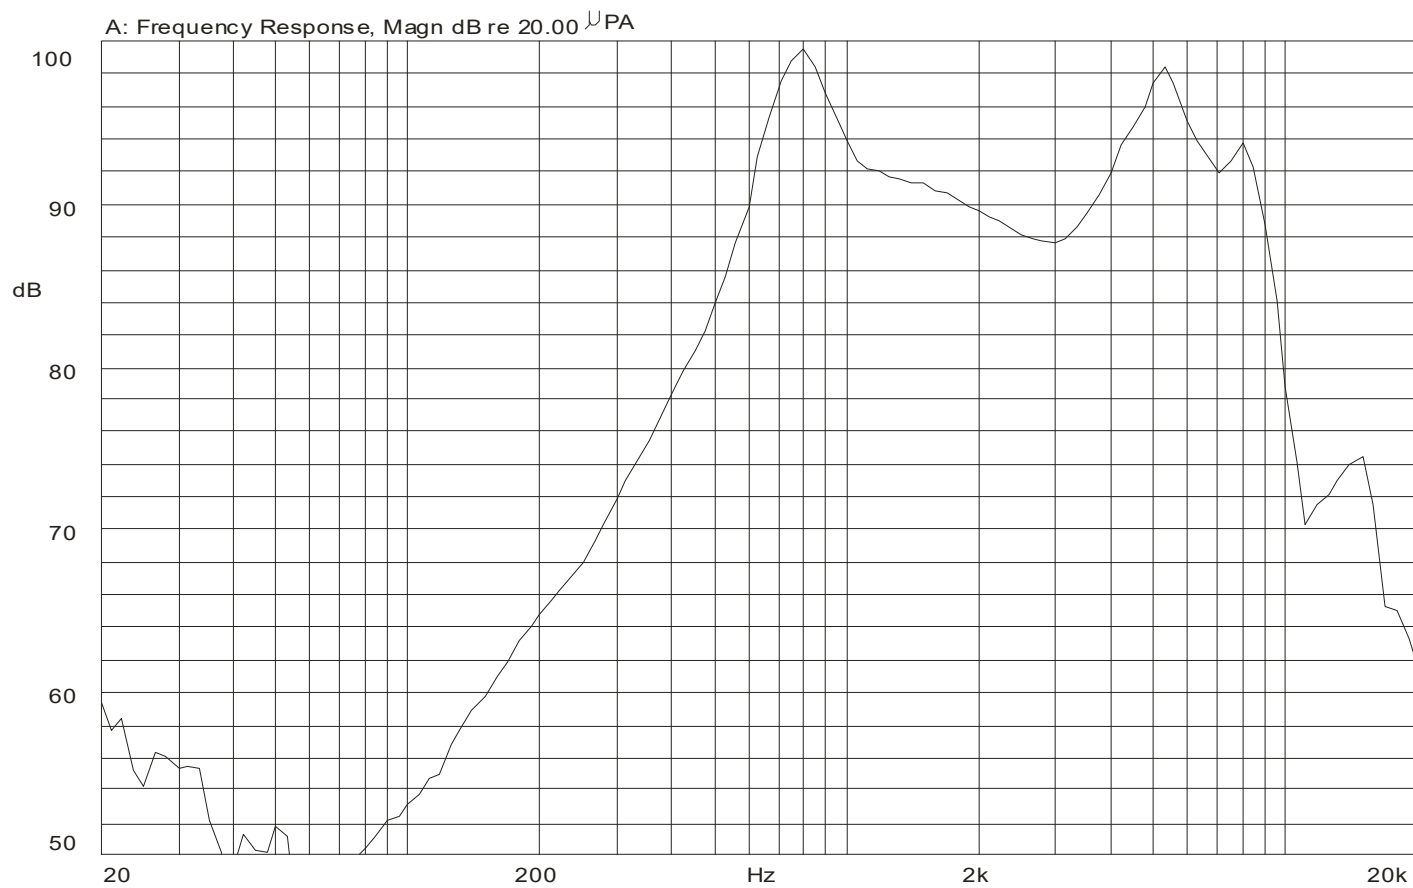

Mode: SSR



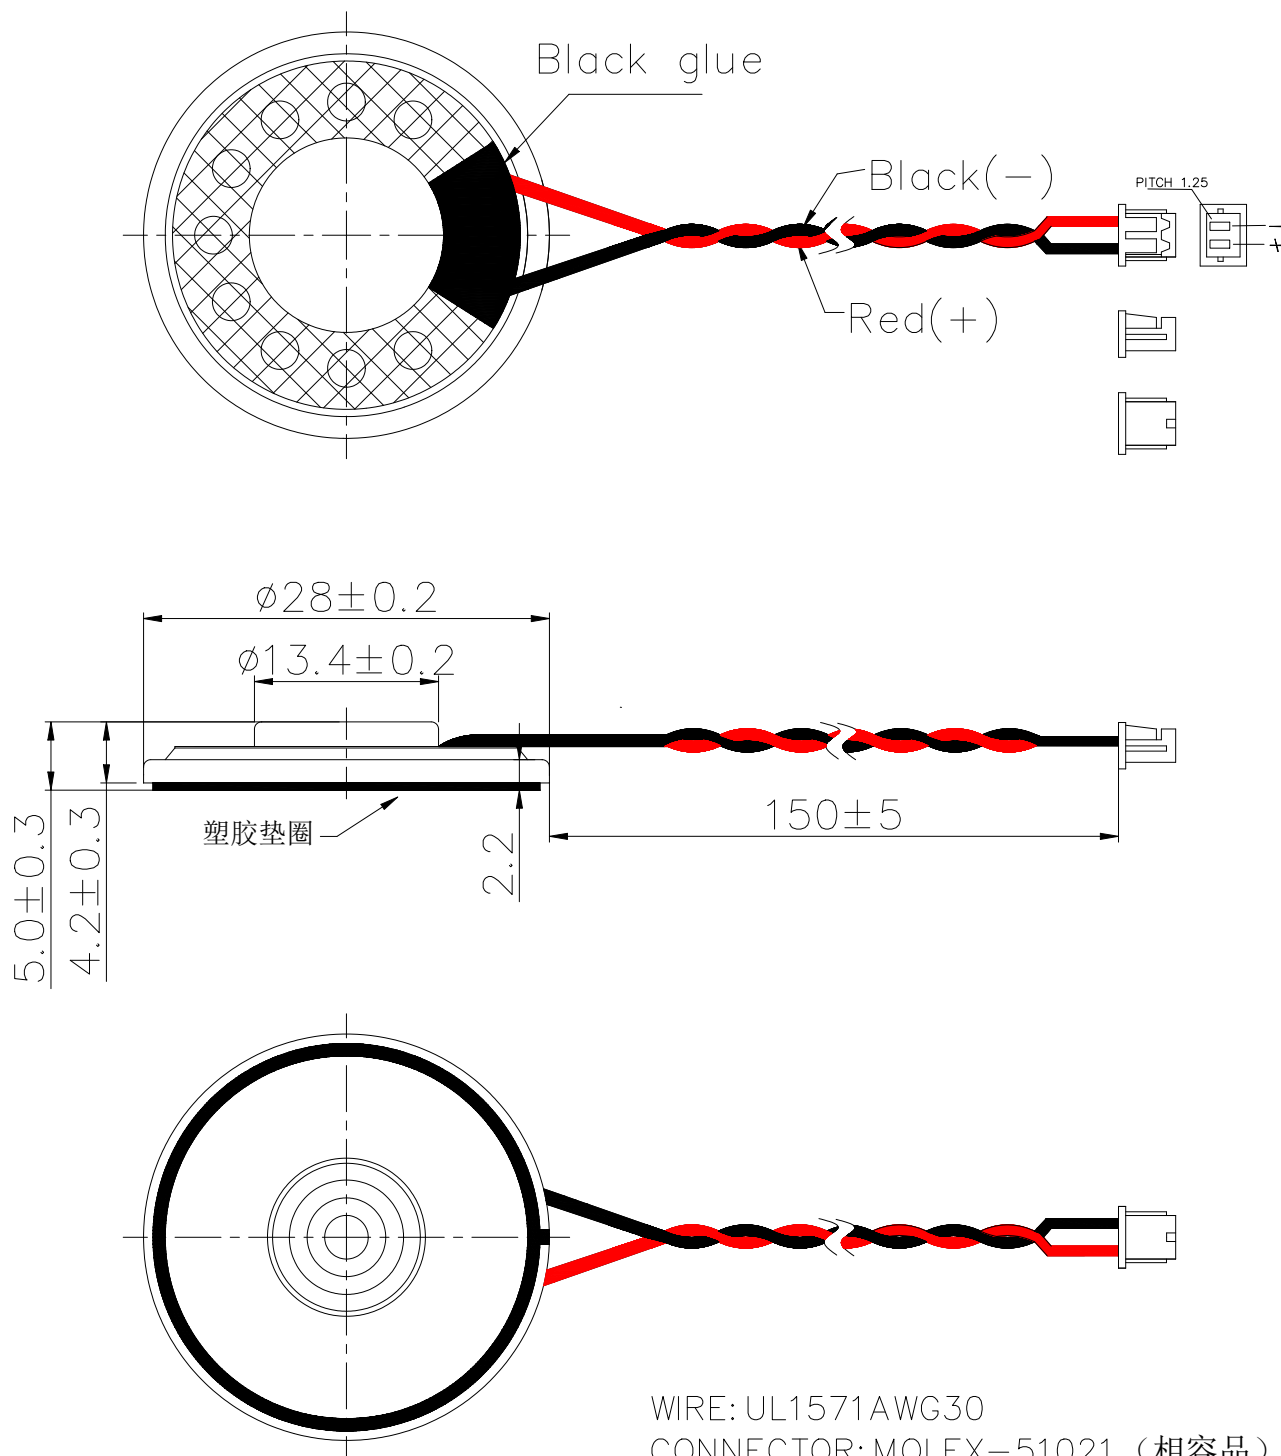

WIRE: UL1571AWG30

CONNECTOR: MOLEX-51021 (相容品)

DIAPHRAGM: MYLAR


CASE: FE ALLOY

TITLE: DYNAMIC SPEAKER		DRAWN: Lily	2014/05/14	SCALE: 2/1	SHEET: 1 OF 1
PART NO. ADK-2808AB-6C1		DESIGNED: R&D OF D.S.		UNITS: mm	
DWG NO. DSE-1250		CHECKED: Emily		TOLERANCE ± 0.5	
		APPROVAL: Eric		UNLESS OTHERWISE SPECIFIED:	
		MATERIAL: Fe alloy		ONE PLACE DECIMAL ± ***	
				TWO PLACE DECIMAL ± ***	
				THREE PLACE DECIMAL ± ***	

DS

DRAGONSTATE ELECTRONIC CORPORATION

4.RELIABILITY TESTS

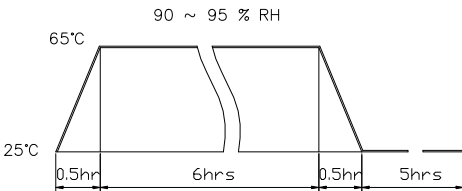Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-20^{\circ}\text{C} \pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+60^{\circ}\text{C} \pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of; 
05	Thermal cycle test.	Low temperature: $-40^{\circ}\text{C} \pm 3^{\circ}\text{C}$, temperature: $+70^{\circ}\text{C} \pm 3^{\circ}\text{C}$, cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~200~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X,y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X,y, z 6 direction. 1 times each, total 6 times.
09	Load test	Rated Power white noise is applied for 96 hours
10	Max Power test	Max power 1 min on - 2 min off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.

SOLDERING CONDITION

Recommend using constant branding iron in **30W**, and in temperature range **$350 \pm 10^{\circ}\text{C}$** .

Soldering time **2** seconds.