934451501 O NOT USE FOR NEW DESIGN

DEUTSCH | DEUTSCH DT-XT

TE Internal #: 1-2600023-9 Plug, Wire-to-Wire, 2 Position, .216 in [5.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT

View on TE.com >



Connectors > Automotive Connectors > Automotive Housings > DT-XT 2-way Plug Connectors



Connector System: Wire-to-Wire

Number of Positions: 2

Connector & Housing Type: Plug

Centerline (Pitch): 5.5 mm [.216 in]

Sealable: Yes

All DT-XT 2-way Plug Connectors (5)

Features

Product Type Features

Mixed & Hybrid Connector	No
Connector Shape	Rectangular
Connector System	Wire-to-Wire
Connector & Housing Type	Plug
Sealable	Yes
Connector & Contact Terminates To	Wire & Cable
Primary Locking Feature	Integrated in Housing
Configuration Features	
Number of Positions	2
Number of Rows	1
Body Features	
Primary Product Color	Black

934451501

Plug, Wire-to-Wire, 2 Position, .216 in [5.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT



Contact Features

Contact Size	Size 16
Mating Pin Diameter	1.56 mm[.061 in]
Mechanical Attachment	
Mating Alignment Type	Polarized
Mating Alignment	With
Connector Mounting Type	Cable Mount (Free-Hanging)
Housing Features	
Centerline (Pitch)	5.5 mm[.216 in]
Usage Conditions	
Operating Temperature (Max)	125 °C[257 °F]
Operating Temperature Range	-55 – 125 °C[-67 – 257 °F]
Other	
Connector Position Assurance Capable	No

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU	Compliant
EU ELV Directive 2000/53/EC	Compliant
China RoHS 2 Directive MIIT Order No 32, 2016	No Restricted Materials Above Threshold
EU REACH Regulation (EC) No. 1907/2006	Current ECHA Candidate List: JUNE 2023 (235) Candidate List Declared Against: JUNE 2023 (235) SVHC > Threshold: Octamethylcyclotetrasiloxane (D4) (.5% in Component Part) Decamethylcyclopentasiloxane (D5) (.5% in Component Part) Dodecamethylcyclohexasiloxane (D6) (.5% in Component Part) Article Safe Usage Statements: Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location.
Halogen Content	BFR/CFR/PVC Free, but Br/Cl >900 ppm in other sources.
Solder Process Capability	Not reviewed for solder process capability

934451501

Plug, Wire-to-Wire, 2 Position, .216 in [5.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT




Product Compliance Disclaimer

This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Also in the Series | DEUTSCH DT-XT

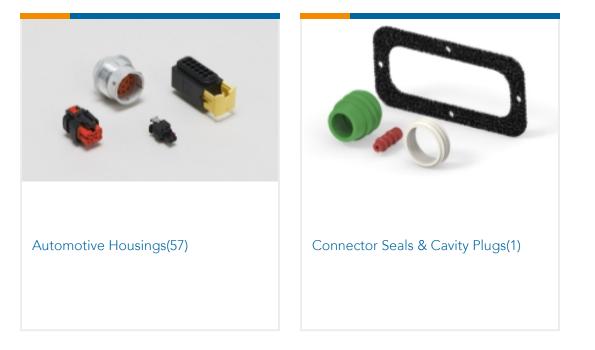


Customers Also Bought



934451501

Plug, Wire-to-Wire, 2 Position, .216 in [5.5 mm] Centerline, Sealable, Black, Wire & Cable, Cable Mount (Free-Hanging), DEUTSCH DT-XT



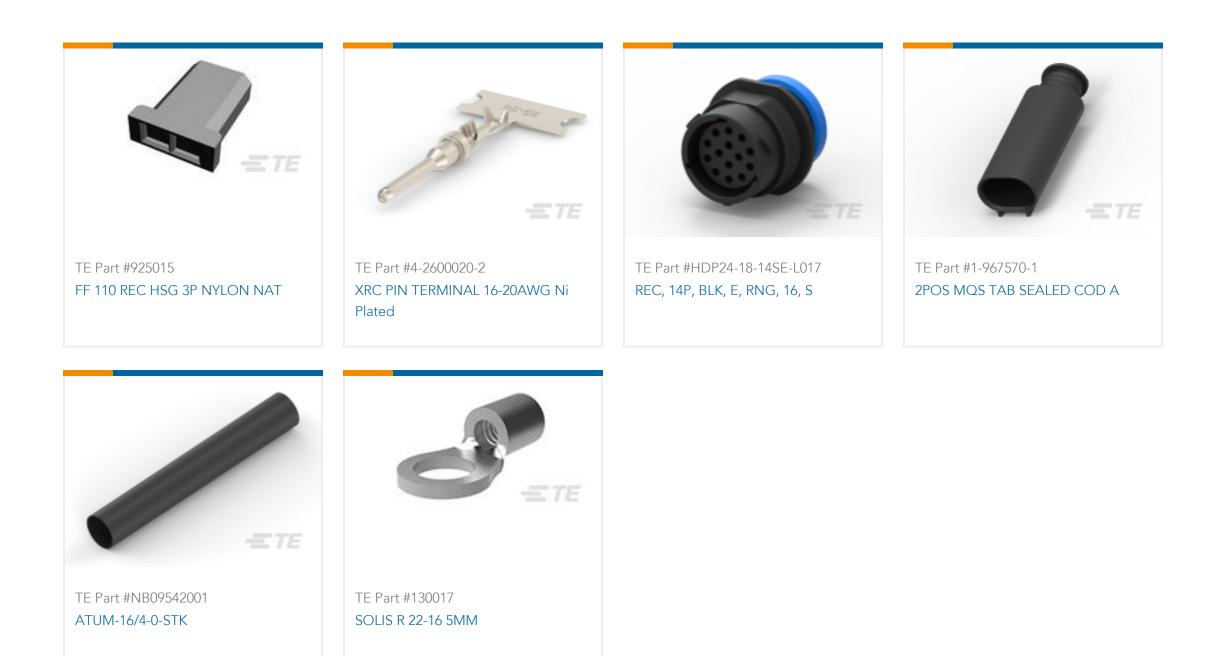

Documents

Product Drawings 2CCT BLACK PLUG W/SMALL SEAL & HS

English

CAD Files

3D PDF

3D

Customer View Model ENG_CVM_CVM_1-2600023-9_1.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_1-2600023-9_1.3d_igs.zip

English

Customer View Model

```
ENG_CVM_CVM_1-2600023-9_1.3d_stp.zip
```

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Product Specifications Application Specification

English

Agency Approvals UL Report

English