

**MESSRS.****SPECIFICATION FOR APPROVAL****承 认 书**

Product	DYNAMIC SPEAKER
Part No.	ADK-1308DA-4W(RoHS)
Customer Approval	

Approved By	Checked By	Made By
王台平 NOV-25-2009	曹丽萍 NOV-25-2009	LILY NOV-25-2009

**常 州 华 龙 电 子 有 限 公 司****DRAGONSTATE ELECTRONIC CORPORATION**

中国江苏省常州市新区电子园新四路 36 号

Tel: +86-519-85110078. 86-519-85106698, Fax: +86-519-85101081

EDITION:1.1

**1. SPECIFICATION**
**ADK-1308DA-4W(RoHS)**

ITEM		SPECIFICATIONS	
01	Type	Dynamic speaker	
02	Dimension	External diameter 13 mm	
03	Rated Input Power	0.3W	
04	Max. Input Power	0.5W for 1 minute	
05	Impedance	8 ohm ± 15% at 1500Hz.	
06	Resonance Frequency (Fo)	1000Hz ± 20% at Fo, 1V	
07	Sensitivity (S.P.L.)	86dB (0.3W / 0.1m) ± 3 dB	at AVE 1.0K,1.2K,1.5K,2.0KHz
		91dB (0.3W / 0.1m) ± 3 dB	
08	Frequency Range	Fo – 6KHz	
09	Total Harmonics Distortion	Max 8 % at 1 KHz,0.3W.	
10	Voice Coil	Diameter 7.4mm	
11	Magnet	Rare earth permanent (Nd-Fe-B) magnet Φ6.8x 0.7mm	
12	Weight	1.1g ± 0.3g	
13	Appearance	Should not exist any obstacle to be harmful to normal operation; damages, cracks, rusts and distortions, etc.	
14	Operation Test	Must be normal at program source – 0.3W	
15	Buzz, Rattle, etc.	Should not be audible at 1.56V sine Wave between Fo to 20KHz	
16	Polarity	When positive voltage is applied to the terminal marked (+), diaphragm should move to the front.	
17	Terminal Strength	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.	
18	Temperature	Operating temperature: -20°C to +60°C	
		Storage temperature: -30°C to +70°C	

## Test Condition

### STANDARD

Temperature : 15 ~ 35℃

Relative humidity : 25% ~ 85%,

Atmospheric pressure : 860mbar to 1060mbar.

### BASIC

Temperature : 20±3℃

Relative humidity : 60% ~ 70%,

Atmospheric pressure : 860mbar to 1060mbar

## Standard Test Fixture


1.Input Power : 0.3W ( 1.56V )

2.Zero Level : -dB


3.Mode : SPEAKER

4.potentiometer Range : 50dB

5.Sweep Time : 0.5sec

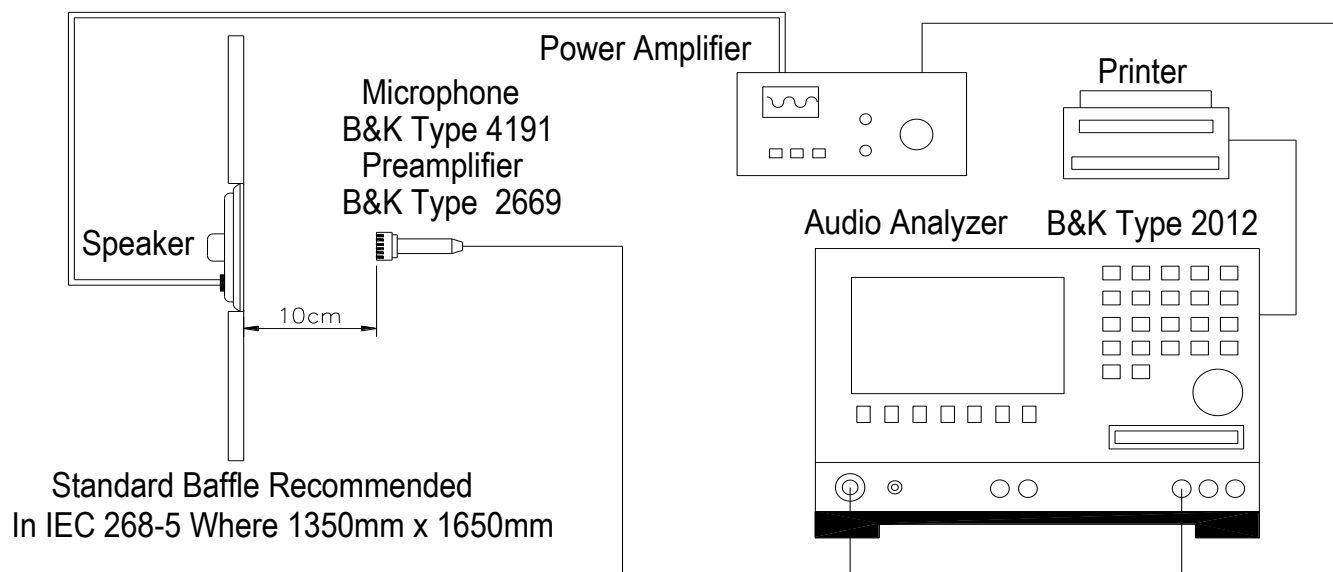


Frequency Response Curve 0.3W/10cm

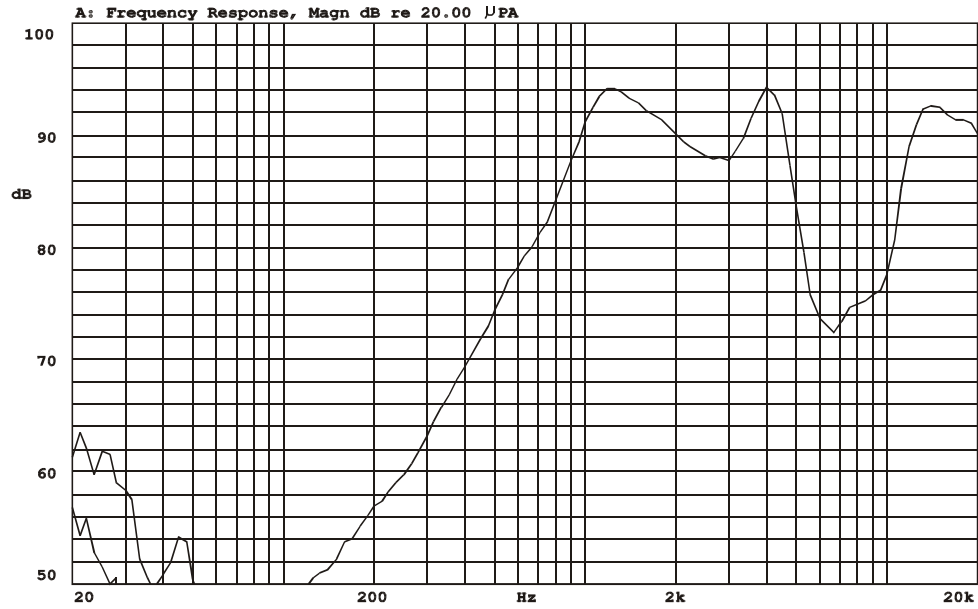

Mode: SSR



REV NO.	REVISION NOTE	APPROVAL	DATE
---------	---------------	----------	------

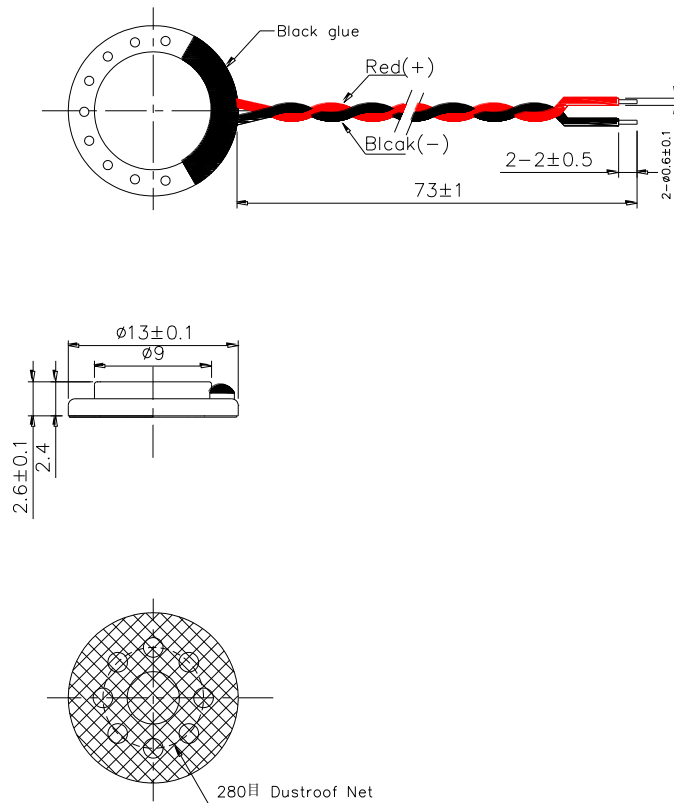


Wire: UL3302AWG32  
 Diaphragm: MYLAR  
 Case: Fe alloy

TITLE: DYNAMIC SPEAKER		DRAWN: Lily	2009/11/25	SCALE: 2:1	SHEET: 1 of 1
PART NO. ADK-1308DA-4W	1	DESIGNED: R&D OF D.S.	UNITS: mm		
DWG NO. DSE-1046		CHECKED: Emily	TOLERANCE		
		APPROVAL: Eric	20~11	± 0.3	
	REV	MATERIAL: Fe alloy	10~5	± 0.2	
			<4	± 0.1	

DS

DRAGONSTATE ELECTRONIC CORPORATION

## RELIABILITY TESTS

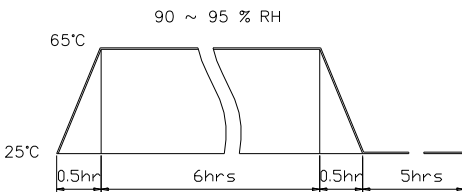Items.		Specifications
01	High temp. Test	Keep 96 hours at $+70^{\circ}\text{C}\pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
02	Low temp. Test	Keep 96 hours at $-30^{\circ}\text{C}\pm 3^{\circ}\text{C}$ and leave 3 hours in normal temperature and then check
03	Humidity test	Keep 96 hours at $+60^{\circ}\text{C}\pm 3^{\circ}\text{C}$ relative humidity 95% and leave 3 hours in normal temperature and then checked.
04	Temp./Humidity cycle	<p>The part shall be subjected 5 cycles. One cycle shall be 12 hours and consist of;</p> 
05	Thermal cycle test.	Low temperature: $-30^{\circ}\text{C}\pm 3^{\circ}\text{C}$ , temperature: $+70^{\circ}\text{C}\pm 3^{\circ}\text{C}$ , cycle: 1 hour/cycle each, and then keep 5 cycles in a room.
06	Vibration	10~200~10Hz sin-wave sweep 15min. 5G(constant) X,Y, Z 3 direction. 2 hours each, total 6 hours.
07	Fix drop test	Fix on jig. Then drop from 152cm height to the concrete floor X, y, z 6 direction. 5 times each, total 30 times.
08	Free drop test	Free drop from 100cm height to the concrete floor X, y, z 6 direction. 1 times each, total 6 times.
09	Rated Power test	Rated Power white noise is applied for 96 hours
10	Max Power test	Max power 1 min on – 2 min off 10 cycles.
11	Terminal strength test	Capable of withstand 1kg load for 30 seconds without resulting in any damage or rejection.
<b>Criterion:</b> After these test , the change of S.P.L shall be within $\pm 3 \text{ dB}$ .		

## SOLDERING CONDITION

Recommend using constant branding iron in **15 ~ 30W**, and in temperature range  **$300 \pm 10^{\circ}\text{C}$** .

Soldering time not over **3** seconds.