




0077191A702

110 Delta Drive
Pittsburgh, PA 15238
NAFTA Sales: (1)800-245-3984
HK Sales : (852)3102-9337
magnetics@spang.com
www.mag-inc.com

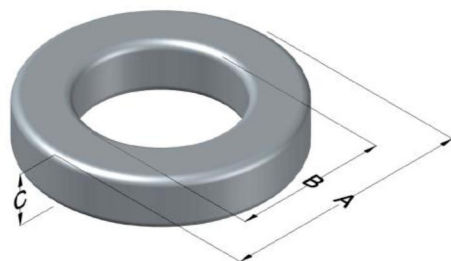

Kool Mμ Permeability (μ)	A _L (nH/T ²)	Core Marking			Coating Color
		Lot Number	Part Number	Inductance Grade	
26	80 ± 8%	XXXXXX	77191A702	N/A	Black

Dimensions	Uncoated		Coated Limits			Packaging Cardboard cut-outs Box Qty= 60 pcs
	(mm)	(in)	(mm)	(in)		
OD (A)	57.15	2.250	58.04	2.285	max	
ID (B)	26.39	1.039	25.58	1.007	min	
HT (C)	20.32	0.800	21.08	0.830	max	

Electrical Characteristics			Physical Characteristics						
Watt Loss @ 100 kHz, 100mT max(mW/cm ³)	DC Bias min (oersteds)		Voltage Breakdown wire to wire min (V _{AC})	Break Strength min (kg)	Window Area W _A (mm ²)	Cross Section A _e (mm ²)	Path Length L _e (mm)	Volume V _e (mm ³)	Weight (g)
900	80%	70%	3000	163.0	514	305	125	38,100	215
	95	130							

Winding Information						Temperature Rating	
Winding Length Per Turn				Wound Coil Dimensions (mm)			Curie Temp: 500°C
Winding Factor	(mm)	Winding Factor	(mm)	40% Winding Factor	OD	62.0	Coating Temp (Continuous up to): 200°C
					HT	29.0	
	Completely Full Window	Max OD	75.7	Notes:			
		Max HT	39.0				
0%	74.6	40%	87.6		Surface Area (mm²)		
20%	81.3	45%	89.7				
25%	82.8	50%	91.7				
30%	84.3	60%	95.5		Unwound Core		11,000
35%	86.2	70%	100.1		40% Winding Factor		15,550

Typical DC Bias Performance

