

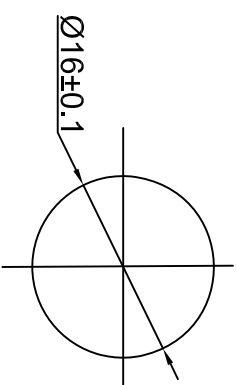
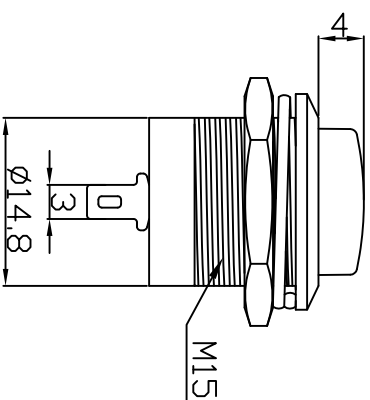


PB-02

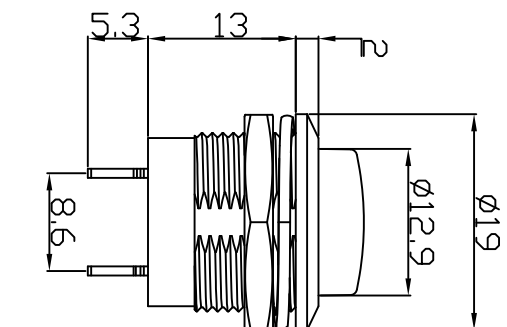

Panel Thickness: 3mm MAX.

MATERIAL

Base: PA66, UL rated :94V-2 Min. ;

Cap: ABS;

Terminal: Copper, Silver or Tin plated ;

Nut: Brass, Ni plated.

Rating: 6A 125V AC ;

3A 250V AC ;

Contact Resistance: 50mΩ Max. ;

Insulation Resistance:DC 500V 100M Ω Min.;

Dielectric Strength: AC 1000V 1 minute

Total Travel: $2.4 \pm 0.4 \text{ mm}$

Operating Force: 250±50gf

Operating Life: 10,000 cycles

Mechanical Life:50,000 cycles Min. ;

Operating Temperature: 0°C~85°C

Function: OFF-(ON)

Y	Yellow	黄色
W	White	白色
U	Blue	蓝色
R	Red	红色
O	Orange	橙色
G	Green	绿色
B	Black	黑色
A	Gray	灰色
1		
2	Reset	
3		
印字		
CAP COLOR (X)		

CUT-OUT

			公差 TOLERANCES		X± 0.3 ,XX± 0.15	角度	± 1°	单位 DIMENSION UNIT		mm.
			版本 VERSION	A1	比例尺 SCALE	NONE	日期 DATE		品名 TITLE	图号 DRAWING NO
A1	重新整理发行	2020.7.9	N/A				2020.07.09			
A0	新发行	2007.7.15	N/A	核准	核对	Z. H. B.	绘图 HXG		PB-02-PM-G	PB-02-PM-G_A1
版本 VER	变更说明 CHANGE DESCRIPTION	日期 DATE	EEN NO.	APPROVED BY	CHECKED BY	DRAWN BY				