
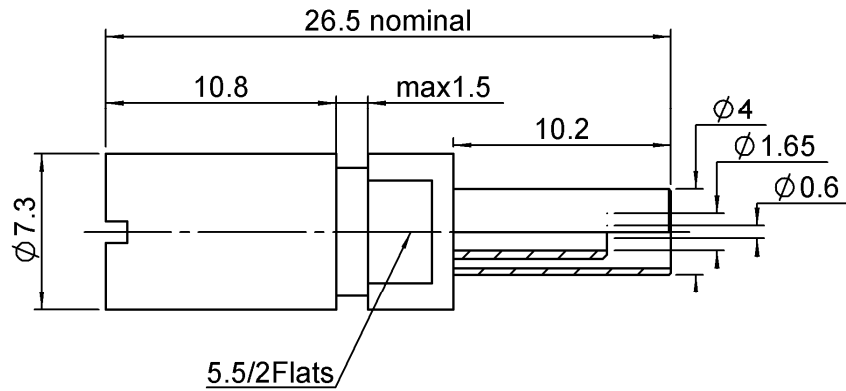

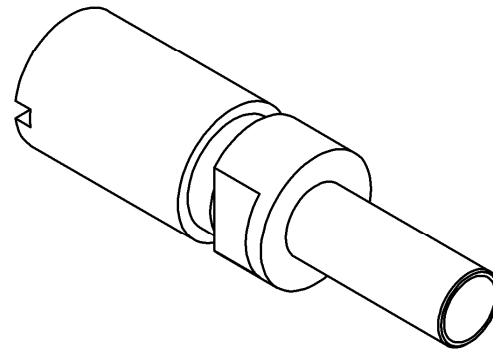


STRAIGHT PLUG(SLIDE ON)
FOR CABLE 2.6/50+75
R120A.074.215


Series : ECO DIN1.0/2.3


PANEL CUT OUT


mm		
	Maxi	mini
A	5.8	5.73



All dimensions are in mm.



COMPONENTS	MATERIALS	PLATING (μm)
BODY	BRASS	NICKEL
CENTER CONTACT	BRASS	GOLD
OUTER CONTACT		
INSULATOR	PTFE	
GASKET		
OTHERS PARTS	BRASS	NICKEL
-	-	-
-	-	-

Issue : 0908 A

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL

STRAIGHT PLUG(SLIDE ON)**R120A.074.215****FOR CABLE 2.6/50+75****Series : ECO DIN1.0/2.3****PACKAGING**

Standard	Unit	Other
100	'W' option	Contact us

SPECIFICATION**ELECTRICAL CHARACTERISTICS**

Impedance	50(75)	Ω
Frequency	0-4(1)	GHz
VSWR	1.35* + 0.000	x F(GHz) Maxi
Insertion loss	NA	$\sqrt{F}(\text{GHz})$ dB Maxi
RF leakage	- (NA)	- F(GHz)) dB Maxi
Voltage rating	350	Veff Maxi
Dielectric withstanding voltage	750	Veff mini
Insulation resistance	5000	M Ω mini

CABLE ASSEMBLY

Stripping	a	b	c	d	e	f
mm	2.50	5.40	10.0	0.00	7.50	0.00

Assembly instruction :

Crimp 01

Recommended cable(s)

RG 174
RG 174 FTX
RG 188
RG 316
KX 22A
RG 179
RG 187

Characteristics indicated on this data sheet are those that can be achieved with the highest performance cable. Intrinsic limitations of the cable may diminish the performance of the assembly

Cable retention

- pull off **NA** N mini
- torque **NA** N.cm

MECHANICAL CHARACTERISTICS

Center contact retention	
Axial force – Mating end	NA N mini
Axial force – Opposite end	NA N mini
Torque	NA N.cm mini

Recommended torque

Mating	NA N.cm
Panel nut	NA N.cm
Clamp nut	NA N.cm
A/F clamp nut	0.000 mm

Mating life	100 Cycles mini
Weight	0.691 g

ENVIRONMENTAL

Operating temperature	-40/+85 ° C
Hermetic seal	NA Atm.cm3/s
Panel leakage	NA

TOOLING

Part Number	Description	Hexagon
.	.	.
R282.211.000	CRIMPING TOOL	3.25

OTHER CHARACTERISTICS*75 Ω (0-1GHz)**Issue : 0908 A**

In the effort to improve our products, we reserve the right to make changes judged to be necessary.

RADIAL 