


SOT-23



1. Gate
2. Source
3. Drain

$V_{(BR)DSS}$	$R_{DS(on) Typ}$	$I_D Max$
30V	23m Ω @10V	5.8A
	31m Ω @4.5V	


Features

Advanced trench process technology
High Density Cell Design For Ultra Low On-Resistance

Application


- Load Switch for Portable Devices
- DC/DC Converter

Marking



XXX:Date Code

Equivalent Circuit



Absolute Maximum Ratings ($T_A=25^{\circ}C$ unless otherwise noted)

Parameter	Symbol	Value	Unit
Drain-Source Voltage	V_{DS}	30	V
Gate-Source Voltage	V_{GS}	± 20	V
Continuous Drain Current	I_D	5.8	A
Pulsed Drain Current (Note 1)	I_{DM}	30	A
Power Dissipation(Note 2)	P_D	1.4	W
Thermal Resistance from Junction to Ambient(Note 2)	$R_{\theta JA}$	150	$^{\circ}C/W$
Junction Temperature and Storage Temperature	T_J, T_{stg}	-50 ~150	$^{\circ}C$

Notes: Stresses exceeding Maximum Ratings may damage the device. Maximum Ratings are stress ratings only. Functional operation above the Recommended Operating Conditions is not implied. Extended exposure to stresses above the Recommended Operating Conditions may affect device reliability.

Ta = 25°C unless otherwise specified

Symbol	Parameter	Condition	Min	Typ	Max	Unit
V_{(BR)DSS}	Drain-Source Breakdown Voltage	V_{GS}=0V, I_D=250μA	30	--	--	V
I_{DSS}	Drain-Source Leakage Current	V_{DS}=30V, V_{GS}=0V	--	--	1	uA
I_{GSS}	Gate-Source Leakage Current	V_{GS}=±20V, V_{DS}=0V	--	--	±100	nA
V_{GS(TH)}	Gate Threshold Voltage	V_{DS}=V_{GS}, I_D=250μA	1.1	--	3.0	V
R_{DS(ON)}	Drain-Source On-State Resistance(Note 3)	V_{GS}=10V, I_D=5.8A	--	23	30	mΩ
		V_{GS}=4.5V, I_D=3A	--	31	42	mΩ

Dynamic Electrical Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
C_{iss}	Input Capacitance	V_{DS}=15V V_{GS}=0V f=1MHz	--	--	820	pF
C_{oss}	Output Capacitance		--	118	--	pF
C_{rss}	Reverse Transfer Capacitance		--	85	--	pF
Q_g	Total Gate Charge	V_{DS}=15V V_{GS}=4.5V I_D=5.8A	--	9.7	12	nC
Q_{gs}	Gate Source Charge		--	1.6	--	nC
Q_{gd}	Gate Drain Charge		--	3.1	--	nC

Switching Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
t_{d(on)}	Turn on Delay Time	V_{DS}=15V V_{GS} =4.5V I_D=5A R_G=2.7Ω	--	3.3	5	ns
t_r	Turn on Rise Time		--	4.8	7	ns
t_{d(off)}	Turn Off Delay Time		--	26.3	40	ns
t_f	Turn Off Fall Time		--	4.1	6	ns







Source Drain Diode Characteristics

Symbol	Parameter	Condition	Min	Typ	Max	Unit
I_{SD}	Source drain current(Body Diode)	T_A=25°C	--	--	2.5	A
V_{SD}	Drain-Source Diode Forward Voltage	I_S=1A, V_{GS}=0V	--	0.7	1.1	V

Notes:

- 1.Pulse width limited by maximum allowable junction temperature
- 2.The value of P_D&R_{θJA} is measured with the device mounted on 1 in² FR-4 board with 2oz.Copper, double sided, in a still air environment with Ta=25°C.
- 3.Pulse test ; Pulse width≤300us, duty cycles≤2%


Typical Characteristics

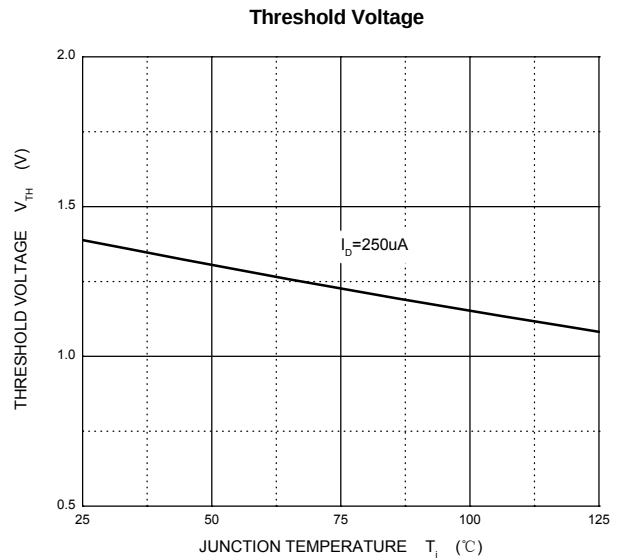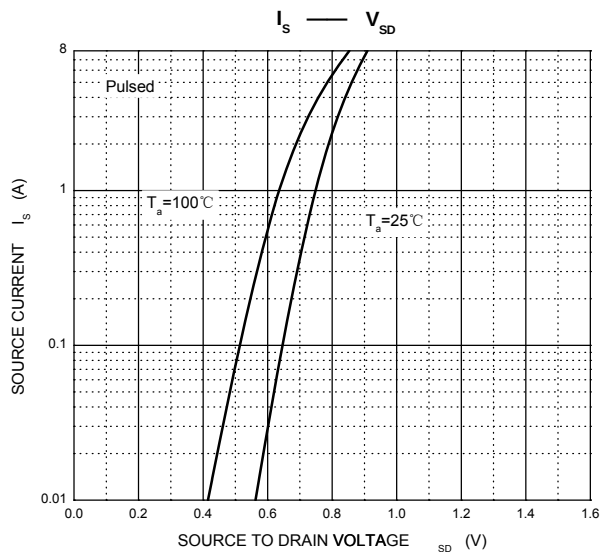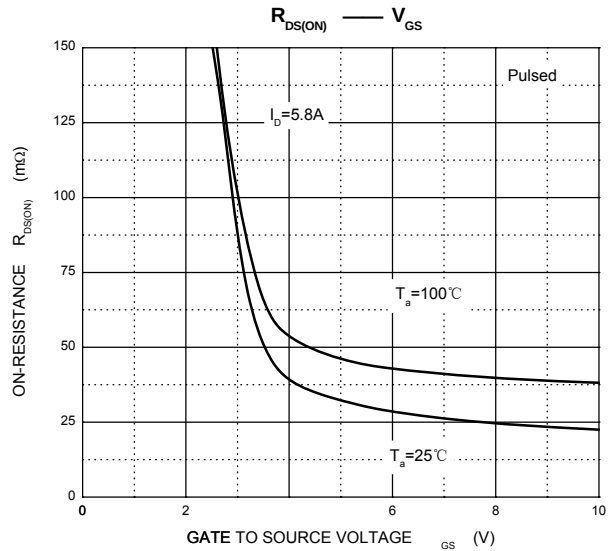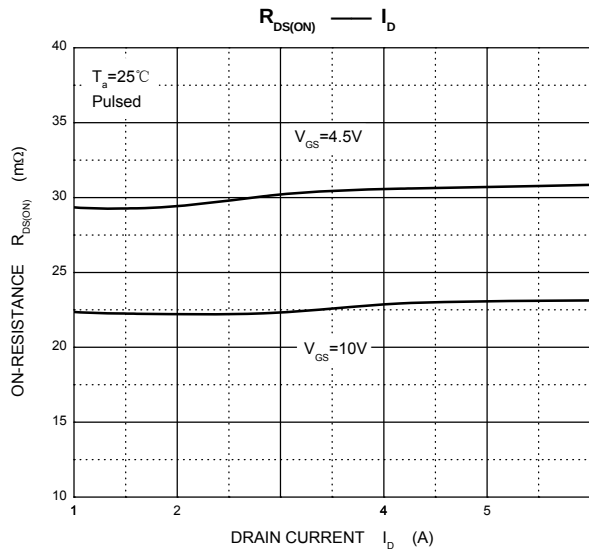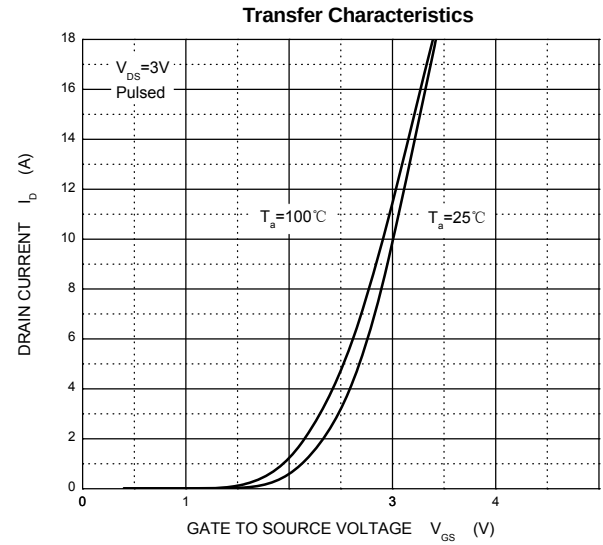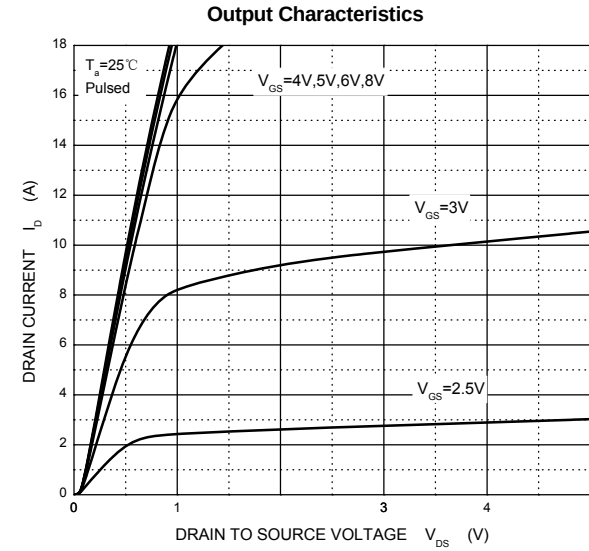

The curve above is for reference only.


Outlitne Drawing

SOT-23 Package Outline Dimensions

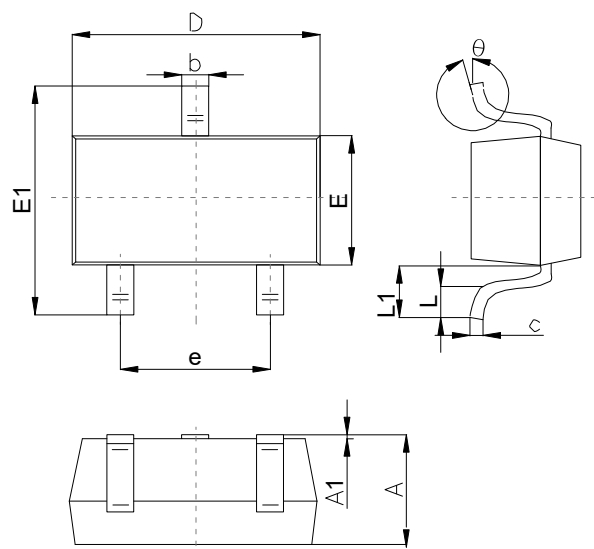

Symbol	Dimensions In Millimeters		
	Min	Typ	Max
A	0.65		1.40
A1	0.00		0.20
b	0.30		0.55
c	0.08		0.20
D	2.70		3.10
E	1.15		1.65
E1	2.10		2.80
e	1.70		2.10
L	0.15		0.50
L1	0.35		0.70
θ	0°		12°

Suggested Pad Layout

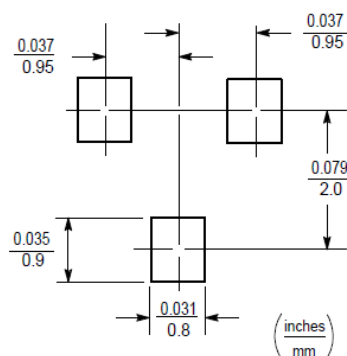

Note:

1. Controlling dimension: in/millimeters.
2. General tolerance: $\pm 0.05\text{mm}$.
3. The pad layout is for reference purposes only.