
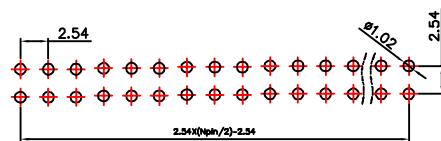
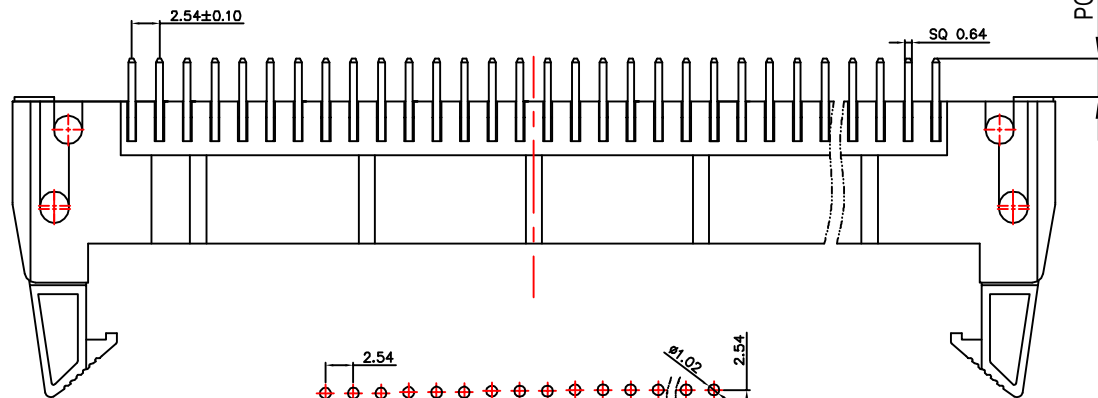
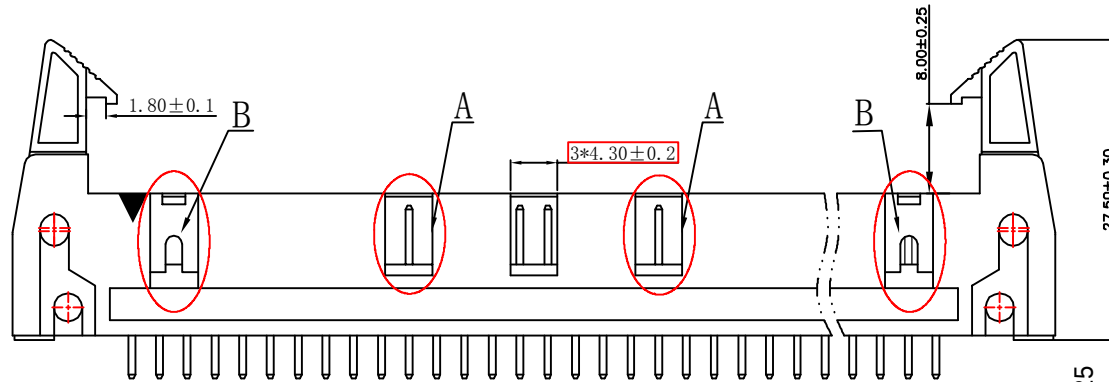



图号 N2540002

SPECIFICATIONS

Current Rating: 3 Amps
Withstanding Voltage: AC 1000V
Insulation Resistance: 1000 Meg ohms MIN
Contact Resistance: 20 milli ohms MAX
Operation Temperature: -40°C to +105°C
Insulator Material: Polyester (UL94V-0)
Standard: PBT
Contact Material: Brass
Contact Plating: Goldflash over 40u" Ni
Max. Processing Temp: 180°C for 30-60 seconds
(200°C for 10 seconds)

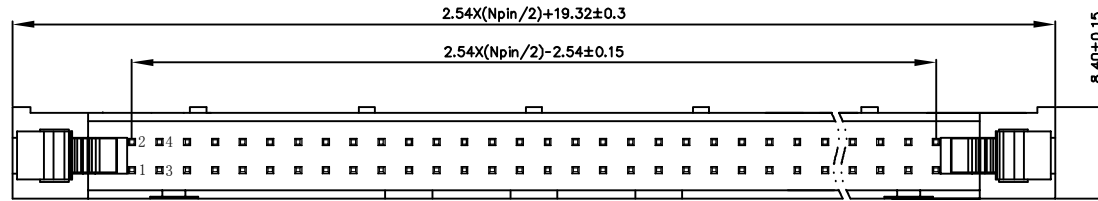

RECOMMEND P. C. BOARD LAYOUT
PCB TOLERANCE: ±0.05 (TOP VIEW)

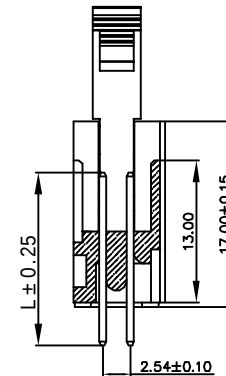

尺寸对照列表		
ITEM	PC	L
Standard	3.5	15.8
Alternate	3.3	15.8

1: “A” 仅限60跟64Pin有此结构
2: “B” 在18Pin以下无此结构

除非另有说明, 否则公差按下表:				浙江博穆精密科技有限公司					
尺寸标注	公差			产品型号	2.54牛角 20P 180度 长耳 L15.8 PC3.5 PBT 0.6U				
	长度	角度			产品料号				
.X	±0.25	±2°		设计	游 川 2012-08-18				
.X	±0.20	±1.5°							
.XX	±0.15	±1°		审核	蔡逸伟 2012-08-18				
.XXX	±0.10	±0.5°							
批准				何 玲 2012-08-18				版本	
								A/0	比例
								1:1	单位
								mm	图幅
								A4	第 1 张 共 1 张