

SWITCH

Operation:DIP 8PIN&三档正拨开关



LTEM NO.:SS-23D03- **

(L16.0×W6.7×H8.0 SLIDE-SWITCH)



Technical parameter

PROJECT	LEVEL	A[better product]	B[average product]
Electrical Properties	Contact Rating	25mA, 24V DC	
	Initial Contact Resistance	30mΩ max.	50mΩ max.
	Insulation Resistance	100MΩ min.500V DC	Skey/PD: 100MΩ min.300V DC
	Withstand Voltage	500V AC for 1 minute	350 V AC for 1 minut
	There No Load	10,000 Cycles	8,000 Cycles
Durable Performance	Rated Load	8,500 Cycles	6,500 Cycles
	Storage temp.	-40℃~+85℃(Operating Temp:)	

表面插装 DIP


正向操作 LATERAL

精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

Unit:mm

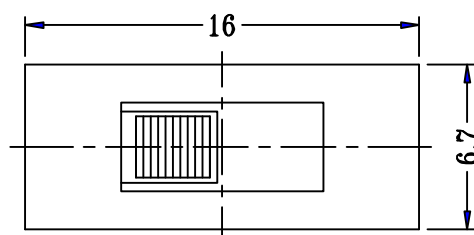



DIM H

可定制柄長

SS-23D03 G□

产品型号

柄长
G2=2.0mm
G3=3.0mm
G4=4.0mm
G10=10.0mm

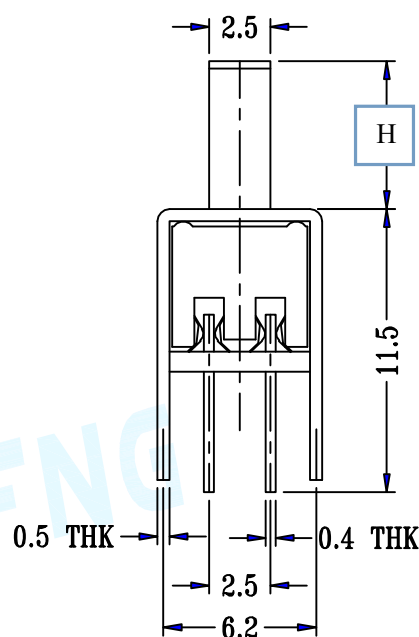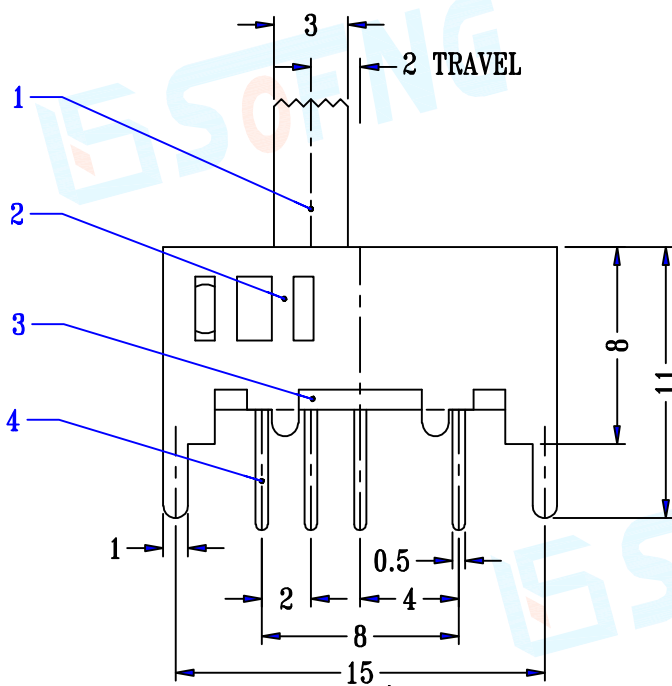


Operating Force

Inward

3.50N (100grams) $\pm$ 50gf

Exiting

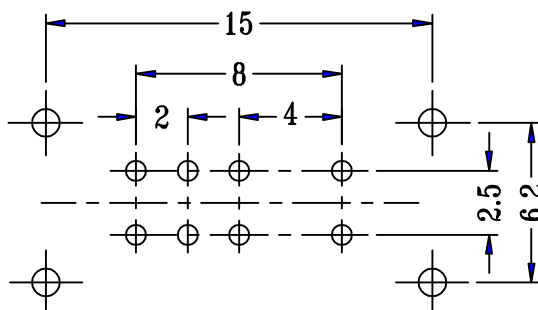
3.50N (100grams) $\pm$ 50gf

Pin Definition



Material declaration

No.	NAME	Type	Description
①	KNOB	1	POM (Black)热塑性
②	FRAME	1	STEELSTRIP (Ni PLATED)
③	BASE	1	PHENOLIC RESIN (DM)NATURAL
④	TERMINAL	8	BRASS STRIP(Ag PALTED)
⑤	CONTACT CLIP	2	PBS STRIP(Ag PALTED)
⑥	SPRING	1	STEEL WIRE (NATURAL)
⑦	STEEL BALL	1	STEEL (NATURAL)



SCHEMATIC (SHORTING)



本品不屬於危害性廢棄物,須丟棄時可以委託
回收商予以回收再生處理。

Products do not belong to •

注記 NOTICE

1. 碩方公司擁有最終解釋權; The company reserves the right of final interpretation;
2. 文件禁止外洩、轉載; Leaked and reproduced prohibited;
3. 未經授權修改無效。Modify is invalid.

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生; 運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中 [常溫 25℃,濕度在 50℃以內],不可導致材料變形或氧化。