


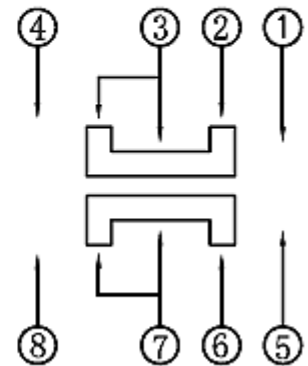
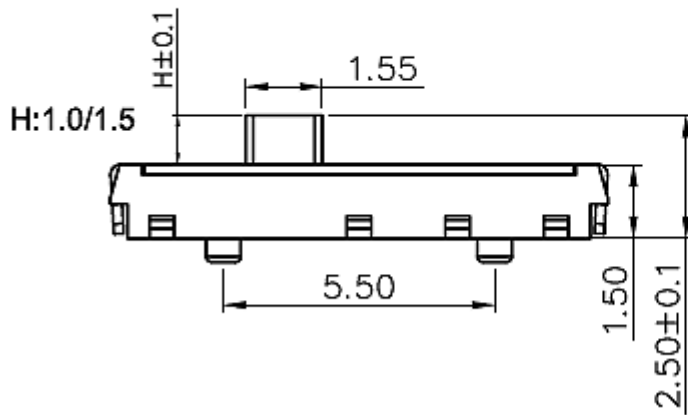


Operation: SMT/pull

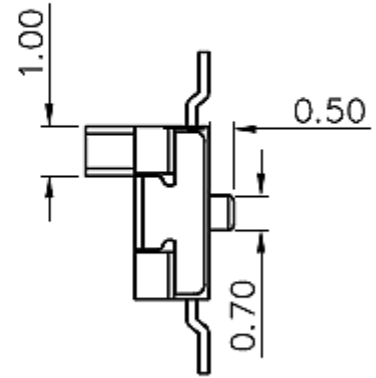

LTEM NO.:MS-1400
(10.1×3.5 SLIDE-SWITCH)

Unit:mm

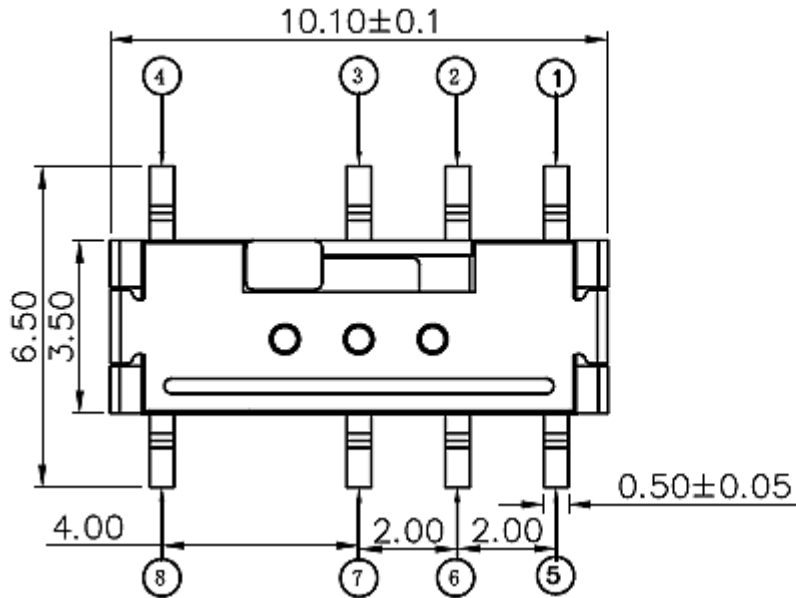

Technical parameter

PROJECT \ LEVEL		A[better product]	B[average product]	C[low product]
Electrical Properties	Initial Contact Resistance	30mΩ max.	30mΩ max.	no data!
	Contact Resistance	100mΩ min.100V DC Skey/PD: 50mΩ min.100V DC		
	Withstand Voltage	300V AC for 1min	250 V AC for 1min	
Durable Performance	There No Load	12,000 Cycles	10,000 Cycles	no data!
	Rated Load	18,000 Cycles 50mΩ max.	8,000 Cycles 30mΩ max.	no data!
Insertion Force		4.0Kgf MAX (Springback:)		

表面插裝 DIP

正向導入 LATERAL


精密部品 NICETY

可靠 STABILIZE

適合環保 RoHS

CIRCUIT BOARD SIZE

(Vertical view)

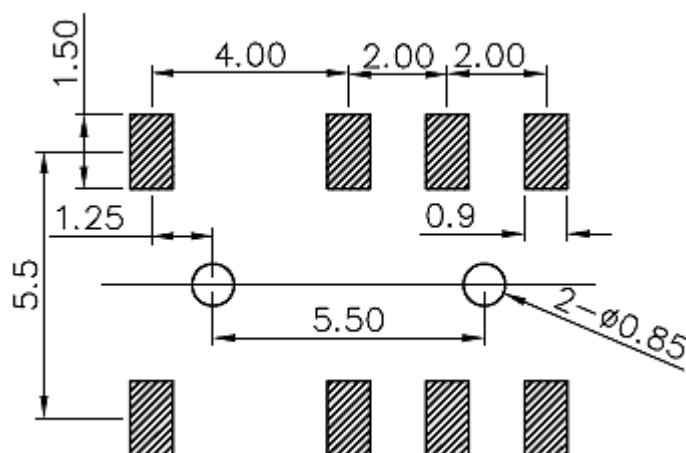


等级 项目			A 级[产品]	B 级[产品]	C 级[产品]
机械性能	端子强度		3N for 1 min.	2N for 1min.	
	操作强度	工作方向	2. 5N (250grams) ± 100gf		
		拉引方向	2. 5N[(250grams) ± 100gf]		

PIN Assignment

Material declaration

No.	NAME	Type	Description
① A	基座	1	LCP(Black)热塑性
② B	嵌件	1	磷铜 C5191(镀银)
③ C	簧片	2	覆银铜(接触面镀银)
④ D	内盖	1	不锈钢(Q235-A 镀银)
⑤ E	拨柄	1	PA66 尼龙
⑥ F	盖板	1	不锈钢(Q235-A 镀银)

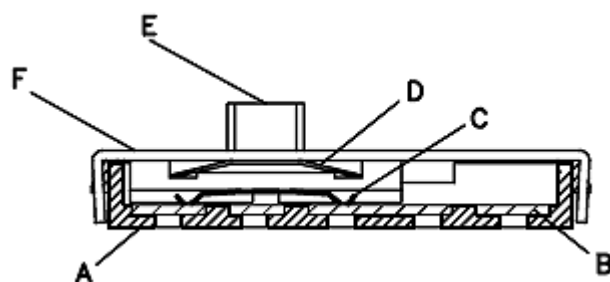

本品不屬於危害性廢棄物,須丟棄時可以委託回收商予以回收再生處理。Products do not belong to hazardous waste, When waste can recycling processing

運送時本產品不要直接與水、酸鹼性化學物質接觸,或放置於含有以上氣體環境中,並且需要注意會有滑落、側翻的危險發生;運輸過程中不能有碰撞或者擠壓,須保證溫度與濕度適中[常溫 25℃,濕度在 50℃ 以內],不可導致材料變形或氧化。

注記 NOTICE

1. 碩方電子公司擁有最終解釋權; The company reserves the right of final interpretation;
2. 文件禁止外洩、轉載; Leaked and reproduced prohibited;
3. 未經授權修改無效。Modify is invalid.