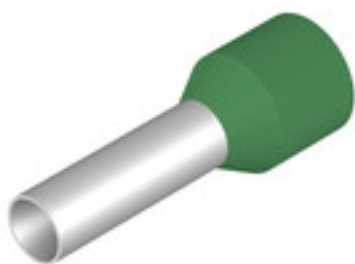


**H1,5/14S GN BD GSP****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

[www.weidmueller.com](http://www.weidmueller.com)**Similar to illustration**

- Linked wire-end ferrules on reel (5,000 pcs.)
- Weidmüller colour code
- DIN colour code
- other colour code

**General ordering data**

|            |                                                |
|------------|------------------------------------------------|
| Version    | Wire-end ferrule, Standard, 10 mm, 8 mm, green |
| Order No.  | <a href="#">9028370000</a>                     |
| Type       | H1,5/14S GN BD GSP                             |
| GTIN (EAN) | 4032248318537                                  |
| Qty.       | 5,000 pc(s).                                   |
| Packaging  | Reel                                           |

**H1,5/14S GN BD GSP****Weidmüller Interface GmbH & Co. KG**

Klingenbergstraße 26

D-32758 Detmold

Germany

www.weidmueller.com

**Technical data****Dimensions and weights**

|            |         |
|------------|---------|
| Net weight | 0.146 g |
|------------|---------|

**Technical data**

| Description of article | Wire end ferrules on reel, green | Version | Standard |
|------------------------|----------------------------------|---------|----------|
|------------------------|----------------------------------|---------|----------|

**Wire-end ferrules**

|                             |                     |                                         |               |
|-----------------------------|---------------------|-----------------------------------------|---------------|
| Collar diameter (D2)        | 4 mm                | Colour code                             | Miscellaneous |
| Conductor cross-section     | 1.5 mm <sup>2</sup> | Contact surface diameter (D1)           | 1.7 mm        |
| Contact surface length (L2) | 8 mm                | L1 in mm                                | 14 mm         |
| Metal sleeve thickness (S1) | 0.15 mm             | Plastic collar thickness (S2)           | 0.28 mm       |
| Stripping length            | 10 mm               | Wire connection cross section AWG, max. | AWG 16        |

**Classifications**

|             |             |             |             |
|-------------|-------------|-------------|-------------|
| ETIM 6.0    | EC000005    | ETIM 7.0    | EC000005    |
| ETIM 8.0    | EC000005    | ECLASS 9.0  | 27-40-02-01 |
| ECLASS 9.1  | 27-40-02-01 | ECLASS 10.0 | 27-40-02-01 |
| ECLASS 11.0 | 27-40-02-01 | ECLASS 12.0 | 27-40-02-01 |

**Approvals**

|      |         |
|------|---------|
| ROHS | Conform |
|------|---------|

**Downloads**

|                    |                                                                                          |
|--------------------|------------------------------------------------------------------------------------------|
| Engineering Data   | <a href="#">WSCAD, EPLAN</a>                                                             |
| User Documentation | <a href="#">Technical information - EN</a><br><a href="#">Technical information - DE</a> |
| Catalogues         | <a href="#">Catalogues in PDF-format</a>                                                 |

**H1,5/14S GN BD GSP**

**Weidmüller Interface GmbH & Co. KG**  
Klingenbergstraße 26  
D-32758 Detmold  
Germany

[www.weidmueller.com](http://www.weidmueller.com)

**Drawings**

**Drawing**

