

4.00 [0.16"]


•

ABSOLUTE MAXIMUM RATINGS AT 25°C AMBIENT	VALUES	UNITS
POWER DISSIPATION	72	mW
CONTINUOUS FORWARD CURRENT	30	m A
PEAK FORWARD CURRENT (1/10 DUTY CYCLE, 10ms PULSE WIDTH)	125	m A
REFLOW SOLDERING TEMPERATURE FOR 5 SEC.	260	°C
OPERATING TEMPERATURE	-40 TO +85	°C
STORAGE TEMPERATURE	-40 TO +85	°C

OPERATING CHARACTERISTICS AT 25°C AMBIENT											
LED COLOR	TEST CONDITION (mA)		LUMINOUS INTENSITY (mcd)		FORWARD VOLTAGE (V)		DOMINANT WAVELENGTH (nm)		REVERSE CURRENT (uA)	VIEWING ANGLE (DEGREES)	
	TYP	MIN	TYP	MAX	MIN	MAX	MIN	MAX	MAX	TYP	
RED	20	630	1000	1600	1.8	2.4	620	630	10	30	

REV	ECN NO	REVISIONS	DRN	CKD	APP	QA	СМ	DATE
A	95158	NEW RELEASE	LD	NO	CS			7-14-22
В	99313	VIEWING ANGLE WAS 130	LD		CS			11-3-22

RECOMMENDED ROHS SOLDER PROFILE

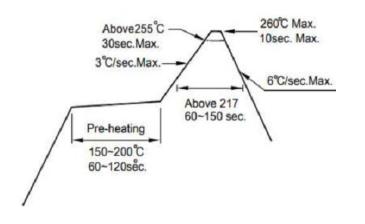

NOTES:

- 1. DIALIGHT PART NUMBER: 597-6022-107F is a 7in. reel with 2000 pieces.
- 597-6022-102F is a 20 pc sample strip.

 2. THIS PRODUCT IS ROHS COMPLIANT. EACH BAG IS TO BE MARKED WITH ROHS COMPLIANT LABEL OR EQUIVALENT MARKINGS. LED MUST BE Pb FREE.
- 3. LED is MSL 3





THIS DRAWING AND THE CONTENTS HEREIN ARE CONFIDENTIAL AND THE SOLE PROPERTY OF DIALIGHT CORP. REPRODUCTION OF THIS DRAWING OR CONSTRUCTION OF ANY PARTS WITHIN THIS DRAWING ARE FORBIDDEN WITHOUT THE WRITTEN CONSENT OF DIALIGHT CORP.

DRAWING NUMBER SCALE: 20.000 ALL DIM's: INCH (mm) В C-18572 TOLERANCES: UNLESS OTHERWISE SPECIFIED FRACTIONS: ±1/64 DECIMALS (.XX): $\pm.01$ SM 1206 RED REVMT W/ LENS DECIMALS (.XXX): ±.005 DECIMALS (.XXXX): ±.0005 ANGLES: ±1° FINISH 1501 ROUTE 34 SOUTH FARMINGDALE, NJ 07727 (732) 919–3119 www.dialight.com FSCM 83330 FAMILY TABLE:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Dialight:

597-6022-107F