

1000BASE-T TRANSFORMER MODULES

Industrial grade



- Compliant with IEEE 802.3 standards
- 350pH OCL with 8mA DC bias at 100KHz 100mV
- Lead finish: Pure tin
- Moisture Sensitivity Level: 1



Electrical Specifications @ 25 °C – Operating Temperature –40 °C to +85 °C

Part Number	Insertion Loss (dB MAX)	Return Loss (dB MIN)				Crosstalk (dB MIN)			CM to CM Rejection Ratio (dB MIN)			DC to CM Rejection Ratio (dB MIN)			Dielectric Withstanding Voltage @60s (Vrms MIN)
	0.1-100 MHz	30 MHz	60 MHz	80 MHz	100 MHz	30 MHz	60 MHz	100 MHz	30 MHz	60 MHz	100 MHz	30 MHz	60 MHz	100 MHz	
R5001NL	-1.2	-18	-12	-10	-8	-43	-37	-33	-40	-35	-30	-43	-37	-33	1500 Vrms

Notes: Add suffix "T" to part number for Tape & Reel package (ie: **R5001NLT**).

Mechanical

R5001NL

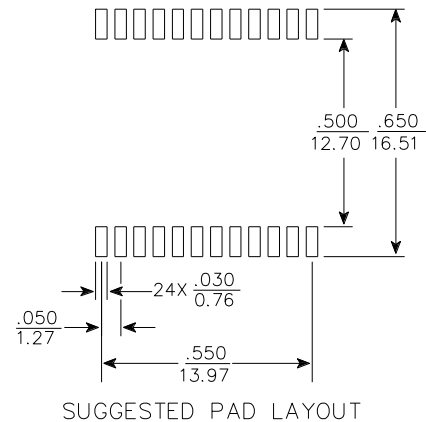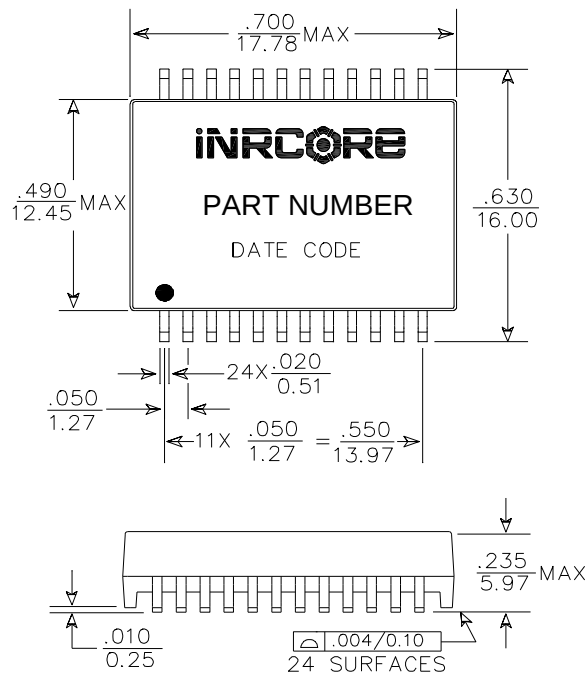

Dimensions: $\frac{\text{Inches}}{\text{mm}}$


Unless otherwise specified, all tolerances are: $\pm \frac{.010}{0.25}$




Electrical Schematic

R5001NL


CHANNEL 1

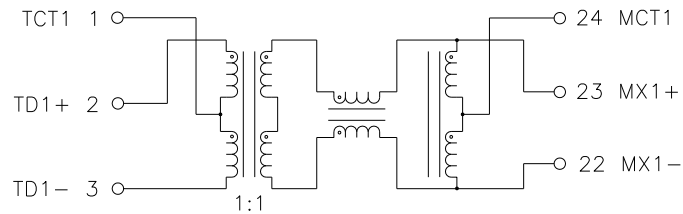


CHANNEL 2

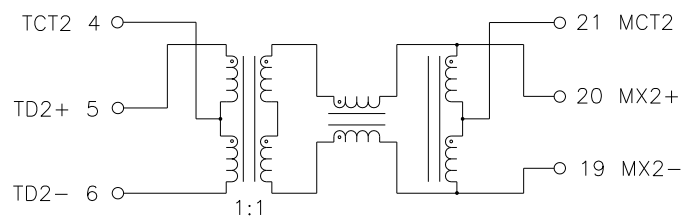


CHANNEL 3

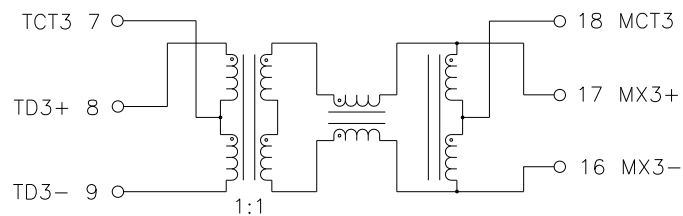

CHANNEL 4

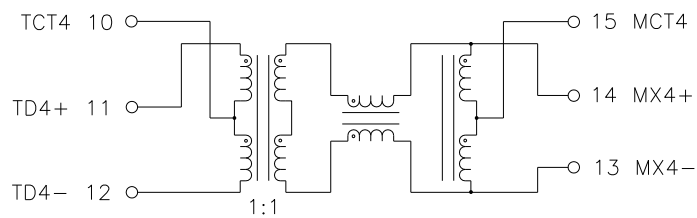


LEGEND



ALL CHANNELS ARE
IN PHASE BETWEEN
INPUT AND OUTPUT

Non-Lead Recommended Reflow Profile (Based on J-STD-020D)

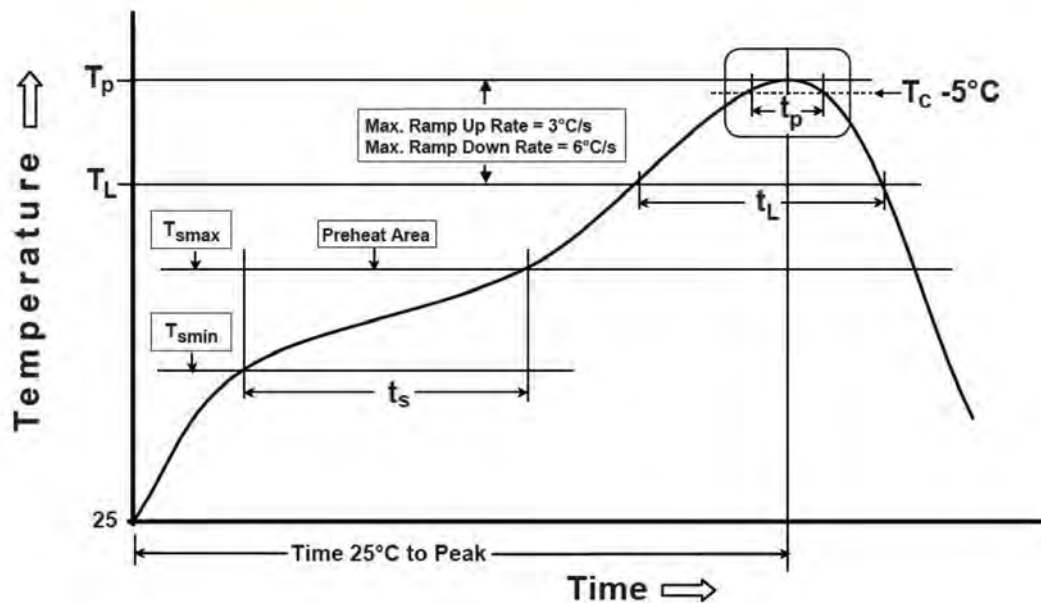

T_{SMIN} (°C)	T_{SMAX} (°C)	T_L (°C)	T_P (°C MAX)	t_s (s)	t_L (s)	t_p (s MAX)	Ramp-up rate (T_L to T_P)	Ramp-down rate (T_P to T_L)	Time 25°C to peak temperature (s MAX)
150	200	217	245	60-120	60-150	30	3°C/s MAX	6°C/s MAX	480

Notes:

1. All temperatures measured on the package leads.
2. Maximum times of reflow cycle: 2.

For More Information

iNRCORE, LLC

311 Sinclair Road Bristol,
PA 19007-6812 U.S.A
Tel: +1.215.781.6400
Fax: +1.215.781.6430

Dongguan iNRCORE Co. Ltd

No.7, An Li Road, Changan Town,
Dongguan City, China
Tel: +0769 8165 9962

Global Sales Representatives and Locations:

<http://www.inrcore.com>



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[iNRCORE:](#)

[R5001NL](#) [R5001NLT](#)