
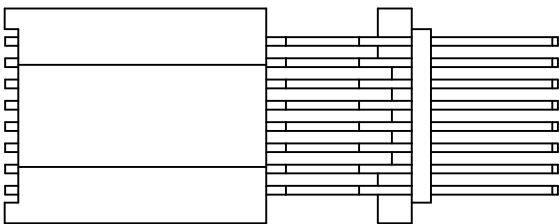
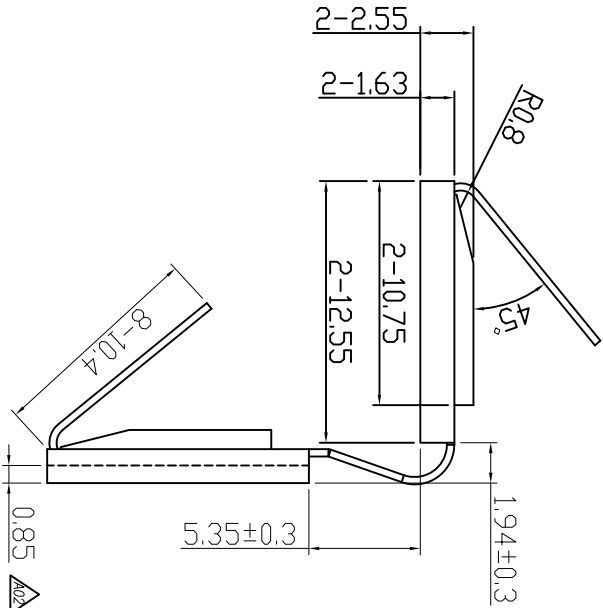


CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RJ45 双网口转接头90度支架1*2	MJ88Z-BX12-HPR1

REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	XSY	2015.06.24
A02	—	修改产品尺寸	XSY	2015.11.30

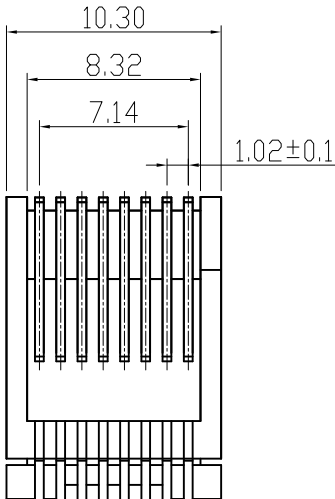

MJ88Z-BX12-HPR1

X	Terminal Plating
0	Au 1" Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

- SPECIFICATION
- VOLTAGE RATING: 125 VAC RMS.
 - CURRENT RATING: 1.5 AMP
 - CONTACT RESISTANCE: 50 mΩ MAX
 - INSULATION RESISTANCE: 500MΩ MIN.
 - WITHSTAND VOLTAGE:
AC1000V RMS 50Hz or 60Hz MIN.
 - OPERATING TEMPERATURE: -40°C~+80°C

b	TERMINAL	1	PHOSPHOR BRONZE T=0.35mm	AU PALTING	
a	HOUSING	2	PBT UL94V-0	BLACK	
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR	Remark

UNLESS OTHERWISE SPECIFIED TOLERANCES		SCALE:1/1	UNIT: mm	Φ	DWG.NO:
DECIMALS: X :±0.5 X :±2 X.X :±0.3 X.XX :±0.2		SIZE: A3	PAGE:1 OF 1	REV: A02	W-061-165
ANGLES: X :±2° X.X :±1° X.XX :±0.2		APPROVED BY	CHECKED BY	PREPARED BY	
		DICK	XSY	XSY	