
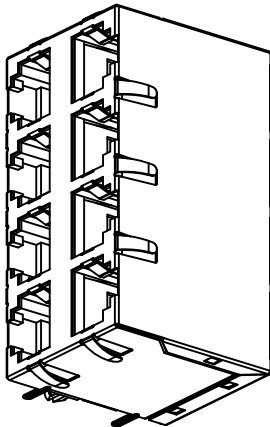





REV.	ECN NO	DESCRIPTION	REVISED	DATE
A01	—	New Release	YST	2020.09.05

CATEGORY	DESCRIPTION	P/N #
CONNECTOR	RU11 6P6C 2x4 DIP 带弹无灯	MJ5966B-BX24-HPRDS1

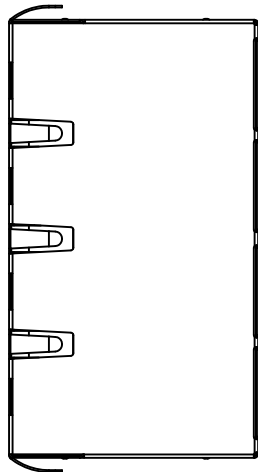


SPECIFICATIONS:

1. RU Electrical Characteristics
 - 1-1: Voltage: 150V AC RMS
 - 1-2: Current Rating: 1.5A
 - 1-3: Contact Resistance: 40mΩ MAX.
 - 1-4: Insulation Resistance: 500MΩ MIN.
 - 1-5: Dielectric Withstand Voltage :1000V AC
 - 1-6: Operature Temperature: -40°C~80°C

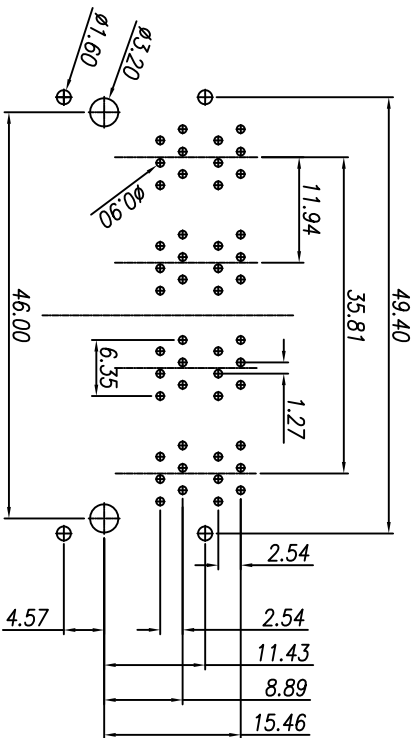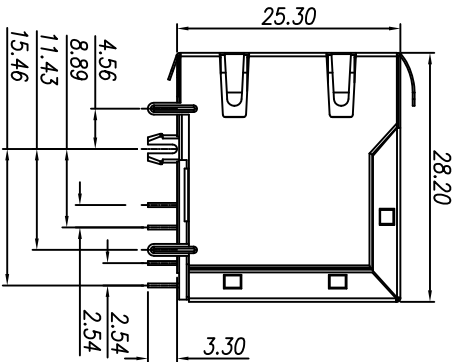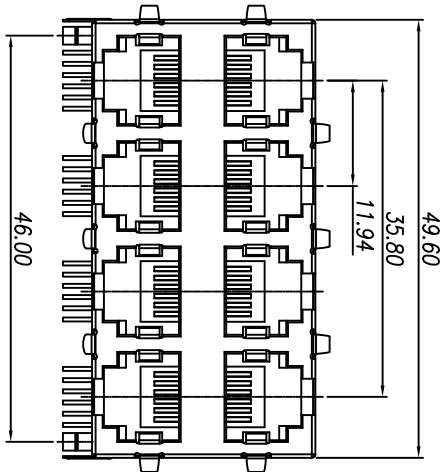

MJ5966B-BX24-HPRDS1

PC BOARD COMPONENT SIDE SHOWN

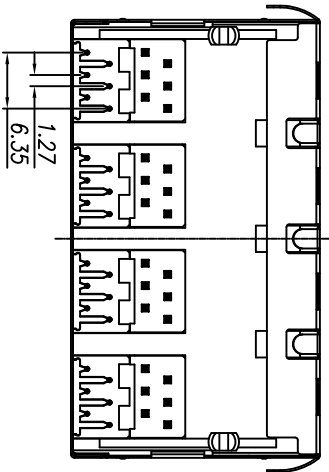

X	Terminal Plating
0	G/F Plating
1	Au 3u" Plating
2	Au 6u" Plating
3	Au 15u" Plating
4	Au 30u" Plating

d	Shielding	1	Brass, T=0.2mm	NI Plating
c	Terminal	48	Phosphor Bronze, Ø0.46	Au Plating
b	Insert	8	PBT UL94V-0	Black
a	Housing	1	PBT UL94V-0	Black
NO.	PART NAME	QTY	MATERIAL	PLATING & COLOR

UNLESS OTHERWISE SPECIFIED TOLERANCES

DECIMALS:	ANGLES:
X :±0.5	X :±2°
X.X :±0.3	X.X :±1°
X.XX :±0.2	

东莞市合陵电子有限公司	
DongGuan Heling Electronic Co.,LTD	
Connector	
SCALE:1/1	UNIT: mm
SIZE: A3	PAGE:1 OF 1
REV:A01	DWG.NO:
APPROVED BY	CHECKED BY
DICK	XSY
	PREPARED BY
	YST

CUSTOMER COPY